



**PBM Motor and Fan ( Suzhou ) Co., Ltd**

No.69 Weixin Road,Suzhou Industrial Park,Suzhou, City,Jiangsu Province,P.R.China

Tel: +86 512 6858 1674

Fax: +86 512 6858 1574

Sales Department: sales@pbmmf.com

After Sales Department: daniel@pbmmf.com



**PBM MOTOR AND FAN(SUZHOU) CO.,LTD**



Axial Fan



Backward & Forward Curved Centrifugal Fan



Blower

# CONTENTS

## EC-DC Series

|                                    |       |
|------------------------------------|-------|
| ■ Axial Fans                       | 02-10 |
| ■ Backward Curved Centrifugal Fans | 11-34 |
| ■ Forward Curved Centrifugal Fans  | 35-41 |
| ■ Single Inlet Blowers             | 42-49 |
| ■ Dual Inlet Blowers               | 50-51 |

## EC-AC Series

|                                    |         |
|------------------------------------|---------|
| ■ Axial Fans                       | 53-65   |
| ■ Backward Curved Centrifugal Fans | 66-97   |
| ■ Forward Curved Centrifugal Fans  | 98-105  |
| ■ Single Inlet Blowers             | 106-113 |
| ■ Dual Inlet Blowers               | 114-120 |

## Technology

|                     |         |
|---------------------|---------|
| ■ Accessories       | 121-123 |
| ■ Wiring Diagrams   | 124-133 |
| ■ Technical Support | 134-140 |

# About us



## Company Profile

PBM is a China mainland EC(Electronically Commutated) brushless motor manufacturing and technology consulting company offering an extensive range of EC motors, fans and intelligent ventilation solutions for air-moving precisely and constantly with maintenance-free throughout the life cycle of products in last decades.

## R&D and Technical Support

Our R&D and technical support team commits to combine interactively external motor technology, integrated electronic control circuit and aerodynamic design of fan impeller that satisfied customers' requirements in different applications by innovative fan solutions, with leading experiment equipment, meters, tools in laboratory for motor reliability and fan air performance testing. We are pursuing extremely compact brushless permanent magnet synchronous external rotor motor to drive various impeller types and sizes: diagonal axial, backward and forward curved centrifugal, radial, single inlet and dual inlet blower, tangential, cross flow, from minimum 30mm to 560mm diameter with airflow maximum to 12,000CMH cubic meter per hour (equal to approx. 7,000CFM cubic feet per minutes), Maximum motor input power goes to 1.5KW (equal to 2 horsepower) at rotor diameter 138mm

## Production and Quality Control

Economical efficient supply chain guarantees our manufacturing team and quality management team could constantly offer stable products within promised competitive lead time. We continuously invest on semi-automatic or automatic motor and fan assembly lines, equipment, fixtures and jigs to enhance our cost advantage production capability. Not only adopted in ISO9001 Quality Management System ISO 14000 Environment Management System and ISO 45001 Occupational Health and Safety Management system, but also adopted in a long-term Eco-friendly and People-oriented sustainable development of company for last 10 years.

## Marketing and Sales

Hundreds of worldwide ventilation, refrigeration, air purification, home appliance, companies from more than fifty countries are adopting PBM EC green-tech motorized fans in their product units and systems that were protecting natural environment and indoor environment of our home to be sustainable green and clean. Our agent and distributor network and online service team covered popular EC fan markets to ensure prompt technical support.

## Vision and Mission

Focus on EC fan only and protect our world with intelligent energy efficient motor and fan solutions are our goal in an attempt to make tomorrow a greener & healthier world.

# EC Fans' Technical Features Overview

## Intelligent EC Fan Technology Introduction

PBM series EC (Electronically Commuted) Fans combine interactively external motor technology, integrated electronic control circuit and aerodynamic design of fan impeller that satisfied customers' requirements in different applications and industries by innovative air-moving solutions.

We are pursuing Ultra-low Energy Consumption fans by extremely compact brushless permanent magnet synchronous external rotor motor to drive various of aerodynamic optimized impeller and scroll-housing types and sizes: diagonal axial, backward and forward curved centrifugal, radial, single inlet and dual inlet blower, tangential, cross flow.

**Impeller Sizes:** From minimum 30mm to 630mm diameter;

**Sound Level:** From 31dB(A) to maximum 89dB(A) according to different rotation speed;

**Air Flow:** Maximum to 16,300CMH, Cubic Meter per Hour, equal to approx. 9,593CFM, Cubic Feet per Minute;

**Air Pressure:** Maxim 1,700Pa, equal to 173.5mm H<sub>2</sub>O and to 6.82 inH<sub>2</sub>O;

**Power:** Maximum motor input power goes to 3.1KW (equal to 4.2hp, horsepower) at motor diameter 138mm.



## Ecofriendly EC Motor Technology Introduction



**EC=Electronically Commutated**  
EC brushless permanent magnet synchronous external rotor motor compact with integrated electronic controller built-in for fan applications.

- Variable speed setting by 0~10V DC or PWM signal input;
- AC(1- or 3-phase) public power grid supply connects to motor directly without transformer, voltage stabilizer with silicon rectifier; no surge current by soft-start and PFC circuit integrated;
- Motor efficiency goes up to Maximum 91% for energy-saving and emissions-reducing;
- Low noise by sine wave 3-core brushless commutation motor design with oblique magnetization;
- Always rotation in the correct direction;
- Operating at either 50Hz and 60Hz; 184~270 VAC 1~;
- Operating at a wide voltage range: 304~456 VAC 3~;
- Operating temperature rise is much cooler in electric motors for longer lifespan.

## Part Number System

P B 3 N 225 B 48 H

H :Number of Derivative Products A/B/C.....

12 :12 VDC

24 :24 VDC

48 :48 VDC

80 :80 VDC

110:110 VDC

310:310 VDC

1A :115 VAC

2A :230 VAC

4A :380 VAC

1E :92~138 VAC-EC

2E :184~270 VAC-EC

4E :304~456 VAC-EC

Input Voltage

Bearing Type

B :Ball Bearing

S :Sleeve Bearing

Dimension

225:Impeller Diameter in mm

Motor Type

K :1 phase Motor with Capacitor

N :EC Brushless Motor

R :Shaded Pole Motor

Number of Poles(AC)

EC :1-core and 3-core

Number of Cores(EC)

AC :2, 4, 6, 8 and 12pole

Fan Type

B :Backward Curved Fan

K :Centrifugal Fans with Support Bracket

F :Forward Curved Fan

D :Dual Inlet Centrifugal Blower

S :Single Inlet Centrifugal Blower

C :Cross Flow Fan

A :Compact Axial Fan

W :Axial Fan with Wall Ring

G :Axial Fan with Guard Grille

M :Motor


P :PBM Motor and Fan




## EC-DC Series



## DC Axial Fan Ø180x70mm

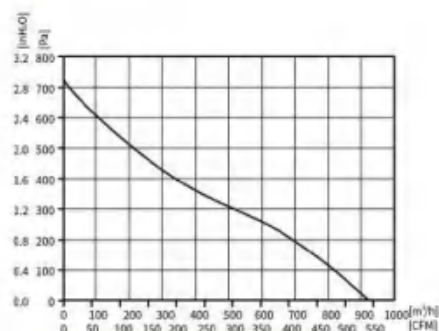


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.8KG  | D2          |

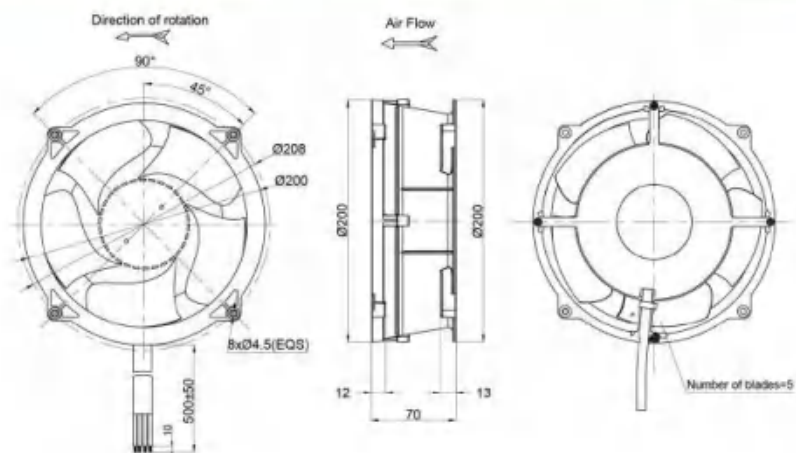


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N180B24H | BE92DC | BALL           | 24            | 16-28             | 4.2           | 100.8       | 4500        | 925      | 709          | 68          |
| PA3N180B48H | BE92DC | BALL           | 48            | 36-57             | 2.1           | 100.8       | 4500        | 925      | 709          | 68          |

## DC Axial Fan Ø200x80mm

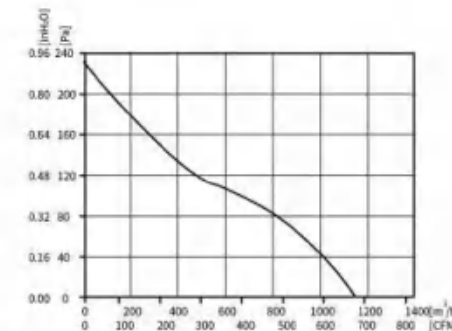


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.4KG  | D2          |


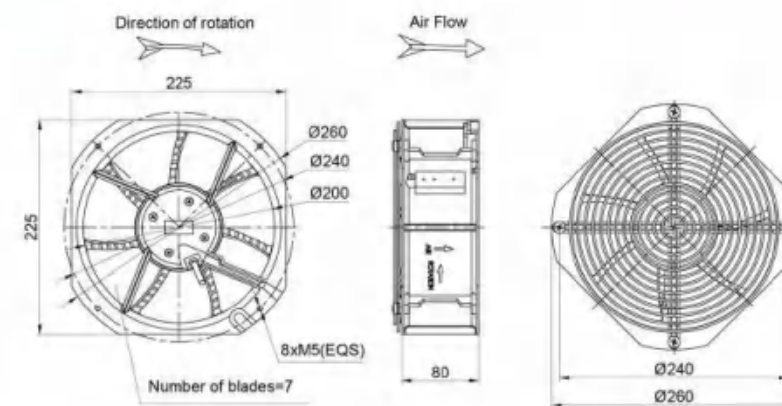


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N200B24H | BE92DC | BALL           | 24            | 16-28             | 1.8           | 43.2        | 2750        | 1150     | 236          | 60          |
| PA3N200B48H | BE92DC | BALL           | 48            | 36-57             | 0.9           | 43.2        | 2750        | 1150     | 236          | 60          |

## DC Axial Fan Ø215x89mm

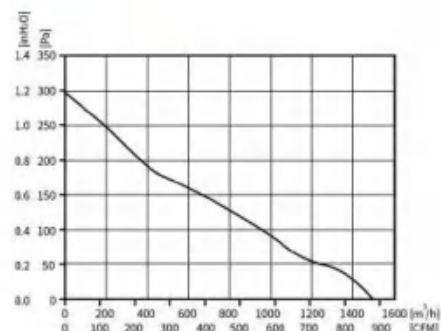


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.1KG  | D2          |

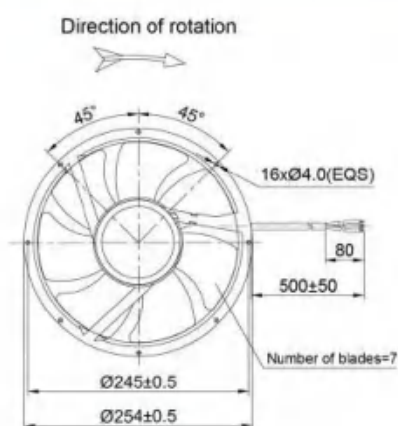


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N215B24U | BE92DC | BALL           | 24            | 16~28             | 1.0           | 91          | 3100        | 1512     | 294          | 69          |
| PA3N215B48U | BE92DC | BALL           | 48            | 36~57             | 0.95          | 91          | 3100        | 1512     | 294          | 69          |

## DC Axial Fan Ø215x89.8mm

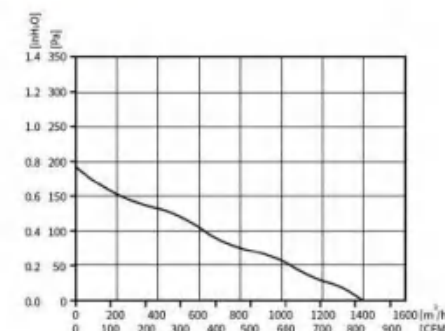


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.1KG  | D1          |

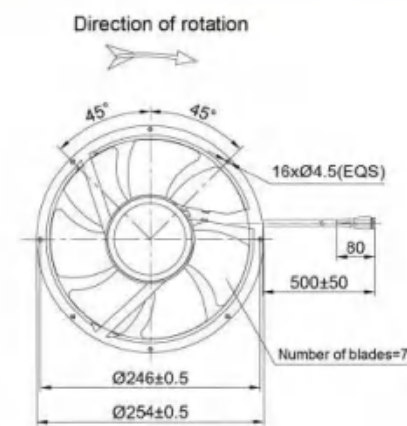


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N215B24H | BE72DC | BALL           | 24            | 16~28             | 1.5           | 72          | 2500        | 1410     | 190          | 65          |
| PA3N215B48H | BE72DC | BALL           | 48            | 36~57             | 0.75          | 72          | 2500        | 1410     | 190          | 65          |

## DC Axial Fan Ø215x89mm

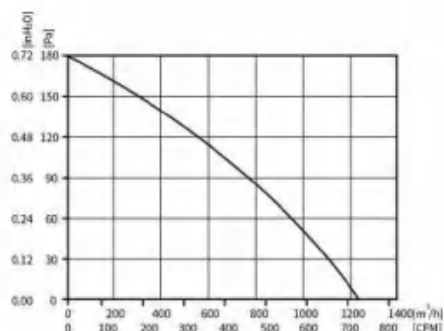


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25℃~+60℃             | 2.8KG  | D2          |

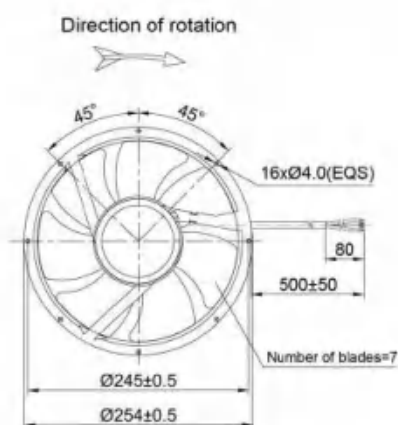


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N215B24M | BE92DC | BALL           | 24            | 16~28             | 2.6           | 62.4        | 2000        | 1230     | 180          | 62          |
| PA3N215B48M | BE92DC | BALL           | 48            | 36~57             | 1.3           | 62.4        | 2000        | 1230     | 180          | 62          |

## DC Axial Fan Ø250x80mm

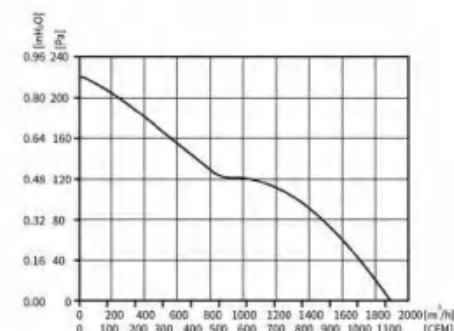


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25℃~+60℃             | 2.5KG  | D2          |

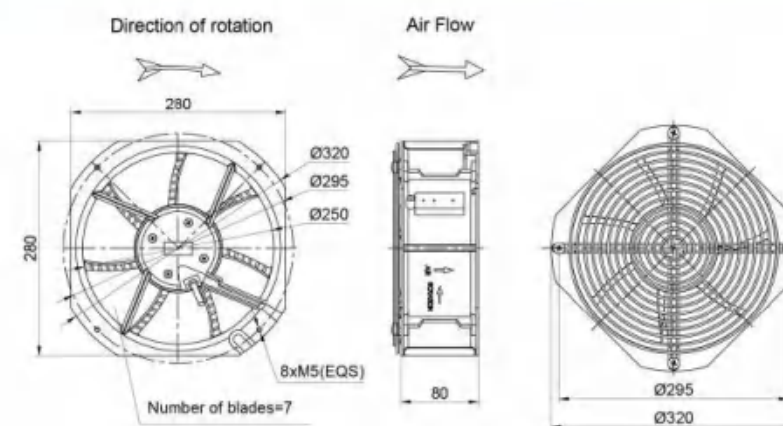


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PA3N250B24H | BE92DC | BALL           | 24            | 16~28             | 4.8           | 115.2       | 2750        | 1900     | 220          | 69          |
| PA3N250B48H | BE92DC | BALL           | 48            | 36~57             | 2.4           | 115.2       | 2750        | 1900     | 220          | 69          |

## DC Axial Fan Ø300x90mm

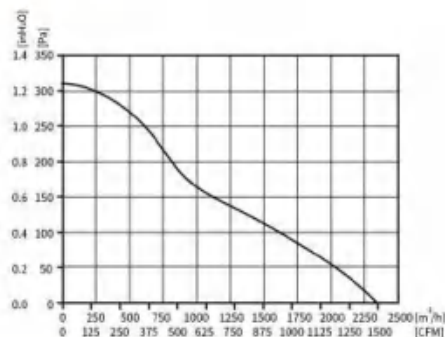


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.5KG  | D2          |

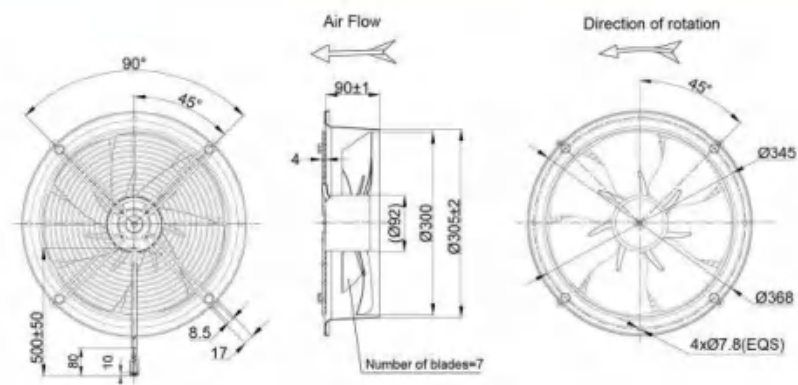


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PW3N300B24H | BE92DC | BALL           | 24            | 16-28             | 6.5           | 156         | 2200        | 2330     | 316          | 65          |
| PW3N300B48H | BE92DC | BALL           | 48            | 36-57             | 3.25          | 156         | 2200        | 2330     | 316          | 65          |

## DC Axial Fan Ø400x140mm

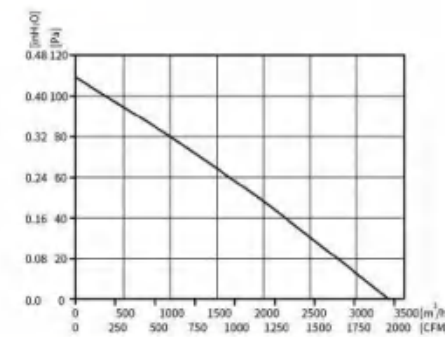


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.1KG  | D3          |

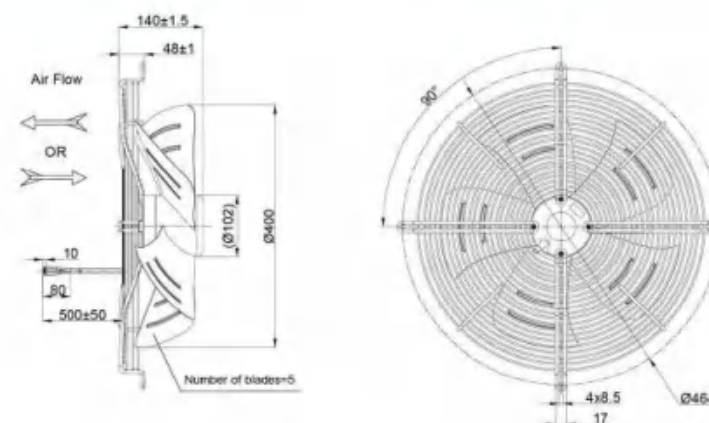



| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N400B24M | BE102DC | BALL           | 24            | 16-28             | 6.4           | 153.6       | 1100        | 3363     | 108          | 58          |
| PG3N400B48M | BE102DC | BALL           | 48            | 36-57             | 3.2           | 153.6       | 1100        | 3363     | 108          | 58          |

Axis Fan

## DC Axial Fan Ø450x124.5mm

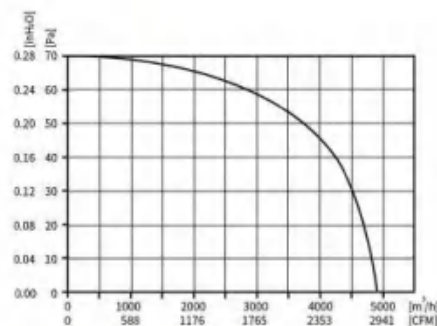


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 6.3KG  | D3          |

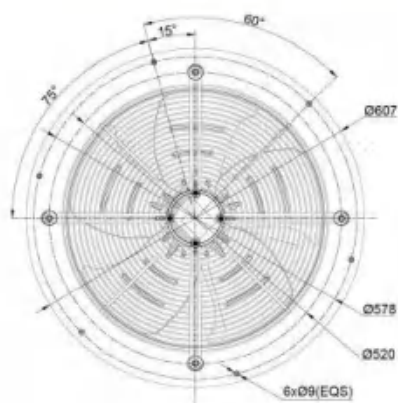
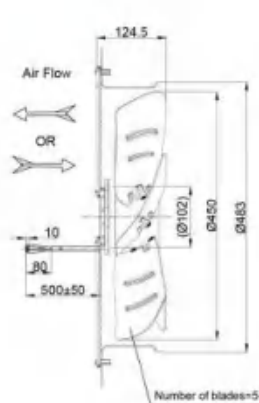


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N450B24M | BE102DC | BALL           | 24            | 16-28             | 6.6           | 160         | 1050        | 4800     | 70           | 60          |
| PG3N450B48M | BE102DC | BALL           | 48            | 36-57             | 3.3           | 160         | 1050        | 4800     | 70           | 60          |

## DC Centrifugal Fan backward Curved Ø133x61mm

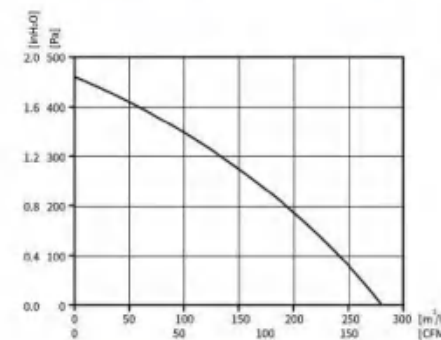


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.51KG | D1          |

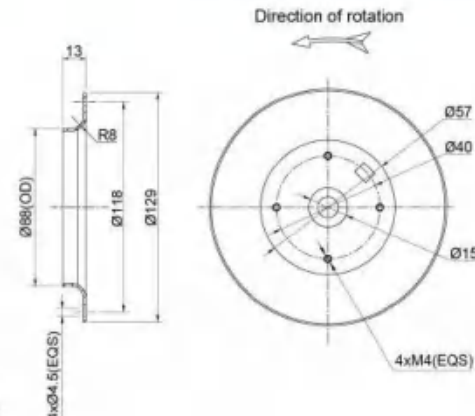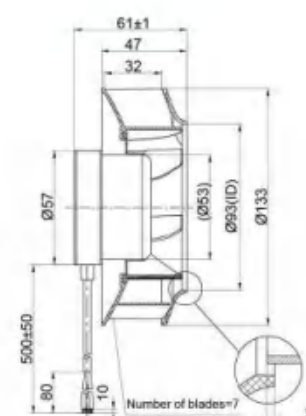


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N133B24M | BE53DC | BALL           | 24            | 16-28             | 1.5           | 36          | 4100        | 276      | 462          | 67          |
| PB3N133B48M | BE53DC | BALL           | 48            | 36-57             | 0.75          | 36          | 4100        | 276      | 462          | 67          |

DC Centrifugal Fan backward Curved Ø133x91mm

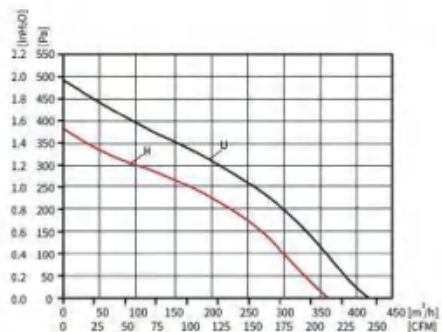


|                                   |               |                 |                  |                       |        |             |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/0-10V | IP44            | B                | -25℃~+60℃             | 0.75KG | D1          |

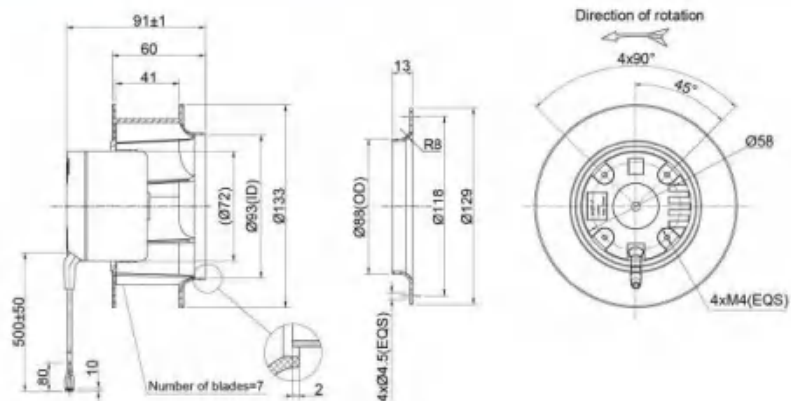


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | IN/S           | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dBA@1m      |
| PB3N133B24U | BE72DC | BALL           | 24            | 16-28             | 1.7           | 40.8        | 4450        | 409               | 492          | 74          |
| PB3N133B48U | BE72DC | BALL           | 48            | 36-57             | 0.85          | 40.8        | 4450        | 409               | 492          | 74          |
| PB3N133B24H | BE72DC | BALL           | 24            | 16-28             | 1.4           | 33.6        | 3900        | 360               | 382          | 63          |
| PB3N133B48H | BE72DC | BALL           | 48            | 36-57             | 0.7           | 33.6        | 3900        | 360               | 382          | 63          |

DC Centrifugal Fan backward Curved Ø175x68mm

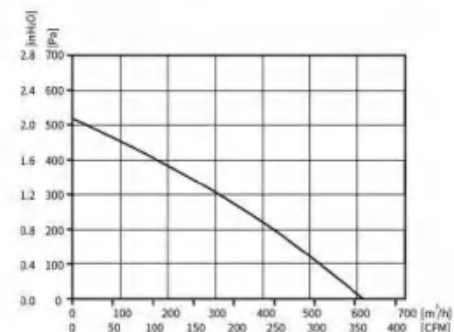


|                                               |                               |                          |                        |                                       |                   |                    |
|-----------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|-------------------|--------------------|
| Motor Type:<br>PERMANENT MAGNET<br>BLDC MOTOR | Speed Control:<br>0-10VDC/PWM | Protection Type:<br>IP44 | Insulation Class:<br>B | Operating Temperature:<br>-25°C~+60°C | Weight:<br>0.75KG | Wiring Mode:<br>D1 |
|-----------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|-------------------|--------------------|

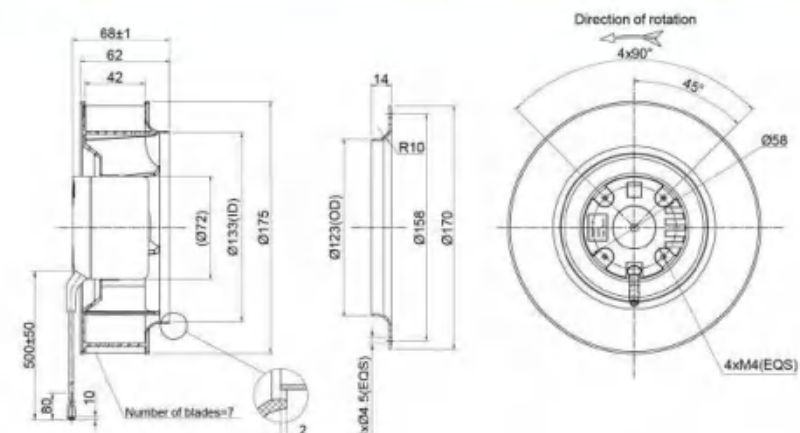


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | B/S            | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dB(A)       |
| PB3N175B12H | BE72DC | BALL           | 12            | 9-15              | 3.7           | 44          | 3300        | 610               | 512          | 68          |

## DC Centrifugal Fan backward Curved Ø175x68mm

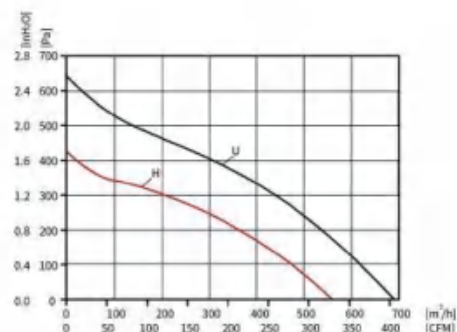


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.75KG | D1          |

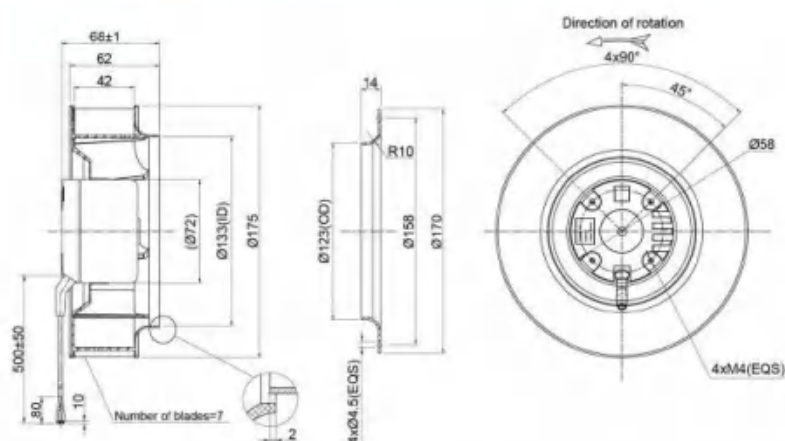


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N175B24U | BE72DC | BALL           | 24            | 16-28             | 3             | 72          | 3900        | 695      | 637          | 72          |
| PB3N175B48U | BE72DC | BALL           | 48            | 36-57             | 1.5           | 72          | 3900        | 695      | 637          | 72          |
| PB3N175B24H | BE72DC | BALL           | 24            | 16-28             | 1.6           | 38.4        | 3100        | 565      | 402          | 65          |
| PB3N175B48H | BE72DC | BALL           | 48            | 36-57             | 0.8           | 38.4        | 3100        | 565      | 402          | 65          |

## DC Centrifugal Fan backward Curved Ø190x69mm

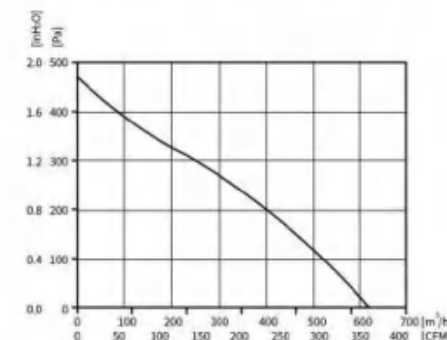


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.97KG | D1          |

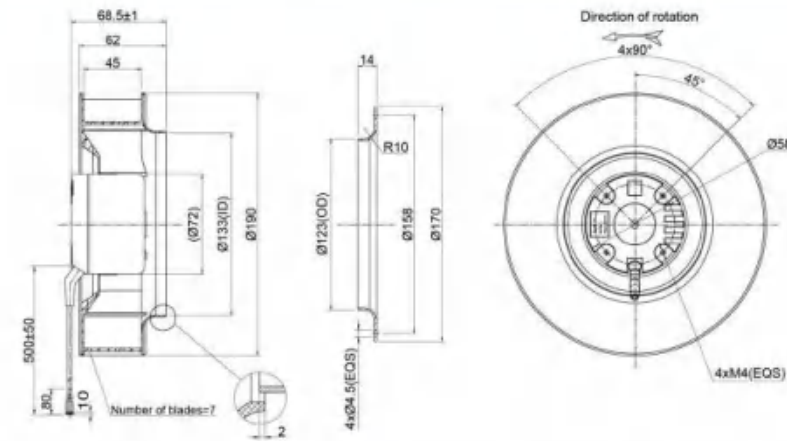


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N190B24M | BE72DC | BALL           | 24            | 16-28             | 2.4           | 57.6        | 2050        | 620      | 473          | 68          |
| PB3N190B48M | BE72DC | BALL           | 48            | 36-57             | 1.2           | 57.6        | 2950        | 620      | 473          | 68          |

## DC Centrifugal Fan backward Curved Ø190x69mm

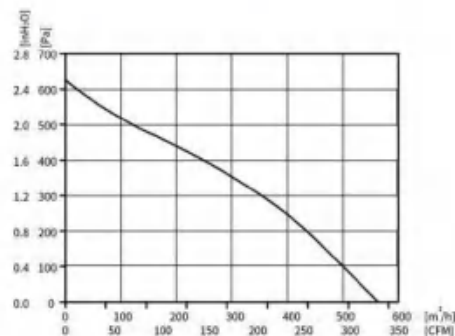


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.4KG  | D2          |

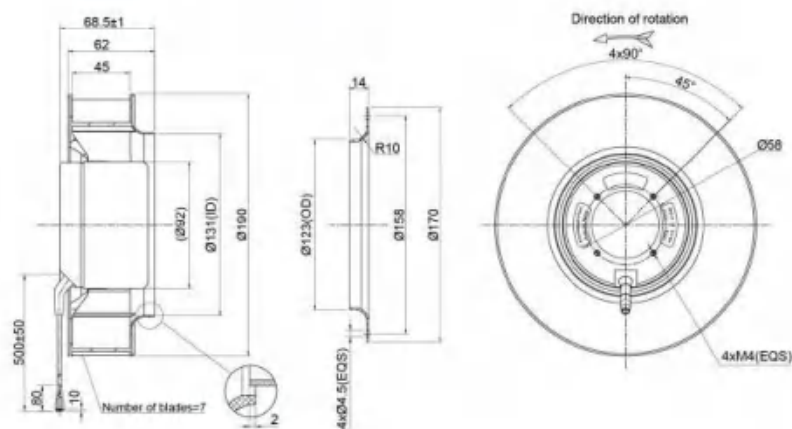


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PB3N190B24H | BE92DC | BALL           | 24            | 16-28             | 3.4           | 81.6        | 3300        | 560      | 627          | 68          |
| PB3N190B48H | BE92DC | BALL           | 48            | 36-57             | 1.7           | 81.6        | 3300        | 560      | 627          | 68          |

## DC Centrifugal Fan backward Curved Ø220x71mm

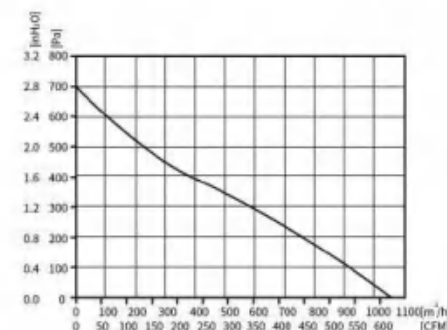


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.65KG | D2          |

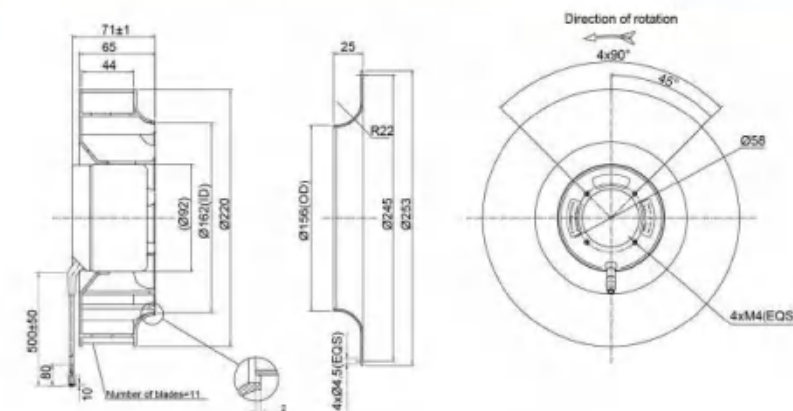


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PB3N220B24H | BE92DC | BALL           | 24            | 16-28             | 4.8           | 115.2       | 3150        | 1055     | 699          | 76          |
| PB3N220B48H | BE92DC | BALL           | 48            | 36-57             | 2.4           | 115.2       | 3150        | 1055     | 699          | 76          |

## DC Centrifugal Fan backward Curved Ø225x99mm

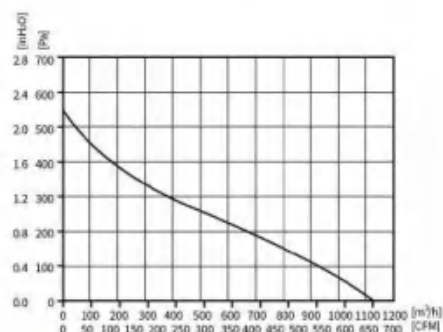


| Motor Type                         | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|------------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTARY MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.75KG | D2          |

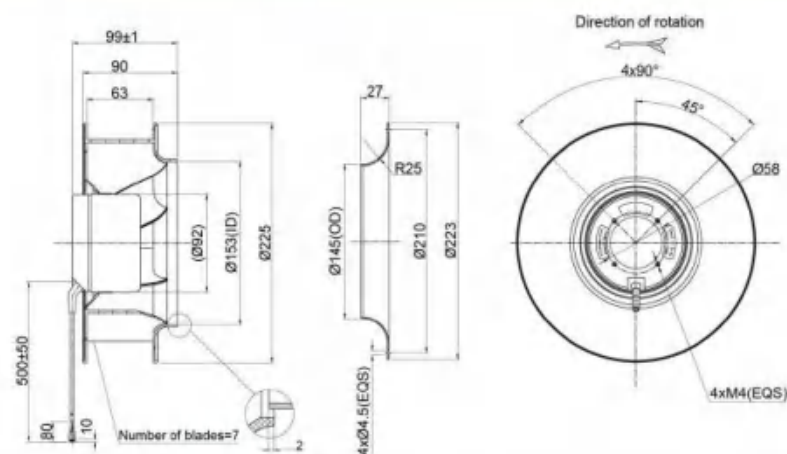


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N225B24H | BE92DC | BALL           | 24            | 16~28             | 4.0           | 96          | 2600        | 1125     | 540          | 72          |
| PB3N225B48H | BE92DC | BALL           | 48            | 36~57             | 2.0           | 96          | 2600        | 1125     | 540          | 72          |

## DC Centrifugal Fan backward Curved Ø250x89mm

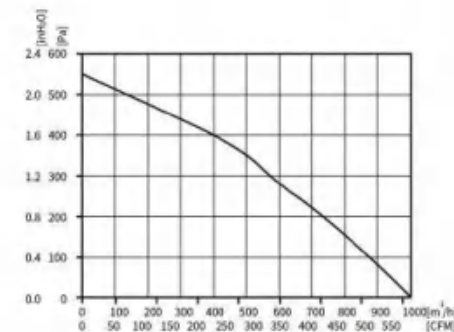


| Motor Type                         | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|------------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTARY MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.4KG  | D2          |

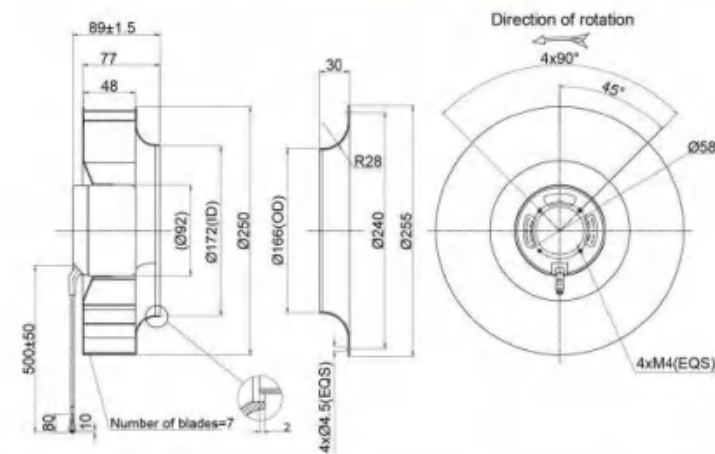


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N250B24H | BE92DC | BALL           | 24            | 16~28             | 5.0           | 120         | 2650        | 1000     | 550          | 73          |
| PB3N250B48H | BE92DC | BALL           | 48            | 36~57             | 2.5           | 120         | 2650        | 1000     | 550          | 73          |

## DC Centrifugal Fan backward Curved Ø250x99mm


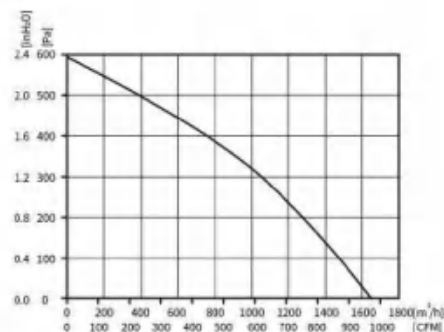


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.13KG | D2          |

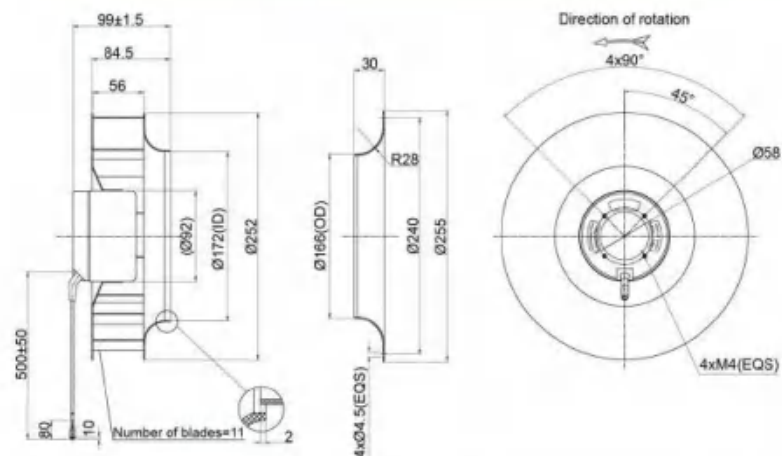


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PB3N250B24M | BE92DC | BALL           | 24            | 16-28             | 6.4           | 153.6       | 2630        | 1650     | 595          | 72          |
| PB3N250B48M | BE92DC | BALL           | 48            | 36-57             | 3.2           | 153.6       | 2630        | 1650     | 595          | 72          |

## DC Centrifugal Fan backward Curved Ø250x123.5mm

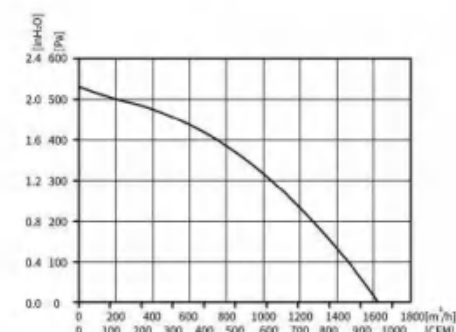



| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.3KG  | D2          |

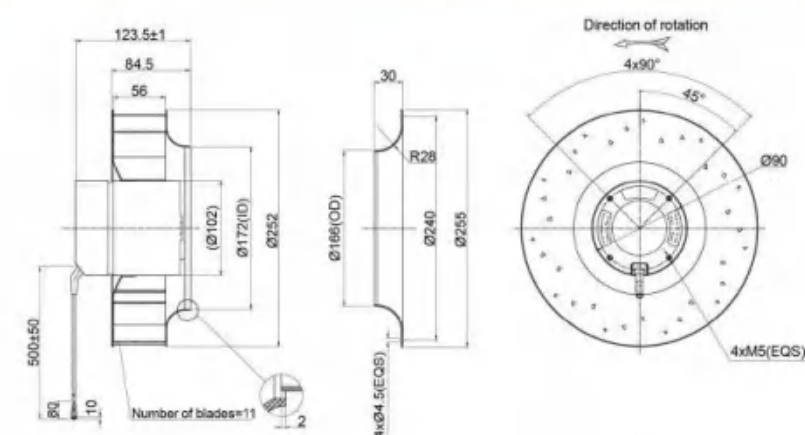


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PB3N250B24L | BE102DC | BALL           | 24            | 16-28             | 5.6           | 134.4       | 2600        | 1640     | 530          | 72          |
| PB3N250B48L | BE102DC | BALL           | 48            | 36-57             | 2.8           | 134.4       | 2600        | 1640     | 530          | 72          |

## DC Centrifugal Fan backward Curved Ø280x99mm

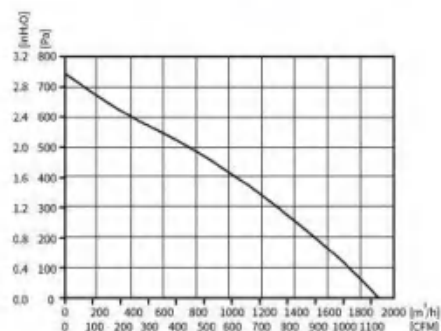



| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.7KG  | D2          |

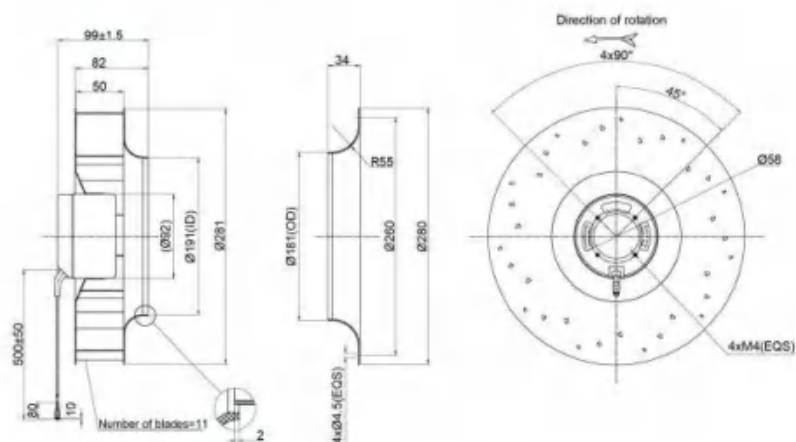


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | I/V            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N280B24M | BE92DC | BALL           | 24            | 16-28             | 9.6           | 230.4       | 2600        | 1030     | 740          | 74          |
| PB3N280B48M | BE92DC | BALL           | 48            | 36-57             | 4.8           | 230.4       | 2600        | 1930     | 740          | 74          |

## DC Centrifugal Fan backward Curved Ø280x125mm

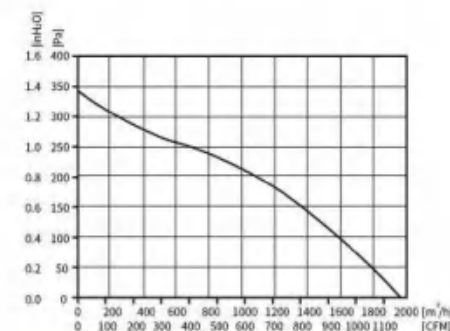



| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.9KG  | D2          |

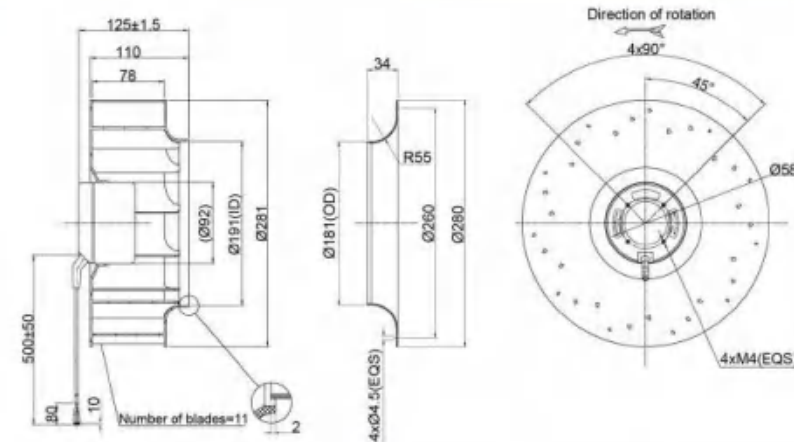


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | I/V            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N280B24L | BE92DC | BALL           | 24            | 16-28             | 4.8           | 115.2       | 1800        | 1960     | 347          | 71          |
| PB3N280B48L | BE92DC | BALL           | 48            | 36-57             | 2.4           | 115.2       | 1800        | 1960     | 347          | 71          |

## DC Centrifugal Fan backward Curved Ø280x150mm

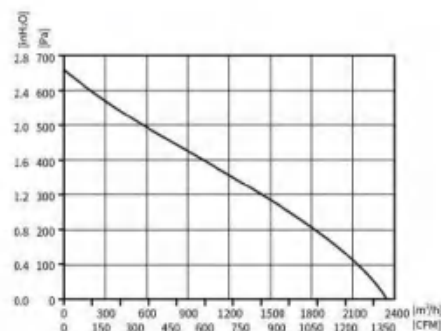


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.7KG  | D3          |

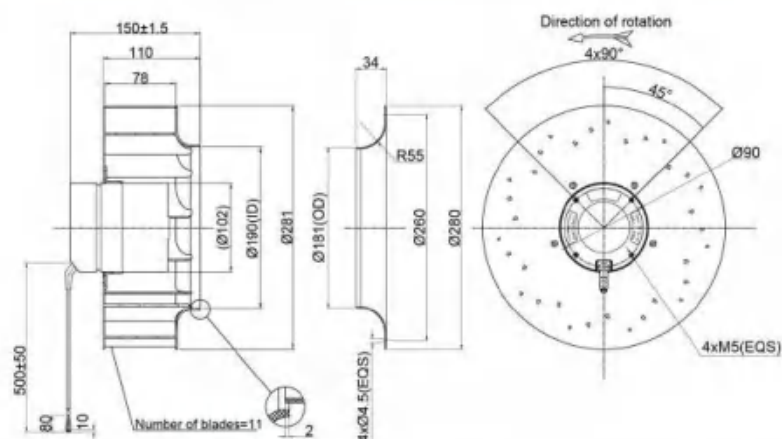


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (dB(A))     |
| PB3N280B48H | BE102DC | BALL           | 48            | 36~57             | 4.5           | 216         | 2200        | 2300     | 650          | 72          |

## DC Centrifugal Fan backward Curved Ø310x120mm

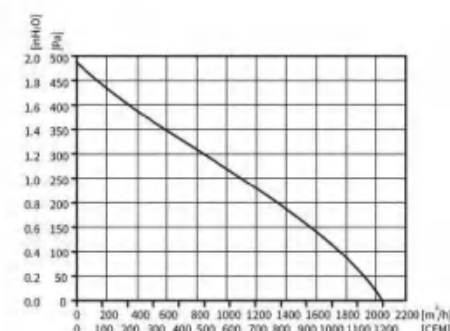


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.9KG  | D2          |

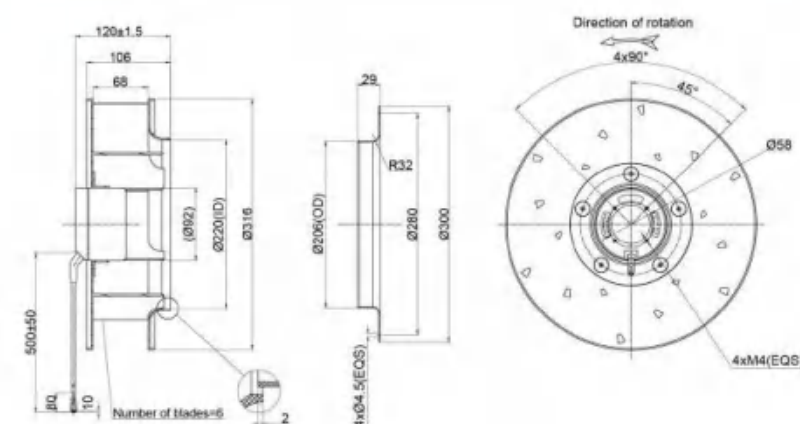


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (dB(A))     |
| PB3N310B24M | BE92DC | BALL           | 24            | 16~28             | 5.6           | 134.4       | 1750        | 2050     | 490          | 67          |
| PB3N310B48M | BE92DC | BALL           | 48            | 36~57             | 2.8           | 134.4       | 1750        | 2050     | 490          | 67          |

## DC Centrifugal Fan backward Curved Ø310x150mm

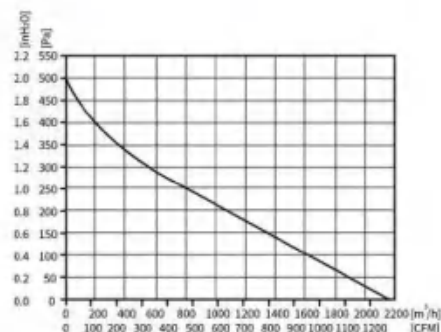


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.1KG  | D2          |

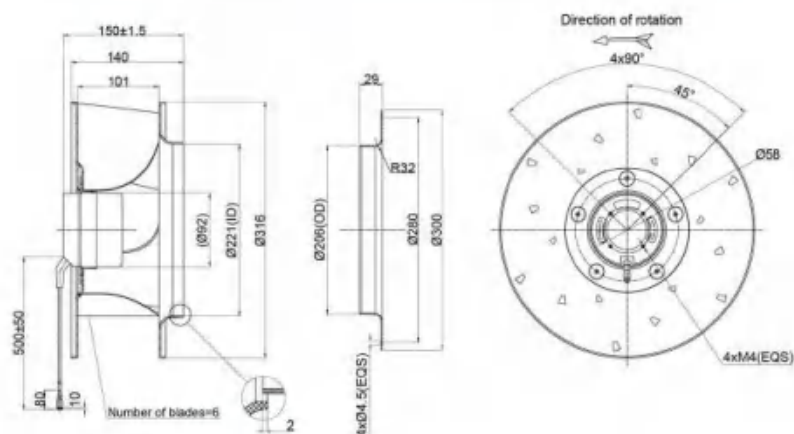


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (dB(A))     |
| PB3N310B24L | BE92DC | BALL           | 24            | 16-28             | 5.2           | 124.8       | 1600        | 2175     | 502          | 64          |
| PB3N310B48L | BE92DC | BALL           | 48            | 36-57             | 2.6           | 124.8       | 1600        | 2175     | 502          | 64          |

## DC Centrifugal Fan backward Curved Ø310x134.5mm

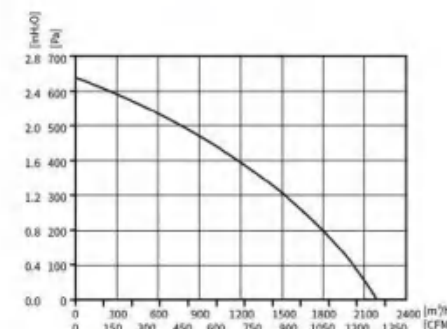


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.85KG | D2          |

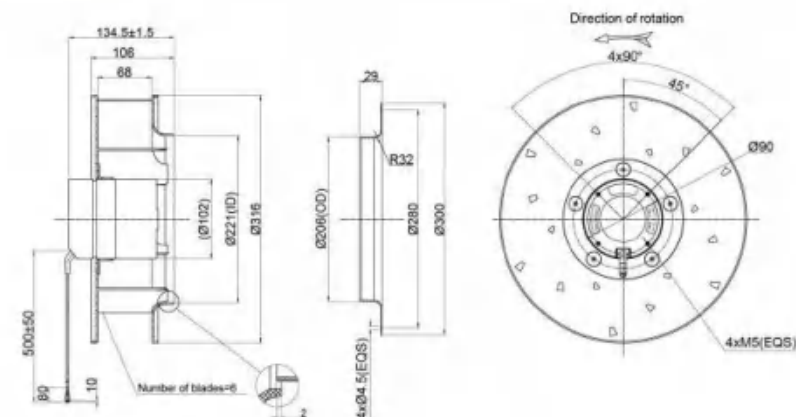


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (dB(A))     |
| PB3N310B24U | BE102DC | BALL           | 24            | 16-28             | 6.8           | 163         | 2060        | 2200     | 640          | 71          |
| PB3N310B48U | BE102DC | BALL           | 48            | 36-57             | 3.4           | 163         | 2060        | 2200     | 640          | 71          |

## DC Centrifugal Fan backward Curved Ø310x150mm

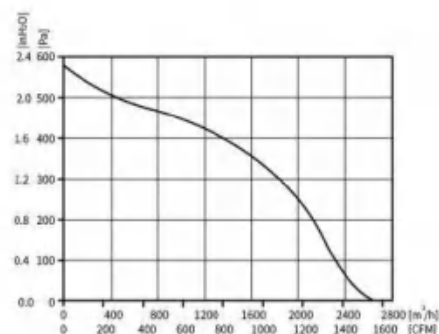


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.95KG | D3          |

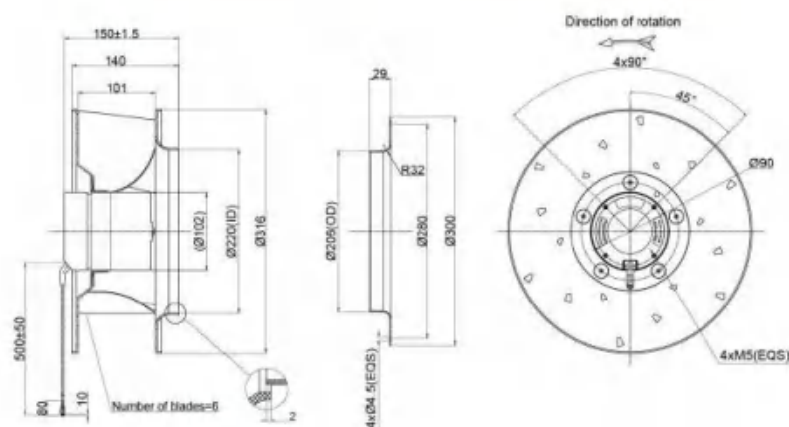


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (1M/A)      |
| PB3N310B24H | BE102DC | BALL           | 24            | 16~28             | 8.8           | 211.2       | 1930        | 2620     | 578          | 69          |
| PB3N310B48H | BE102DC | BALL           | 48            | 36~57             | 4.4           | 211.2       | 1930        | 2620     | 578          | 69          |

## DC Centrifugal Fan backward Curved Ø355x195.5mm

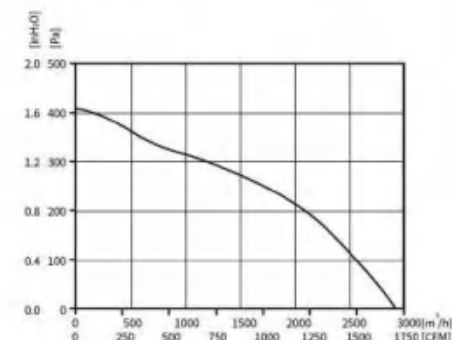


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.4KG  | D3          |

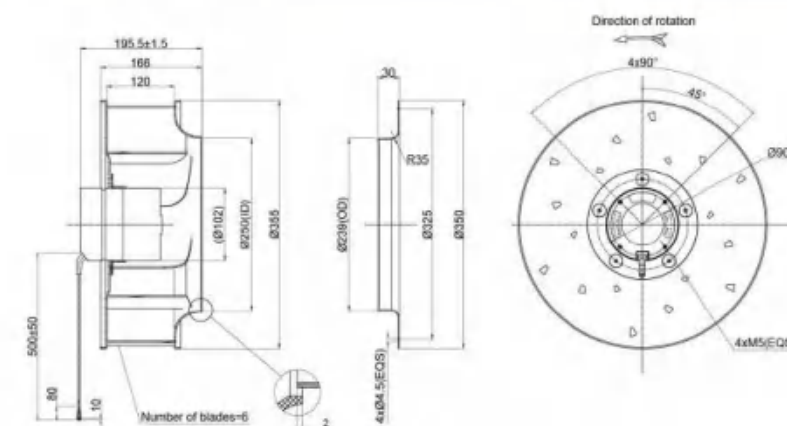


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | (1M/A)      |
| PB3N355B24M | BE102DC | BALL           | 24            | 16~28             | 7.24          | 174         | 1440        | 2890     | 406          | 66          |
| PB3N355B48M | BE102DC | BALL           | 48            | 36~57             | 3.62          | 174         | 1440        | 2890     | 406          | 66          |

## DC Centrifugal Fan backward Curved Ø355x171.5mm

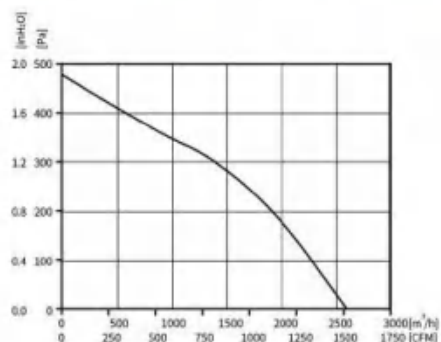


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 4.6KG  | D3          |

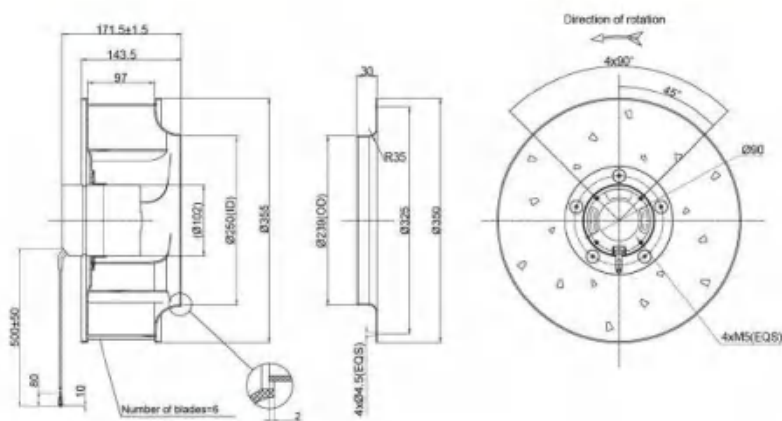


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | I/V            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N355B24H | BE102DC | BALL           | 24            | 16~28             | 6.8           | 163         | 1580        | 2600     | 487          | 69          |
| PB3N355B48H | BE102DC | BALL           | 48            | 36~57             | 3.4           | 163         | 1580        | 2600     | 487          | 69          |

## DC Centrifugal Fan backward Curved Ø355x183mm

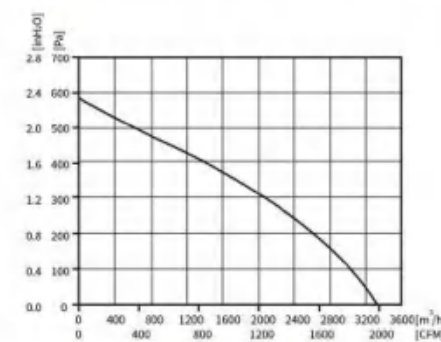


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.1KG  | D3          |

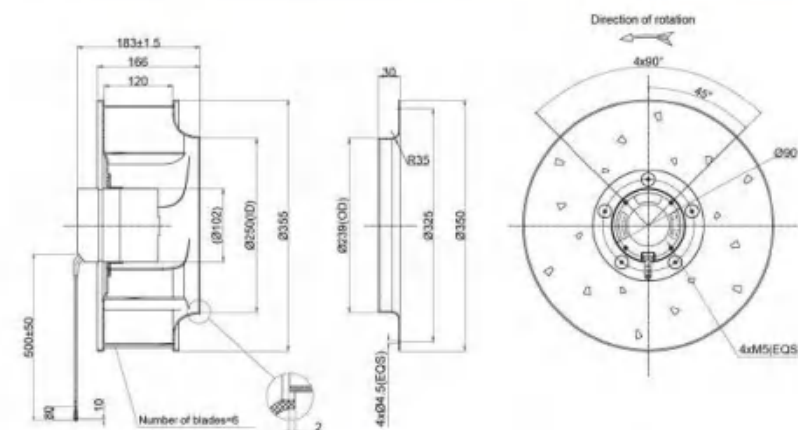


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | I/V            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N355B48U | BE102DC | BALL           | 48            | 36~57             | 3.55          | 340.8       | 1770        | 3357     | 584          | 71          |

## DC Centrifugal Fan

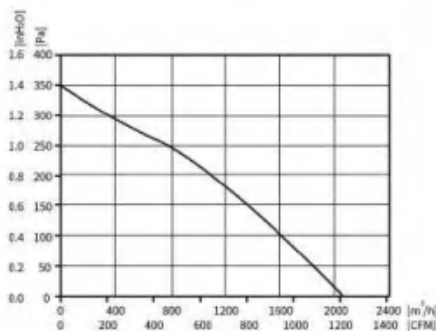


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/0-10V | IP44            | B                | -25℃~+60℃             | 4.6KG  | D3          |

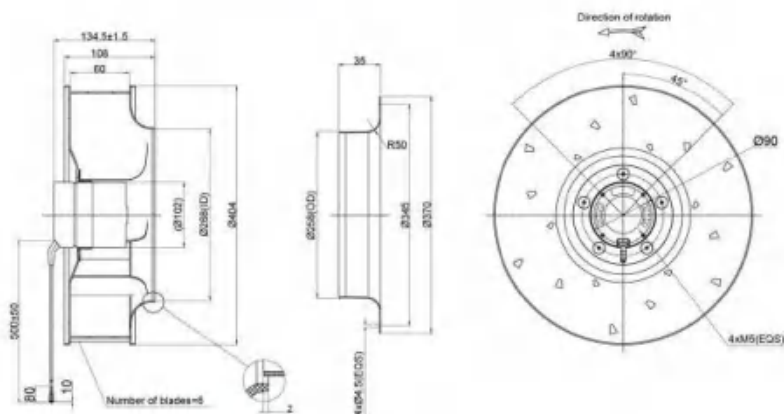


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | (dBA)       |
| PB3N400B24M | BE102DC | BALL           | 24            | 16-28             | 3.1           | 74          | 1280        | 2080              | 346          | 60          |
| PB3N400B48M | BE102DC | BALL           | 48            | 36-57             | 1.55          | 74          | 1280        | 2080              | 346          | 60          |

## DC Centrifugal Fan

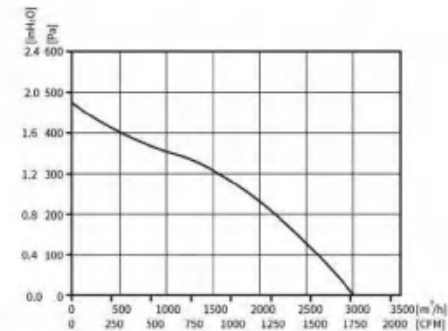


|                                                     |                               |                          |                        |                                       |                  |                    |
|-----------------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|------------------|--------------------|
| Motor Type:<br>DC BRUSHLESS EXTERNAL<br>80TOR-M07DR | Speed Control:<br>0-10VDC/PWM | Protection Type:<br>IP44 | Insulation Class:<br>B | Operating Temperature:<br>-25°C~+60°C | Weight:<br>4.9KG | Wiring Mode:<br>D3 |
|-----------------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|------------------|--------------------|

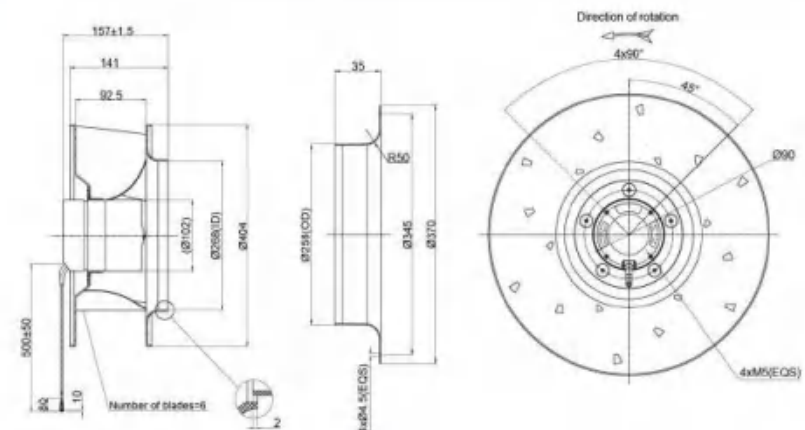


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type    | B/S            | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dBA         |
| PB3N400B24H | BE102DC | BALL           | 24            | 16-28             | 8.4           | 202         | 1290        | 3000              | 473          | 65          |
| PB3N400B48H | BE102DC | BALL           | 48            | 36-57             | 4.2           | 202         | 1290        | 3000              | 473          | 65          |

DC Centrifugal Fan backward Curved Ø400x192.5mm

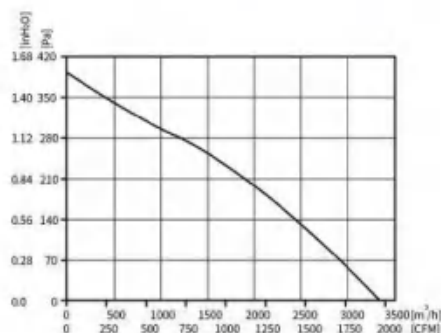


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Winding Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|--------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 5~10VDC/10W   | IP44            | B                | -25℃~+60℃             | 5.3KG  | D3           |

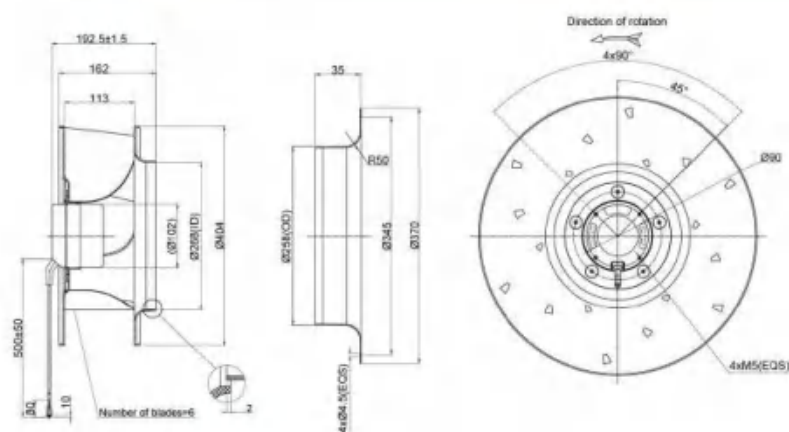


| Model       | Motor   | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type    | M/S            | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dB(A)       |
| PB3N400B24L | BE102DC | BALL           | 24            | 16-28             | 7.78          | 187         | 1190        | 3300              | 382          | 63          |
| PB3N400B48L | BE102DC | BALL           | 48            | 36-57             | 3.89          | 187         | 1190        | 3300              | 382          | 63          |

DC Centrifugal Fan Forward Curved Ø108x66mm

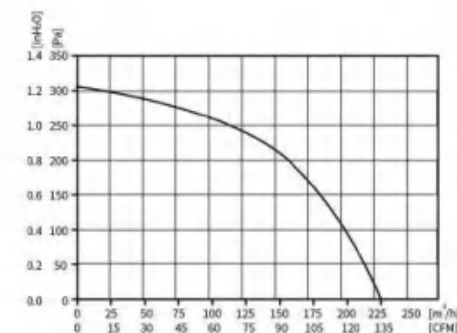


|                                  |               |                 |                  |                       |        |             |
|----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| Motor Type                       | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
| ODORLESS EXTERNAL<br>ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25℃~+60℃             | 0.7KG  | D1          |

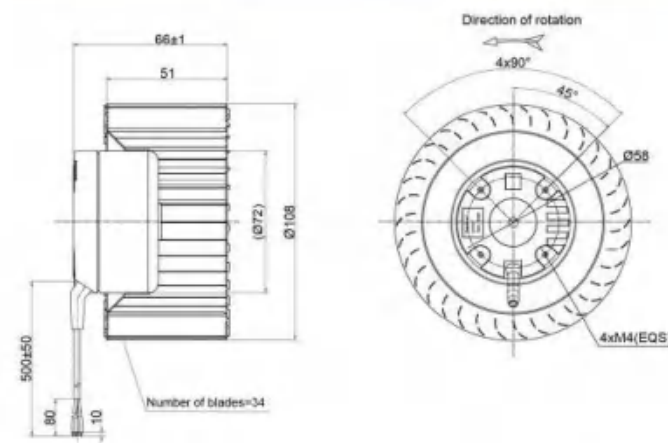


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dBA         |
| PF3N108B24H | BE72DC | BALL           | 24            | 16-28             | 2.0           | 48          | 2730        | 230               | 304          | 65          |
| PF3N108B48H | BE72DC | BALL           | 48            | 36-57             | 1.0           | 48          | 2730        | 230               | 304          | 65          |

## DC Centrifugal Fan Forward Curved Ø120x83mm

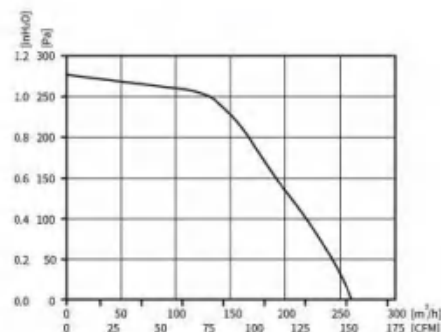


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.8KG  | D1          |

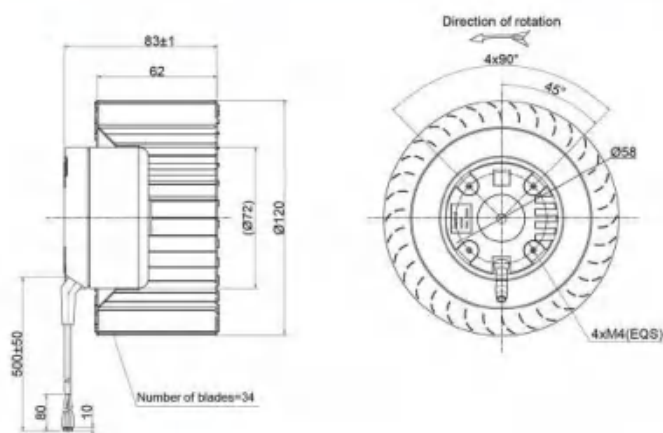


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N120B24M | BE72DC | BALL           | 24            | 16-28             | 2.0           | 40          | 2200        | 260      | 276          | 62          |
| PF3N120B48M | BE72DC | BALL           | 48            | 36-57             | 1.0           | 40          | 2290        | 260      | 276          | 62          |

## DC Centrifugal Fan Forward Curved Ø133x66mm

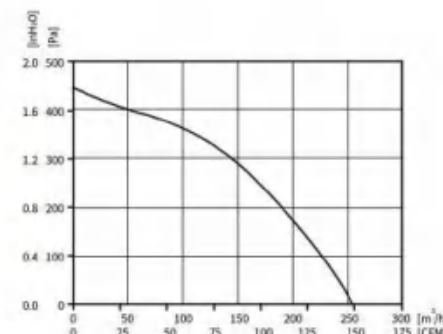


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.9KG  | D1          |

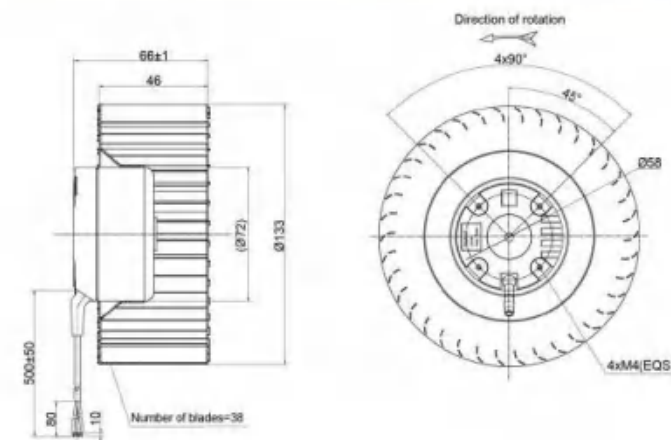


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N133B24M | BE72DC | BALL           | 24            | 16-28             | 2.4           | 57.6        | 2800        | 255      | 445          | 64          |
| PF3N133B48M | BE72DC | BALL           | 48            | 36-57             | 1.2           | 57.6        | 2800        | 255      | 445          | 64          |

## DC Centrifugal Fan Forward Curved Ø140x72mm

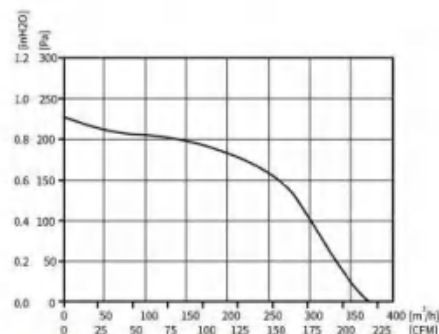


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.0KG  | D1          |

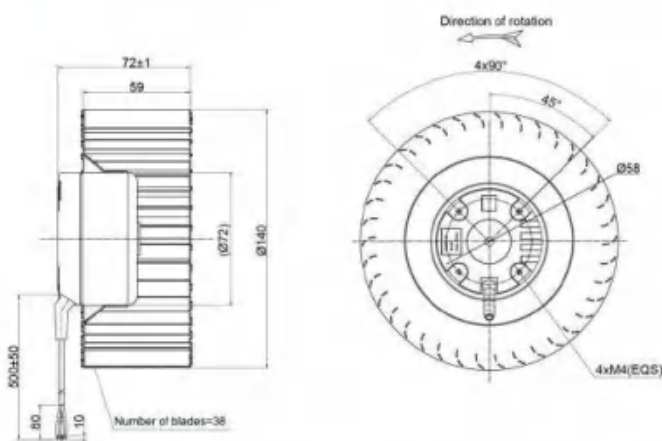


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PF3N140B24M | BE72DC | BALL           | 24            | 16-28             | 2.0           | 49          | 1410        | 370      | 227          | 63          |
| PF3N140B48M | BE72DC | BALL           | 48            | 36-57             | 1.0           | 49          | 1410        | 370      | 227          | 63          |

## DC Centrifugal Fan Forward Curved Ø146x72mm

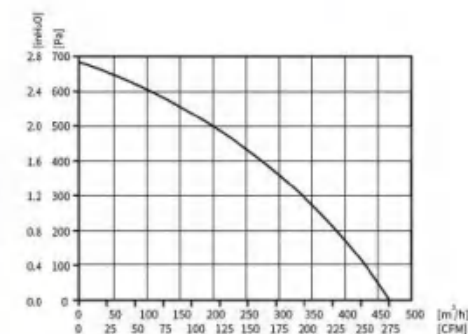


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.4KG  | D2          |

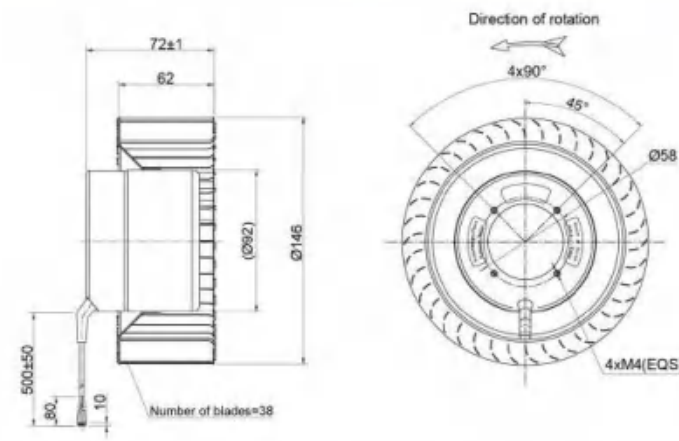


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PF3N146B24M | BE92DC | BALL           | 24            | 16-28             | 5.0           | 100         | 2200        | 470      | 684          | 68          |
| PF3N146B48M | BE92DC | BALL           | 48            | 36-57             | 2.5           | 100         | 2200        | 470      | 684          | 68          |

## DC Centrifugal Fan Forward Curved Ø160x72mm

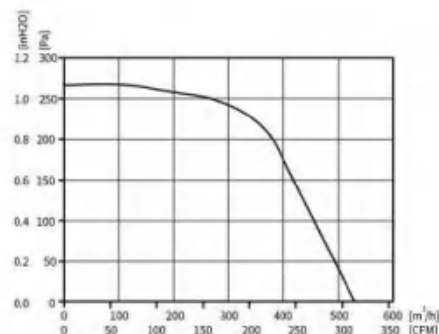


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.6KG  | D2          |

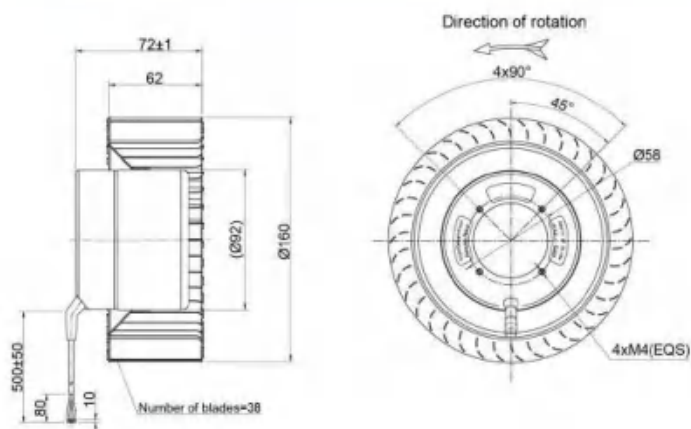


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N160B24M | BE92DC | BALL           | 24            | 16-28             | 3.9           | 94          | 1730        | 530      | 267          | 67          |
| PF3N160B48M | BE92DC | BALL           | 48            | 36-57             | 1.9           | 94          | 1730        | 530      | 267          | 67          |

## DC Centrifugal Fan Forward Curved Ø200x130mm

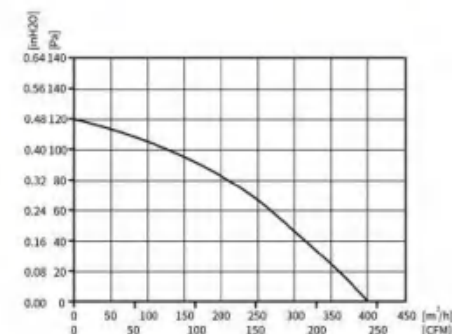


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.6KG  | D2          |

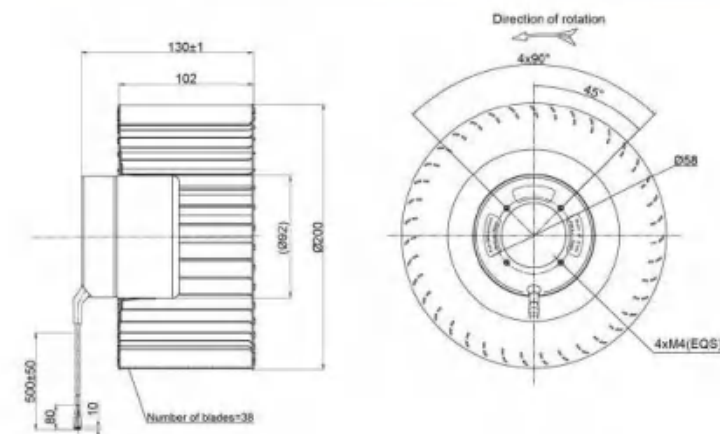


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N200B24X | BE92DC | BALL           | 24            | 16-28             | 2.2           | 52.8        | 1100        | 400      | 120          | 45          |
| PF3N200B48X | BE92DC | BALL           | 48            | 36-57             | 1.1           | 52.8        | 1100        | 400      | 120          | 45          |

## DC Blower Single Inlet Ø97mm

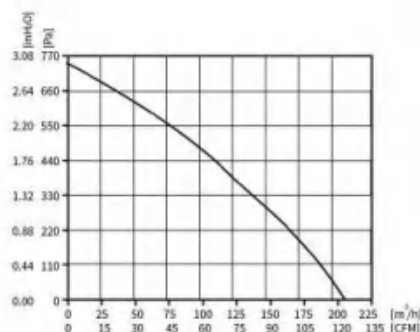


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~50VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.84KG | D1          |

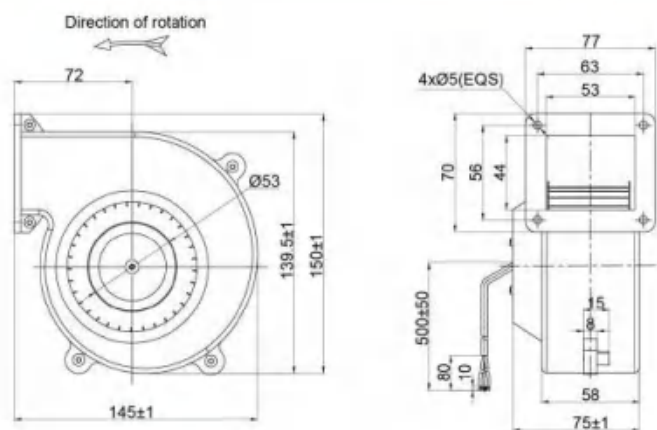


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PS3N007B24M | BE53DC | BALL           | 24            | 16~28             | 3.2           | 76.8        | 3650        | 210      | 740          | 67          |
| PS3N007B48M | BE53DC | BALL           | 48            | 36~57             | 1.6           | 76.8        | 3650        | 210      | 740          | 67          |

## DC Blower Single Inlet Ø100mm

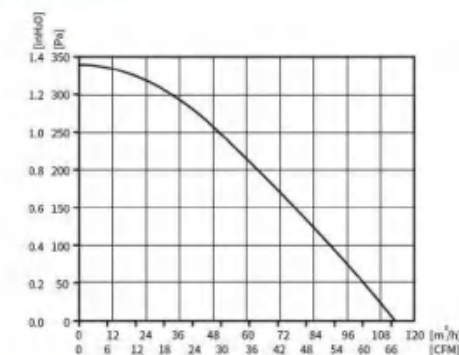


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 0.66KG | D1          |

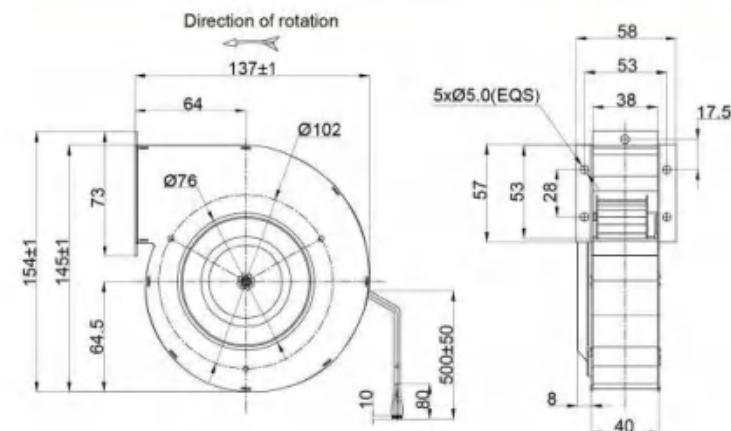


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PS3N100B24M | BE53DC | BALL           | 24            | 16~28             | 1             | 24          | 2800        | 113.4    | 338          | 56          |
| PS3N100B48M | BE53DC | BALL           | 48            | 36~57             | 0.5           | 24          | 2800        | 113.4    | 338          | 56          |

## DC Blower Single Inlet Ø120mm

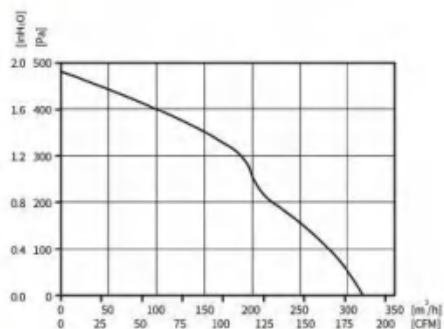


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.46KG | D1          |

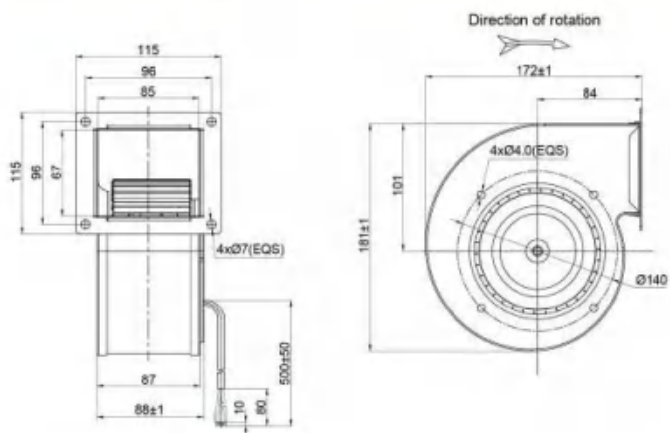


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N120B24M | BE72DC | BALL           | 24            | 16~28             | 3.0           | 72          | 2800        | 317      | 471          | 58          |
| PS3N120B48M | BE72DC | BALL           | 48            | 36~57             | 1.5           | 72          | 2800        | 317      | 471          | 58          |

## DC Blower Single Inlet Ø133mm

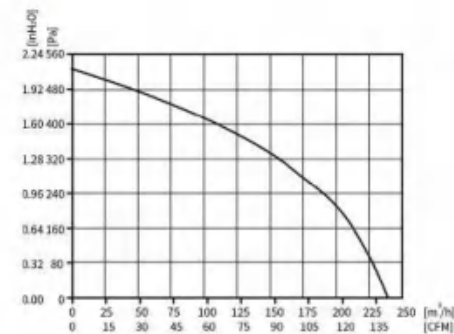


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.5KG  | D1          |

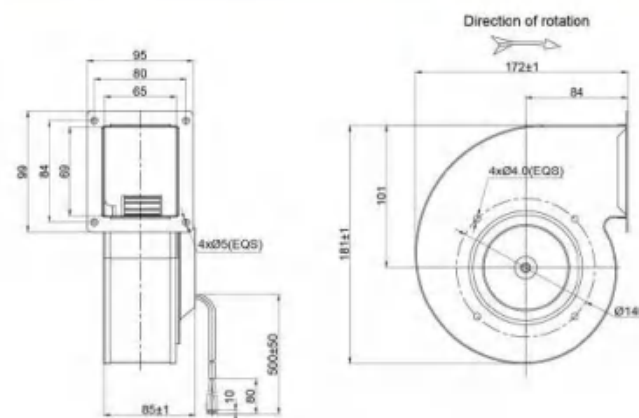


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N133B24M | BE72DC | BALL           | 24            | 16~28             | 2.5           | 60          | 2200        | 238      | 525          | 65          |
| PS3N133B48M | BE72DC | BALL           | 48            | 36~57             | 1.25          | 60          | 2200        | 238      | 525          | 65          |

## DC Blower Single Inlet Ø140mm

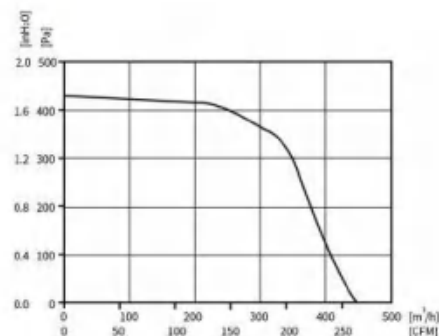


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.3KG  | D1          |

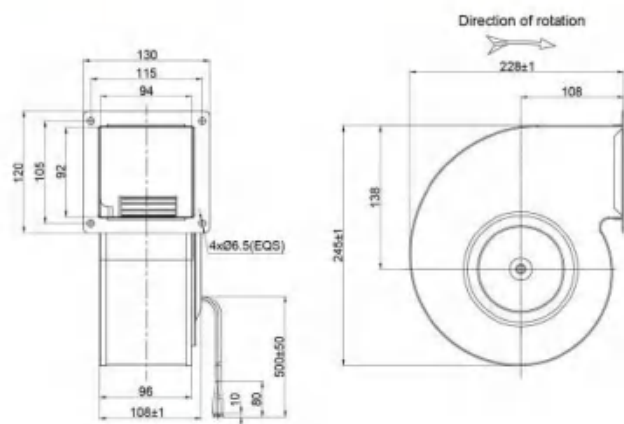


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N140B24M | BE72DC | BALL           | 24            | 16~28             | 3.3           | 80          | 1800        | 450      | 420          | 65          |
| PS3N140B48M | BE72DC | BALL           | 48            | 36~57             | 1.67          | 80          | 1800        | 450      | 420          | 65          |

## DC Blower Single Inlet Ø150mm

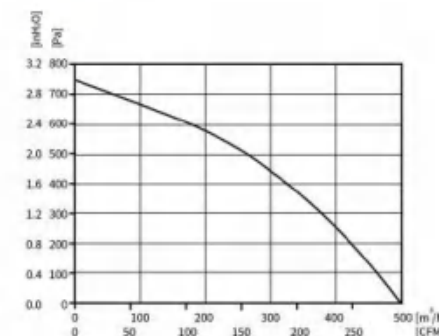


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.5KG  | D2          |

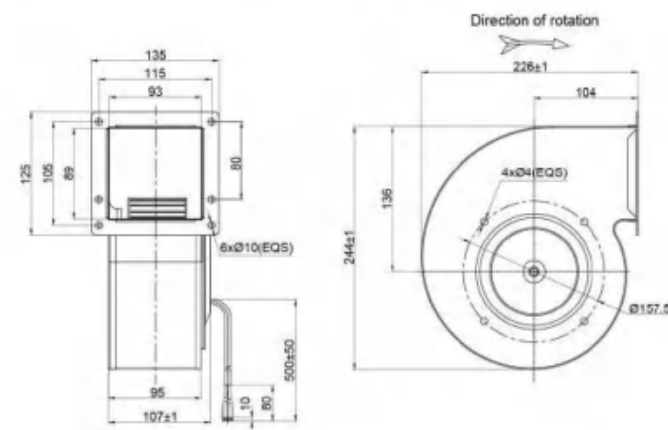


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N150B24M | BE92DC | BALL           | 24            | 16~28             | 4.6           | 105         | 2400        | 500      | 750          | 68          |
| PS3N150B48M | BE92DC | BALL           | 48            | 36~57             | 2.3           | 105         | 2400        | 500      | 750          | 68          |

## DC Blower Single Inlet Ø160mm

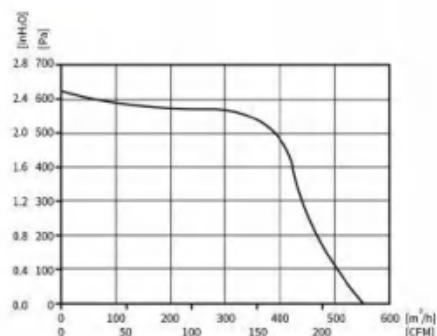


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.8KG  | D2          |

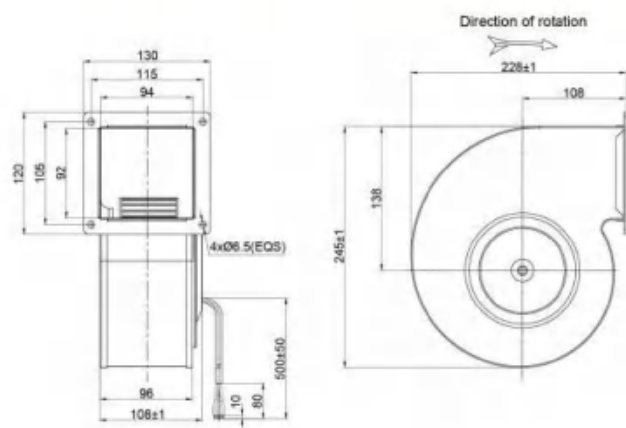


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N160B24M | BE92DC | BALL           | 24            | 16~28             | 4.4           | 105         | 1050        | 550      | 620          | 62          |
| PS3N160B48M | BE92DC | BALL           | 48            | 36~57             | 2.2           | 105         | 1950        | 550      | 620          | 62          |

## DC Blower Single Inlet Ø180mm

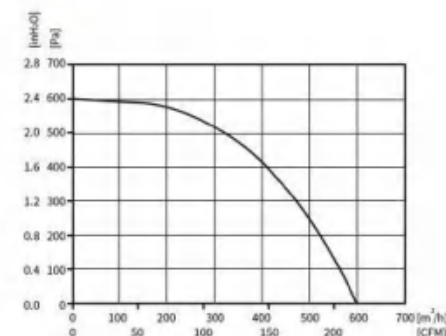


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL ROTOR MOTOR | 0~10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.6KG  | D2          |

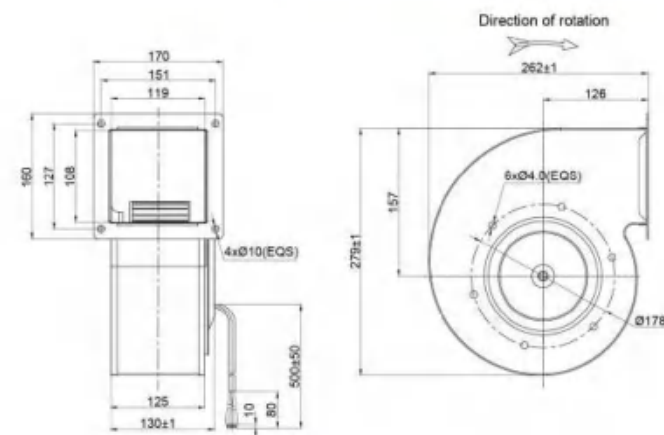


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N180B24M | BE92DC | BALL           | 24            | 16~28             | 3.8           | 90          | 1250        | 600      | 600          | 67          |
| PS3N180B48M | BE92DC | BALL           | 48            | 36~57             | 1.9           | 90          | 1250        | 600      | 600          | 67          |

## DC Blower Dual Inlet Ø133x190mm

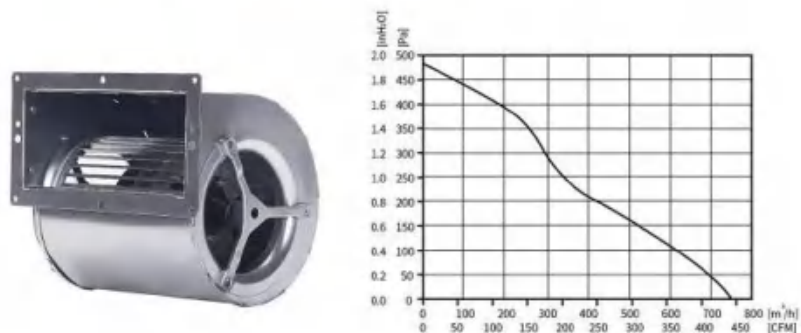


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3KG    | D2          |

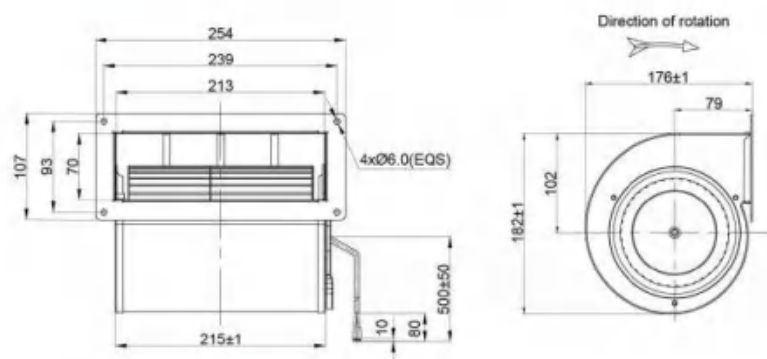


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N133B24U | BE92DC | BALL           | 24            | 16-28             | 6.4           | 153.6       | 1780        | 750      | 488          | 62          |
| PD3N133B48U | BE92DC | BALL           | 48            | 36-57             | 3.2           | 153.6       | 1780        | 750      | 488          | 62          |

## DC Blower Dual Inlet Ø146x190mm

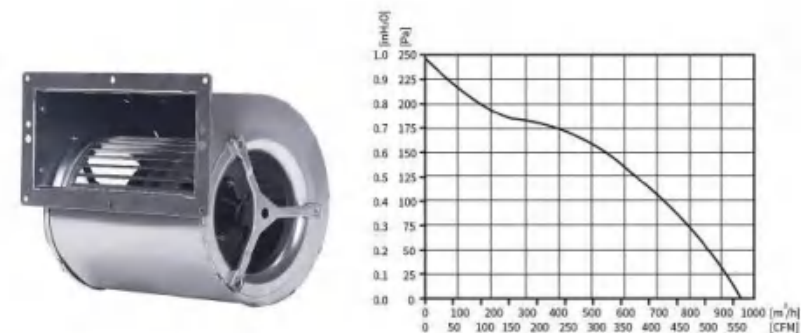


| Motor Type                  | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| DC BRUSHLESS EXTERNAL MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 4.5KG  | D2          |

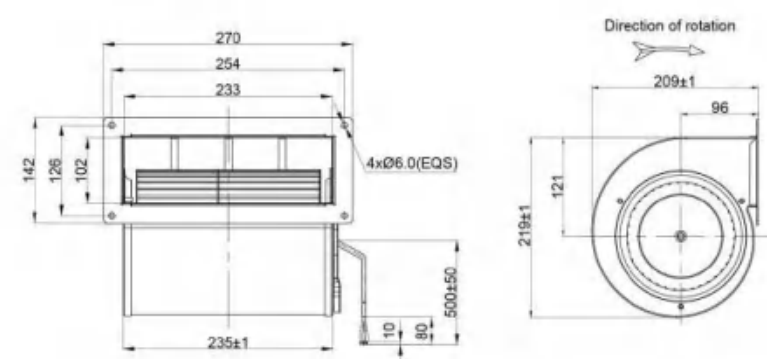


| Model       | Motor  | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-------------------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VDC           | VDC               | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N146B24H | BE92DC | BALL           | 24            | 16-28             | 6.0           | 144         | 1580        | 960      | 248          | 61          |
| PD3N146B48H | BE92DC | BALL           | 48            | 36-57             | 3.0           | 144         | 1580        | 960      | 248          | 61          |

## EC Axial Fan Ø200x80mm

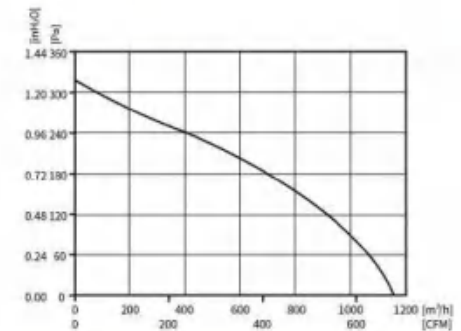

| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1.89KG | E1          |

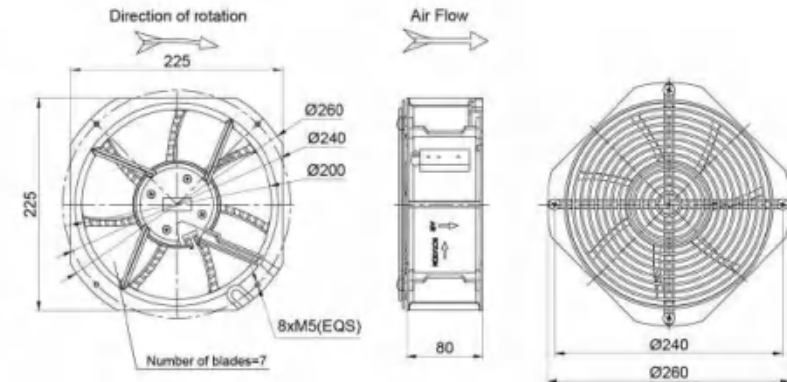


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | b/s            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Ta           | dB(A)       |
| PA3N200B2EH | BE72EC | BALL           | 230           | 50/60     | 0.6           | 70          | 3200        | 1160     | 320          | 68          |



## EC-AC Series



## EC Axial Fan Ø250x115mm

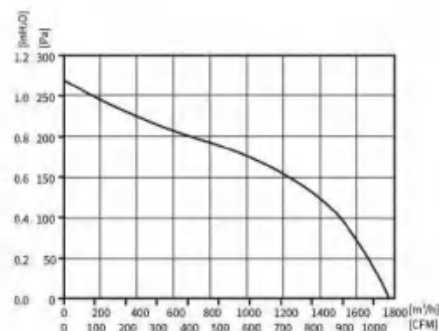


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.34KG | E2          |

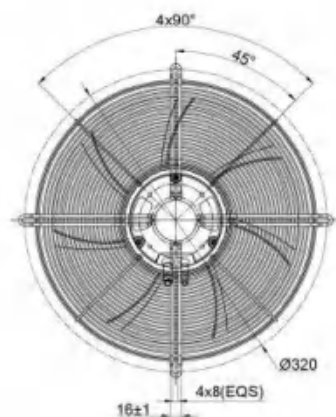
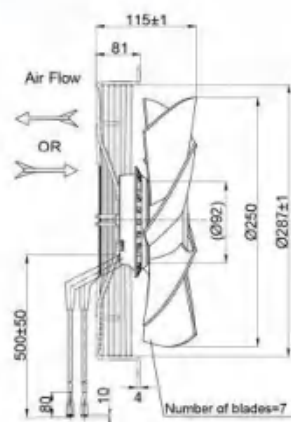


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow  | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-----------|--------------|-------------|
| PG3N250B2EM | BE92EC | BALL           | 230 VAC       | 50/60 Hz  | 1.25 A        | 180 W       | 3000 RPM    | 1722 m³/h | 268 Pa       | 75 dB(A)    |

## EC Axial Fan Ø250x80mm

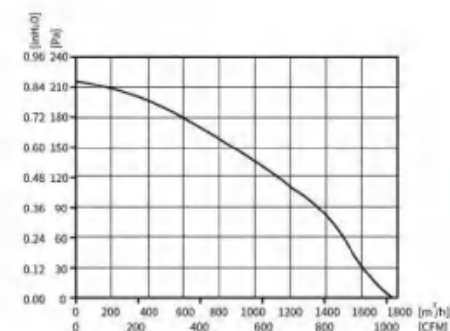


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.45KG | E2          |

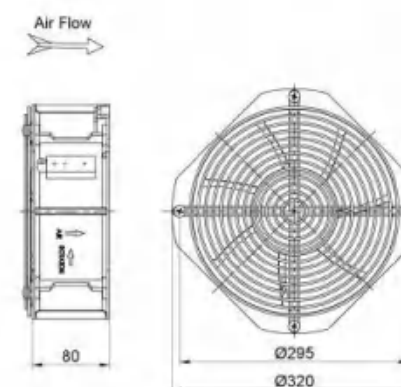
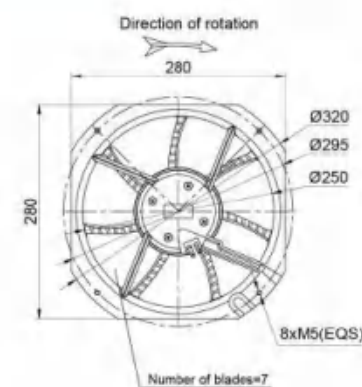


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow  | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-----------|--------------|-------------|
| PA3N250B2EH | BE92EC | BALL           | 230 VAC       | 50/60 Hz  | 0.7 A         | 80 W        | 2650 RPM    | 1760 m³/h | 215 Pa       | 64 dB(A)    |

## EC Axial Fan Ø300x125mm

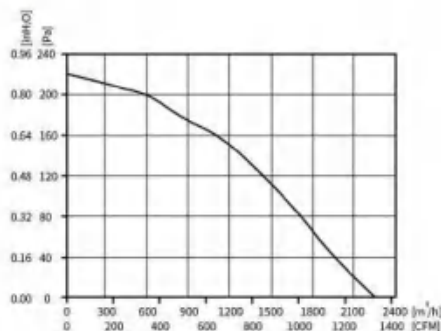


| Motor Type                        | Speed Control   | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|-----------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/0-10VAC | IP44            | B                | -25°C ~ +60°C         | 2.65KG | E2          |

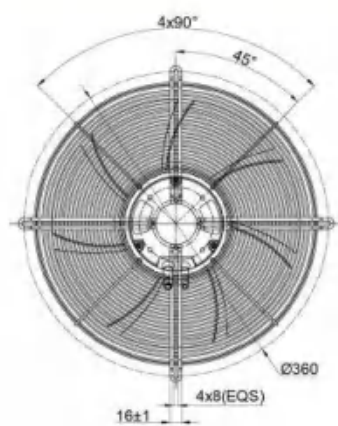
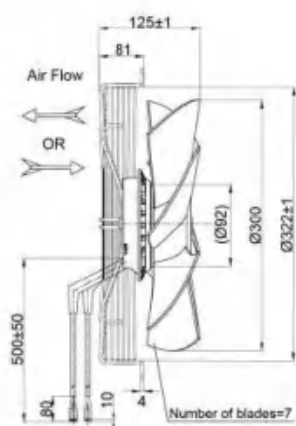


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PG3N300B2EM | BE92EC | BALL           | 230           | 50/60     | 0.7           | 95          | 2000        | 2267     | 214          | 71          |

## EC Axial Fan Ø300x90mm

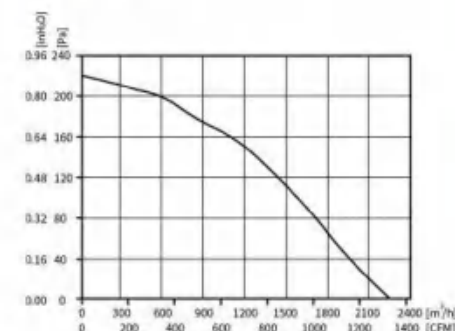


| Motor Type                        | Speed Control   | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|-----------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/0-10VAC | IP44            | B                | -25°C ~ +60°C         | 3.5KG  | E2          |

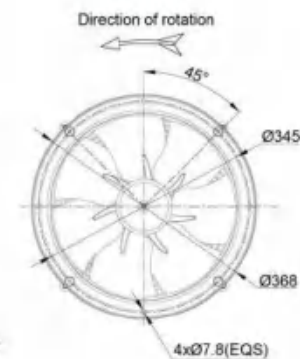
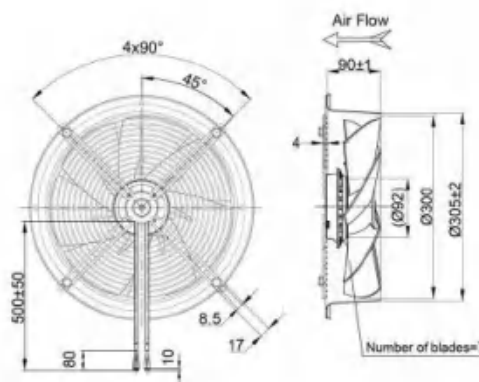


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PW3N300B2EH | BE92EC | BALL           | 230           | 50/60     | 0.7           | 95          | 2000        | 2267     | 214          | 71          |

## EC Axial Fan Ø350x100mm

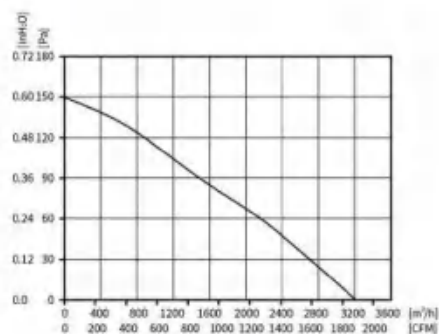


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-18VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 5.5KG  | E2          |

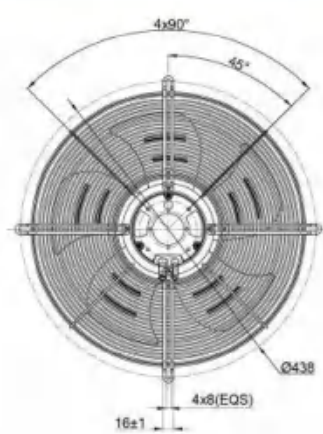
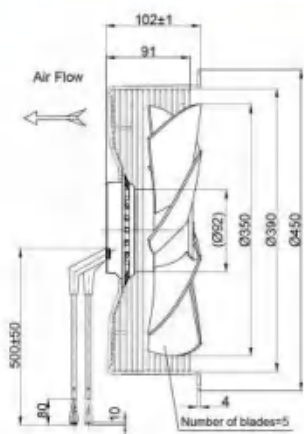


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N350B2EP | BE92EC | BALL           | 230           | 50/60     | 1.58          | 230         | 1580        | 3210     | 150          | 63          |

## EC Axial Fan Ø400x140mm

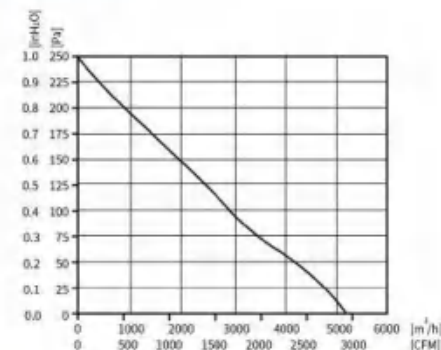


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-18VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 5.9KG  | E4          |

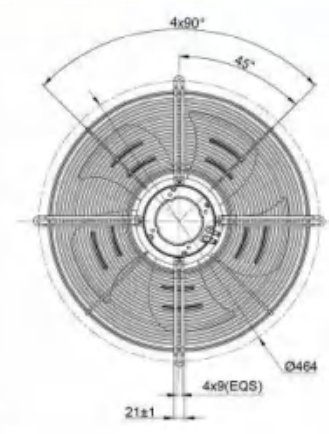
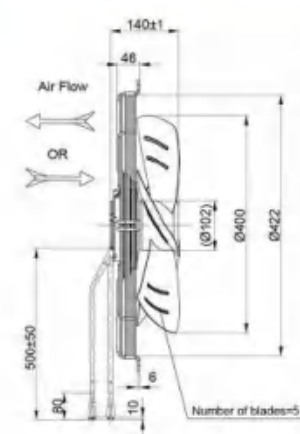


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N400B2EH | BE102EC | BALL           | 230           | 50/60     | 3.2           | 400         | 1700        | 5200     | 250          | 67          |

## EC Axial Fan Ø450x140mm

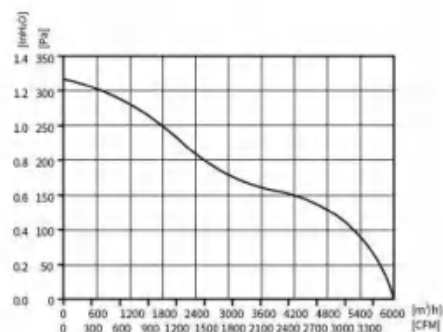


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-18VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 6.3KG  | E4          |

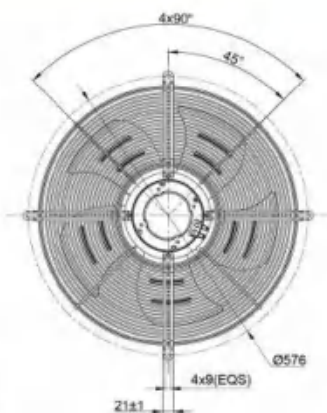
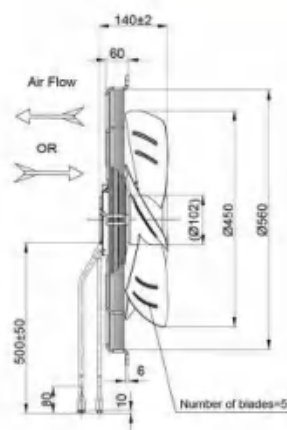


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PG3N450B2EM | BE102EC | BALL           | 230           | 50/60     | 2.7           | 400         | 1750        | 6001     | 316          | 76          |

## EC Axial Fan Ø450x142mm

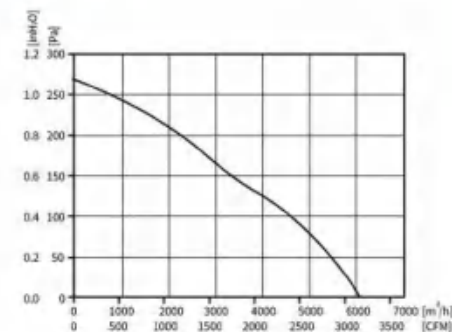


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-18VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 5.8KG  | E4          |

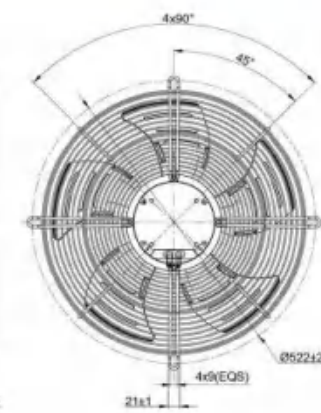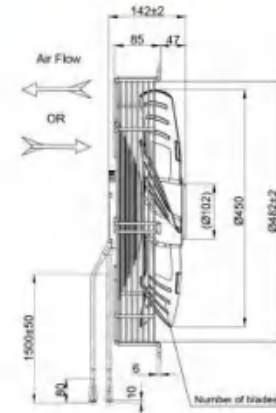


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA(A)      |
| PG3N450B2EP | BE102EC | BALL           | 230           | 50/60     | 1.8           | 400         | 1700        | 6080     | 270          | 70          |



## EC Axial Fan Ø550x182mm

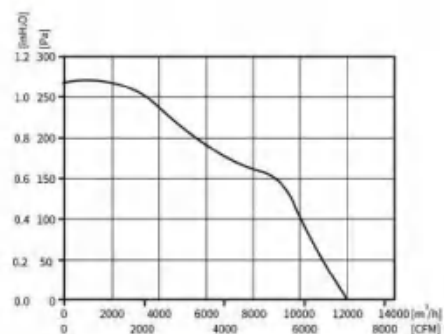


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 14.8KG | E6          |

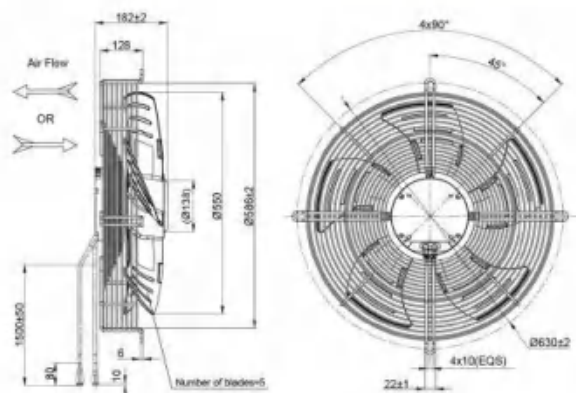


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N550B4EM | BE138EC | BALL           | 380           | 50/60     | 1.65          | 950         | 1690        | 12000    | 270          | 78          |

## EC Axial Fan Ø630x182mm

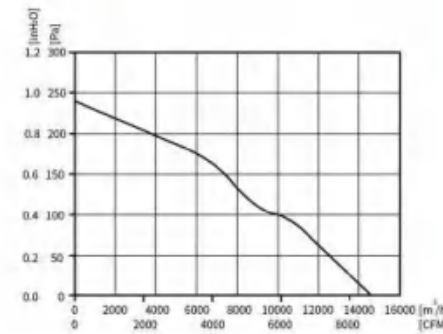


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 16.2KG | E6          |

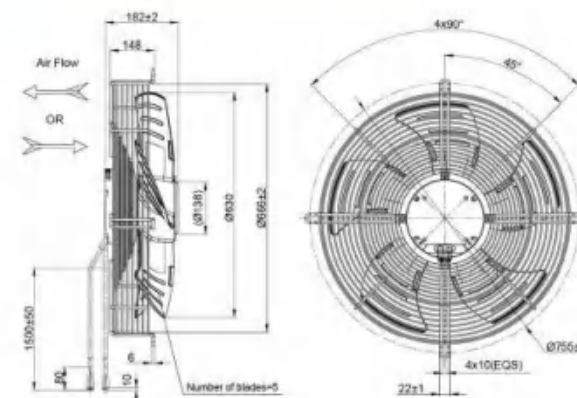


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PG3N630B4EM | BE138EC | BALL           | 380           | 50/60     | 1.3           | 800         | 1150        | 14500    | 240          | 69          |

## EC Centrifugal Fan Backward Curved Ø133x110mm

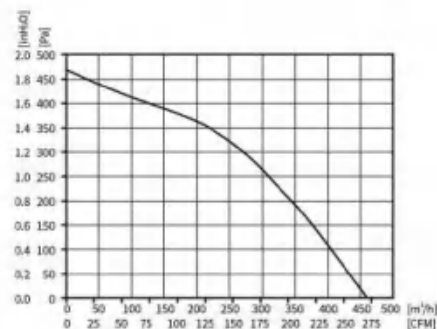


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1.06KG | E1          |

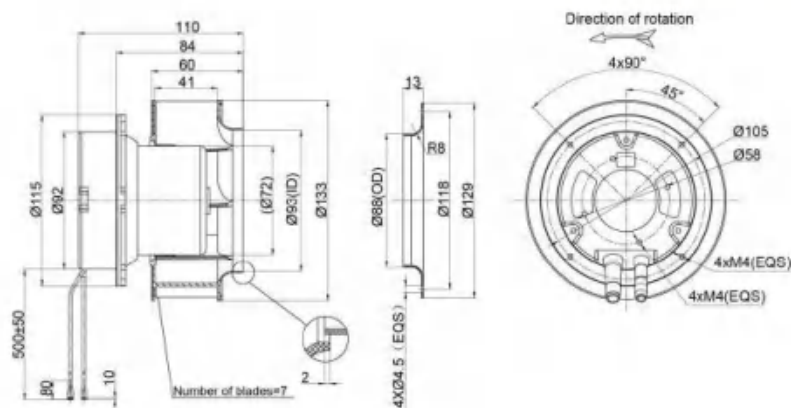


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N133B2EH | BE72EC | BALL           | 230           | 50/60     | 0.33          | 48          | 4480        | 460      | 475          | 75          |

## EC Centrifugal Fan Backward Curved Ø175x95mm

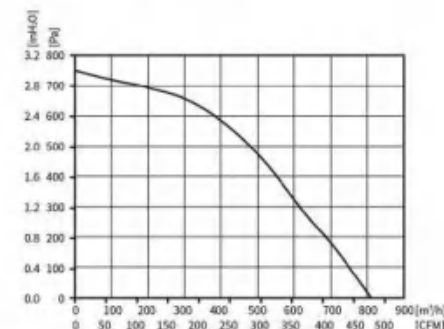


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1.35KG | E1          |


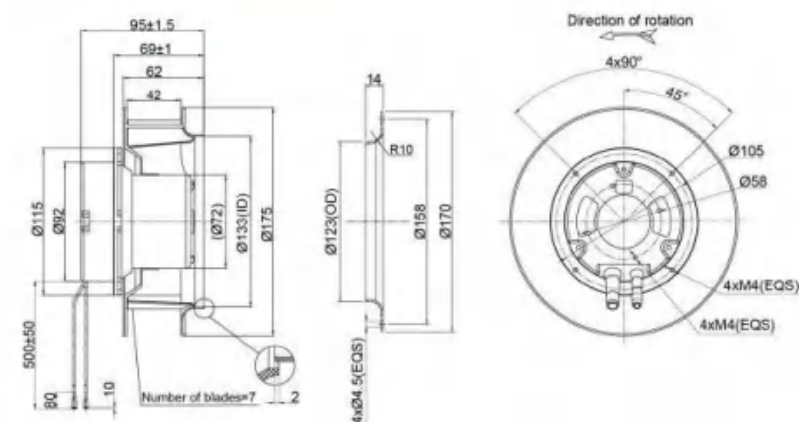


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N175B2EH | BE72EC | BALL           | 230           | 50/60     | 0.85          | 105         | 4460        | 810      | 744          | 76          |

## EC Centrifugal Fan backward Curved Ø190x95mm

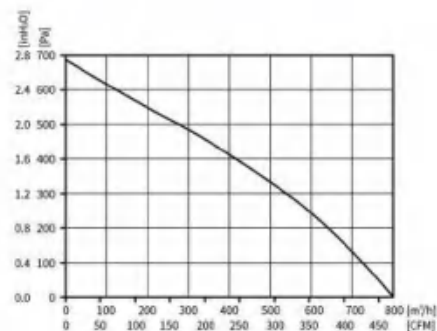


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1.45KG | E1          |


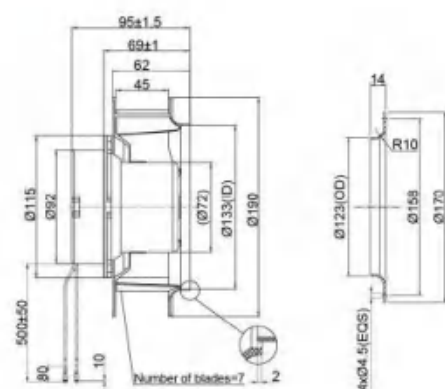


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N190B2EM | BE72EC | BALL           | 230           | 50/60     | 0.7           | 93          | 3570        | 795      | 686          | 72          |

## EC Centrifugal Fan backward Curved Ø190x95.5mm

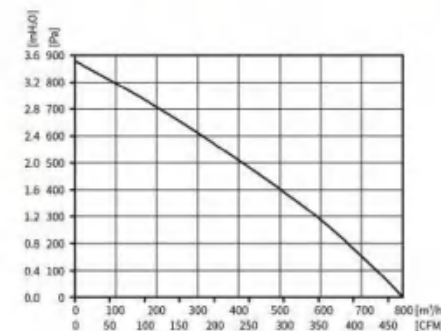


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10 VDC/PWM  | IP44            | B                | -25°C ~ +60°C         | 1.45KG | E2          |

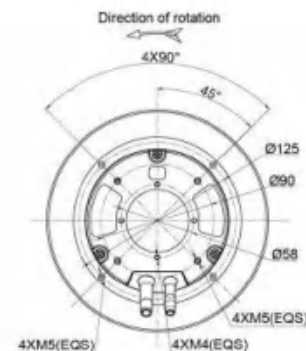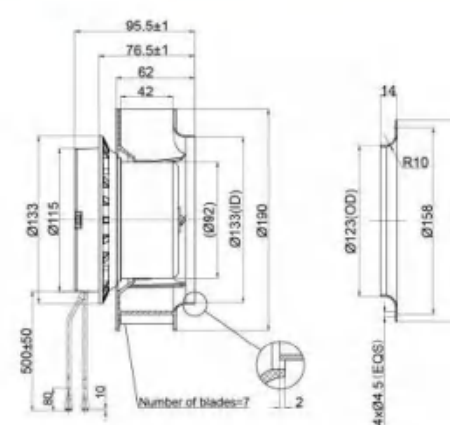


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N190B2EH | BE92EC | BALL           | 230           | 50/60     | 1             | 140         | 4000        | 800      | 882          | 74          |

EC Centrifugal Fan backward Curved Ø220x97mm

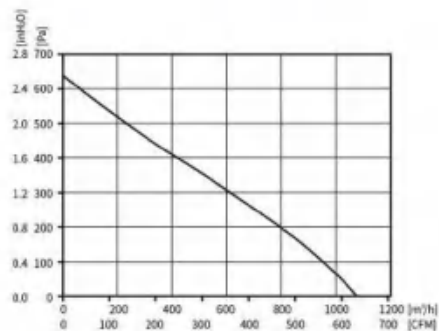


|                               |               |                 |                  |                       |        |             |
|-------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| Motor Type                    | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mark |
| IE3 BRUSH-LESS ELECTRIC MOTOR | 0-3.0VDC/7PWM | IP44            | B                | -25°C ~ +50°C         | 1.68KG | E1          |

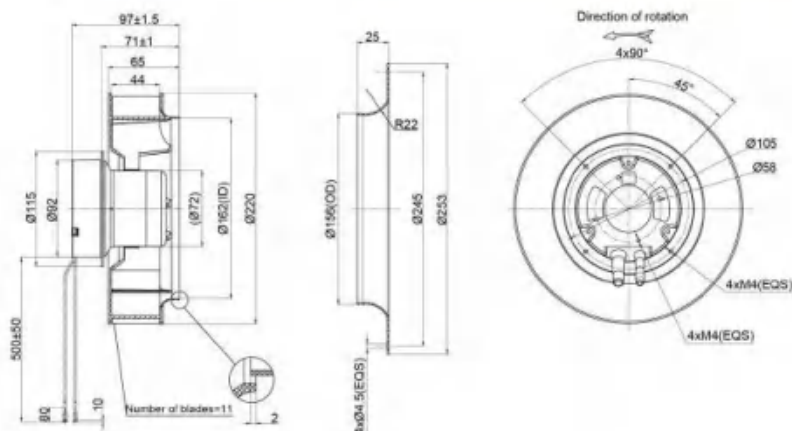


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | 1/2 S          | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pg           | dBA         |
| PB3N220B2EM | BE72EC | BALL           | 230           | 50/60     | 0.8           | 95          | 3060        | 1080              | 648          | 71          |

EC Centrifugal Fan backward Curved Ø220x93mm


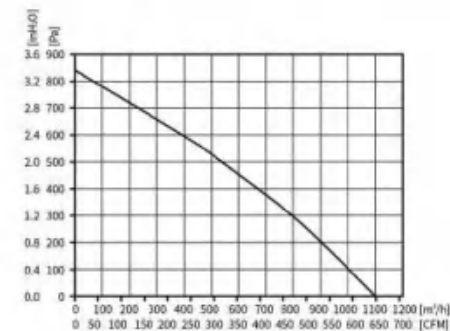


|                                     |                |                  |                   |                        |         |               |
|-------------------------------------|----------------|------------------|-------------------|------------------------|---------|---------------|
| Motor Type:                         | Speed Control: | Protection Type: | Insulation Class: | Operating Temperature: | Weight: | Winding Mode: |
| DC BRUSHLESS EXTERNAL MOTOR (MOTOR) | 0-10VDC/PWM    | IP44             | B                 | -25℃~+60℃              | 2.5KG   | E2            |

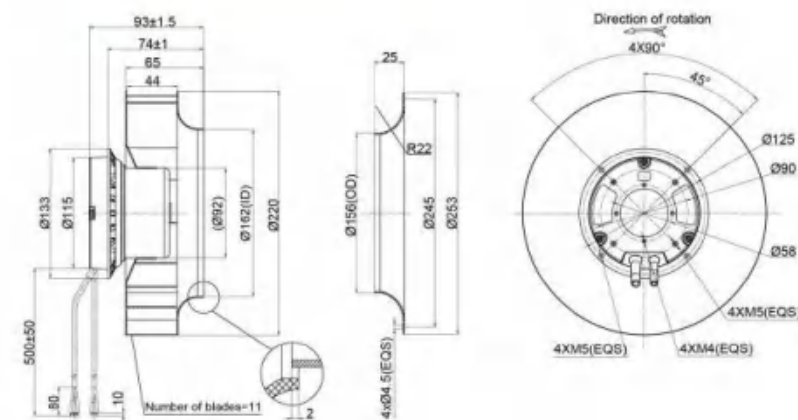


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dB(A)       |
| PB3N220B2EH | BE92EC | BALL           | 230           | 50/60     | 1.18          | 170         | 3600        | 1100              | 840          | 76          |

## EC Centrifugal Fan

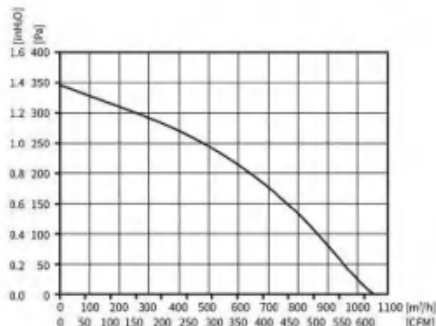


|                                   |               |                 |                  |                       |        |             |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mark |
| IE BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25℃ ~ +60℃           | 1.74KG | E1          |

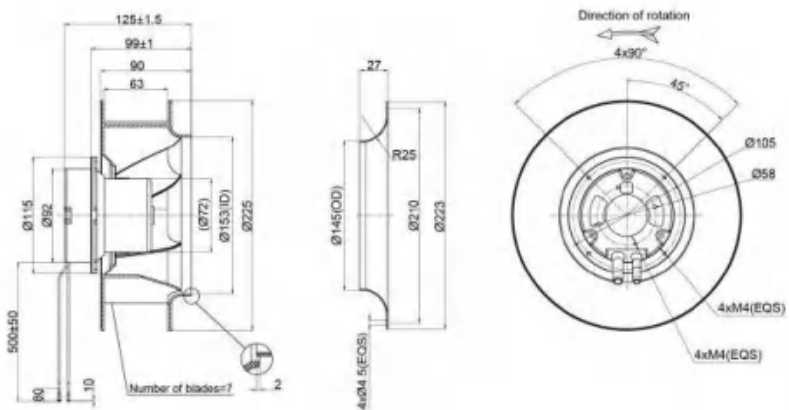


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pg           | dB(A)       |
| PB3N225B2EM | BE72EC | BALL           | 230           | 50/60     | 0.4           | 55          | 2200        | 1065              | 347          | 66          |

## EC Centrifugal Fan

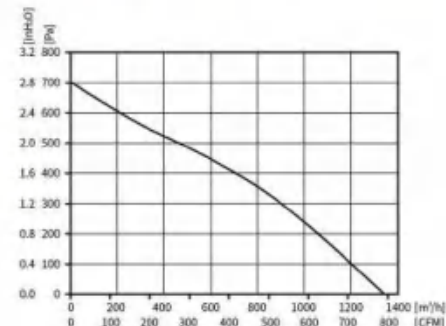


|                                                       |                               |                          |                        |                                       |                  |                    |
|-------------------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|------------------|--------------------|
| Motor Type:<br>EC BRUSHLESS EXTERNAL<br>MOTOR (M100H) | Speed Control:<br>0~10VDC/PWM | Protection Type:<br>IP44 | Insulation Class:<br>B | Operating Temperature:<br>-25°C~+60°C | Weight:<br>2.8KG | Wiring Mode:<br>E2 |
|-------------------------------------------------------|-------------------------------|--------------------------|------------------------|---------------------------------------|------------------|--------------------|

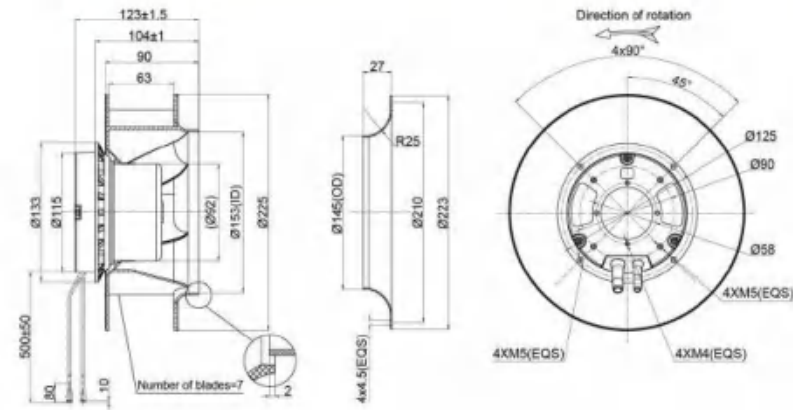


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | I/S            | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dBA         |
| PB3N225B2EH | BE92EC | BALL           | 230           | 50/60     | 1.04          | 135         | 3020        | 1340              | 705          | 71          |

## EC Centrifugal Fan backward Curved Ø250x111.5mm


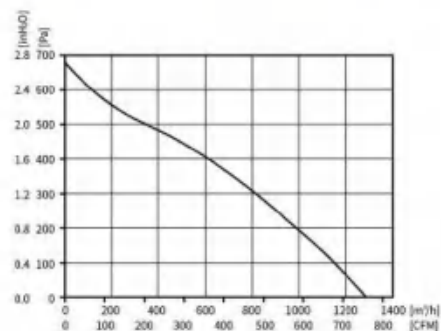


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.15KG | E2          |

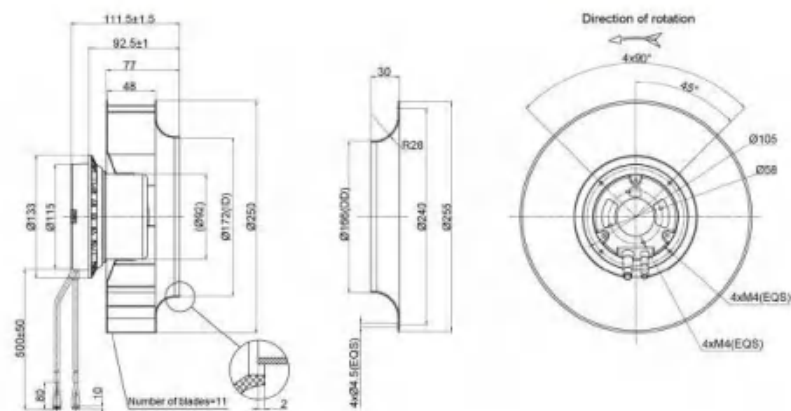


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N250B2EL | BE92EC | BALL           | 230           | 50/60     | 0.9           | 123         | 2760        | 1290     | 690          | 71          |

## EC Centrifugal Fan backward Curved Ø250x118mm

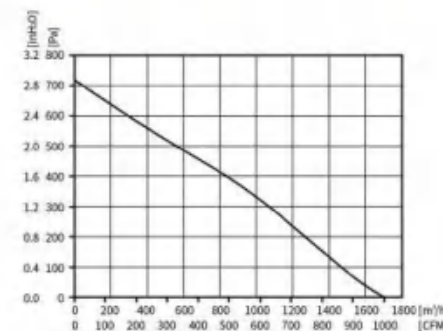

| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 2.77KG | E2          |

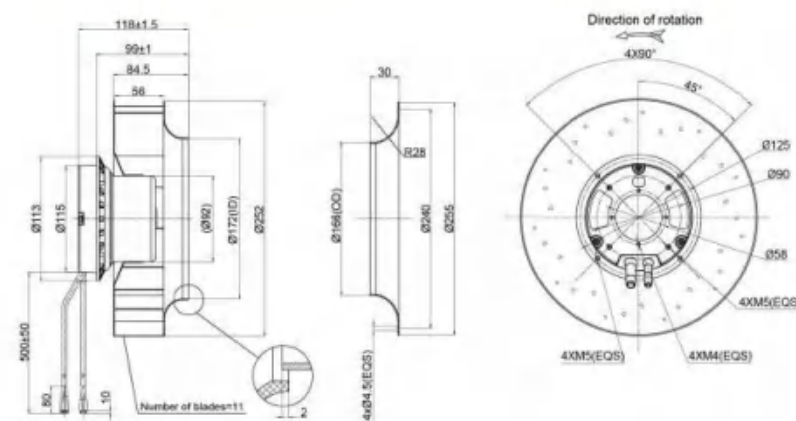

| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N250B2EM | BE92EC | BALL           | 230           | 50/60     | 1.13          | 155         | 2780        | 1700     | 716          | 75          |



**PBM**





**PBM**




**PBM**

## EC Centrifugal Fan backward Curved Ø280x144mm

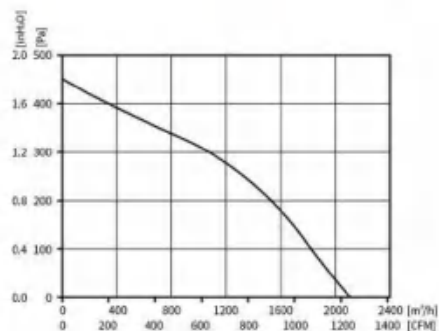



| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 3.05KG | E2          |

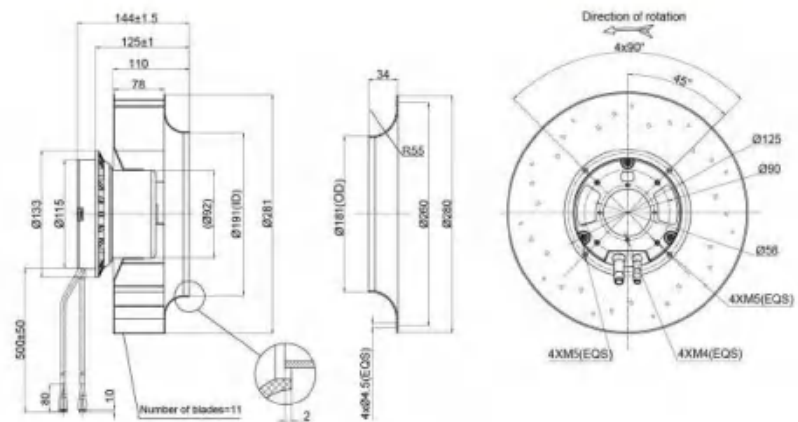


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N280B2EM | BE92EC | BALL           | 230           | 50/60     | 0.9           | 120         | 2000        | 2100     | 460          | 72          |

## EC Centrifugal Fan backward Curved Ø280x173mm

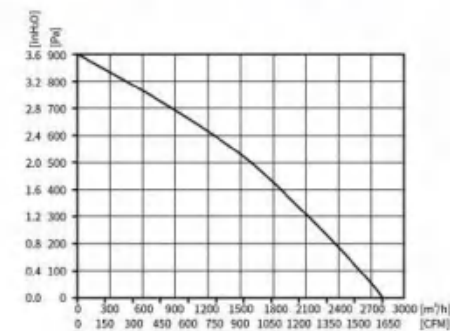


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 5.3KG  | E3          |

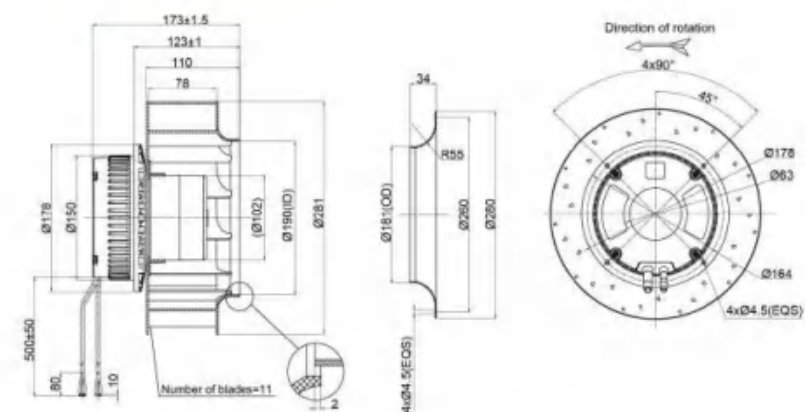


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N280B2EH | BE102EC | BALL           | 230           | 50/60     | 1.75          | 390         | 2760        | 2800     | 895          | 80          |

## EC Centrifugal Fan backward Curved Ø280x225mm

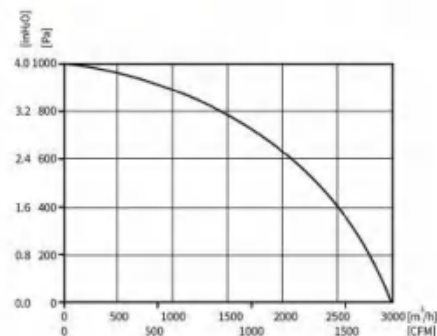


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 6.7KG  | E6          |

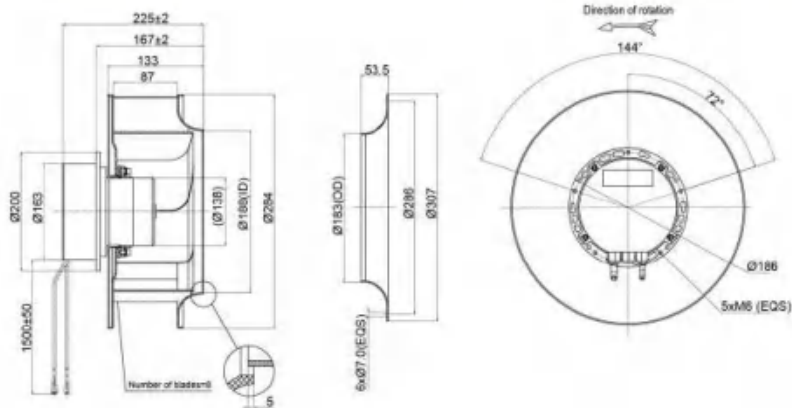


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N280B4EU | BE138EC | BALL           | 380           | 50/60     | 1.1           | 780         | 2850        | 2950     | 1000         | 82          |

## EC Centrifugal Fan backward Curved Ø310x139mm

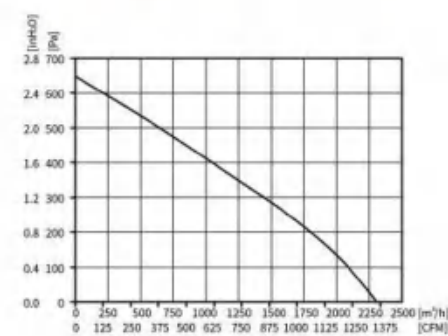


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 3.1KG  | E2          |

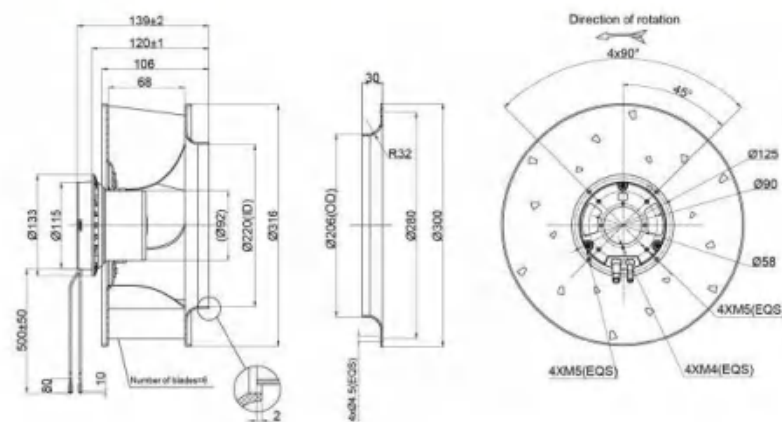


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N310B2EM | BE92EC | BALL           | 230           | 50/60     | 1.15          | 167         | 2050        | 2310     | 640          | 68          |

## EC Centrifugal Fan Backward Curved Ø310x170mm

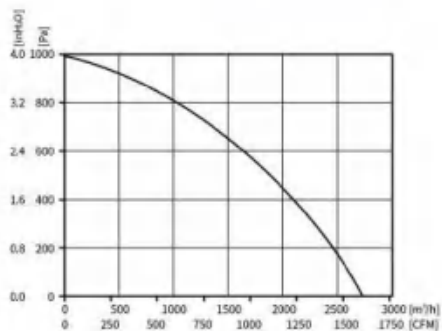


|                                        |               |                 |                  |                       |        |             |
|----------------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| Motor Type                             | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mark |
| IE BRUSHLESS PERMANENT<br>MAGNET MOTOR | 0-100% PWM    | IP44            | B                | -25℃ ~ +60℃           | 4.4KG  | E3          |

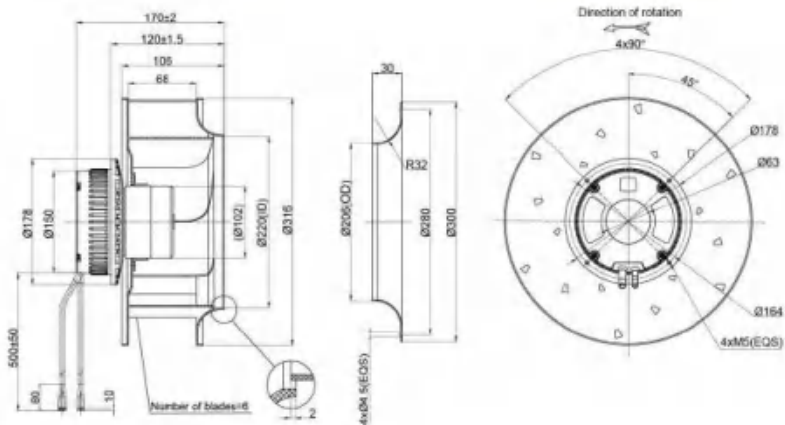


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pg           | dB(A)       |
| PB3N310B2EU | BE102EC | BALL           | 230           | 50/60     | 1.8           | 420         | 2680        | 2740              | 992          | 78          |

EC Centrifugal Fan backward Curved Ø310x173mm

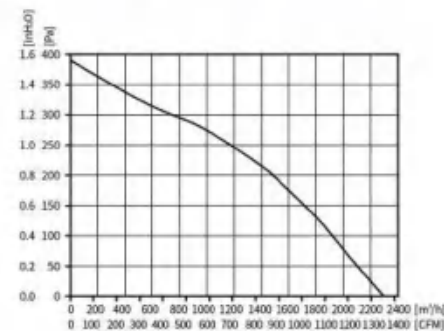

|                                                          |                               |                          |                        |                                     |                  |                    |
|----------------------------------------------------------|-------------------------------|--------------------------|------------------------|-------------------------------------|------------------|--------------------|
| Motor Type:<br>EC BRUSHLESS EXTERNAL<br>ROTOR MOTOR(DIE) | Speed Control:<br>0-30VDC/PWM | Protection Type:<br>IP44 | Insulation Class:<br>B | Operating Temperature:<br>-25℃~+60℃ | Weight:<br>3.2KG | Wiring Mode:<br>E2 |
|----------------------------------------------------------|-------------------------------|--------------------------|------------------------|-------------------------------------|------------------|--------------------|

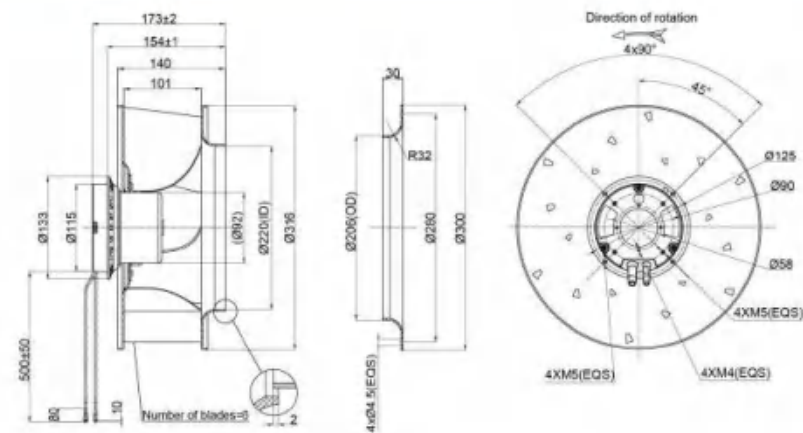

| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow          | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|-------------------|--------------|-------------|
| Part No.    | Type   | I/S            | VAC           | Hz        | A             | W           | RPM         | M <sup>3</sup> /H | Pa           | dB(A)       |
| PB3N310B2EL | BE92EC | BALL           | 230           | 50/60     | 0.95          | 135         | 1630        | 2300              | 394          | 54          |



**PBM**




**PBM**





**PBM**

## EC Centrifugal Fan backward Curved Ø355x209mm

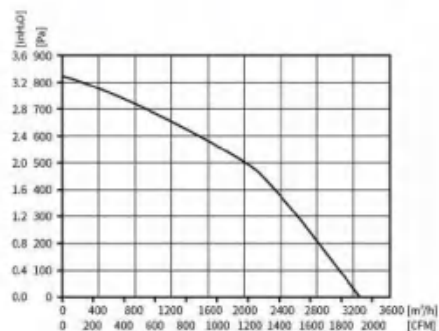


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.2KG  | E3          |

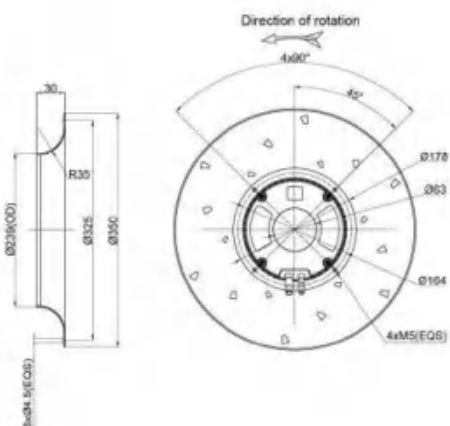
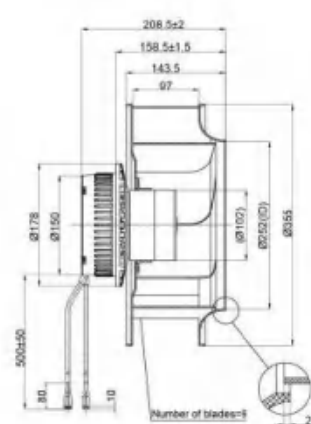


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PB3N355B2EH | BE102EC | BALL           | 230           | 50/60     | 1.6           | 357         | 2050        | 3270     | 820          | 76          |

## EC Centrifugal Fan backward Curved Ø355x233mm


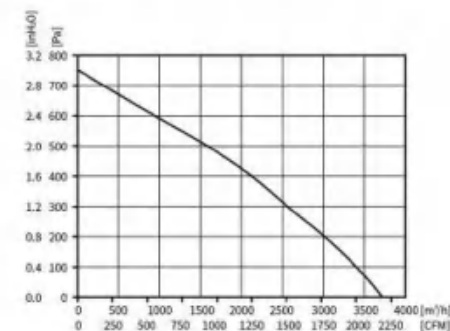


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 5.7KG  | E3          |


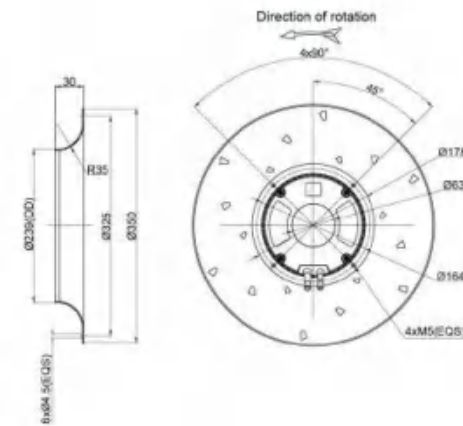
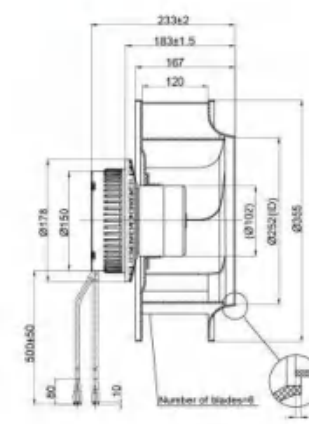


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dBA         |
| PB3N355B2EL | BE102EC | BALL           | 230           | 50/60     | 2.02          | 467         | 1930        | 3720     | 740          | 73          |

## EC Centrifugal Fan backward Curved Ø355x277mm

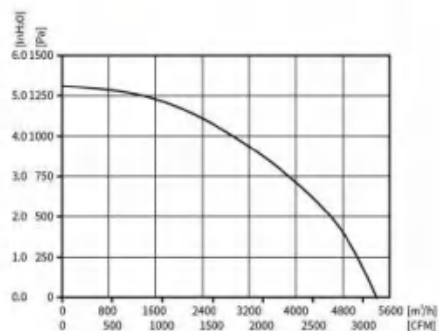


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 6.8KG  | E7          |


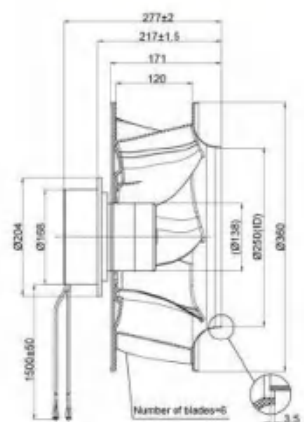


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N355B4EM | BE138EC | BALL           | 380           | 50/60     | 2.8           | 1500        | 2500        | 5400     | 1300         | 89          |

## EC Centrifugal Fan backward Curved Ø400x207mm

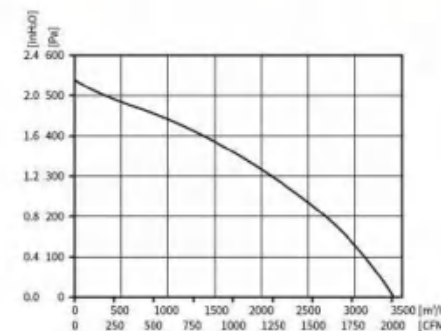


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 6.1KG  | E3          |


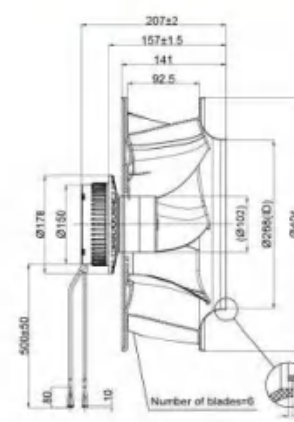


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N400B2EM | BE102EC | BALL           | 230           | 50/60     | 1.3           | 280         | 1500        | 3410     | 545          | 72          |

## EC Centrifugal Fan backward Curved Ø400x230mm

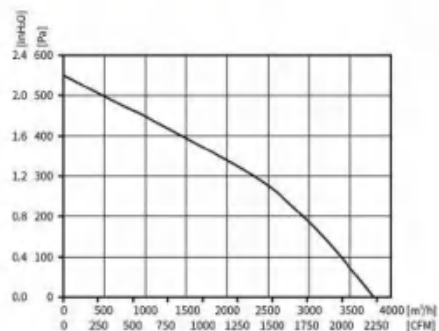


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 7.4KG  | E3          |


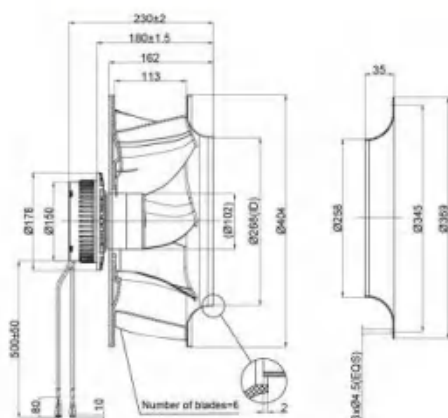


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N400B2EX | BE102EC | BALL           | 230           | 50/60     | 1.3           | 300         | 1360        | 3800     | 560          | 72          |

## EC Centrifugal Fan backward Curved Ø400x277mm

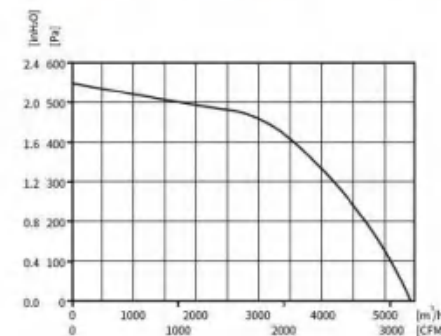


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 6.4KG  | E6          |

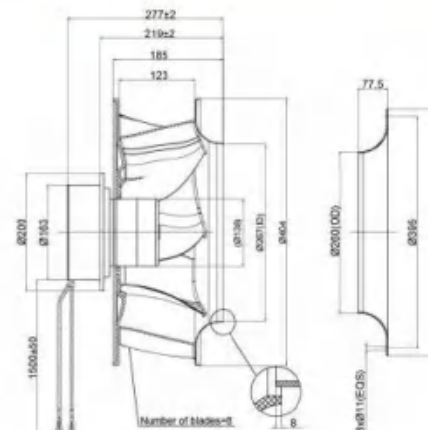


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N400B4EL | BE138EC | BALL           | 380           | 50/60     | 1.2           | 720         | 1580        | 5400     | 530          | 73          |

## EC Centrifugal Fan backward Curved Ø450x301mm

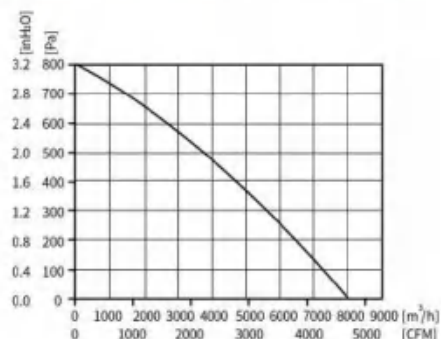


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 6.6KG  | E5          |

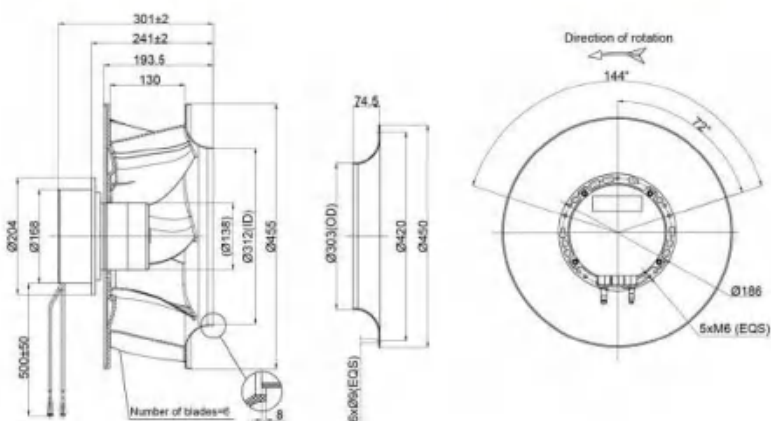


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N450B2EL | BE138EC | BALL           | 230           | 50/60     | 4.3           | 1030        | 1700        | 8050     | 800          | 76          |

## EC Centrifugal Fan backward Curved Ø450x308.5mm

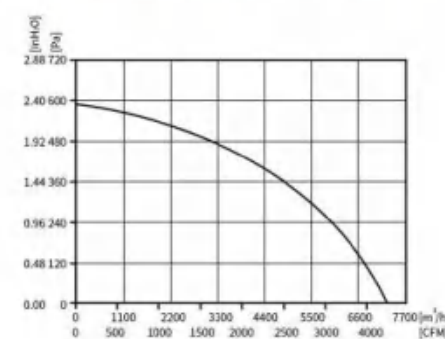


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 7.7KG  | E5          |

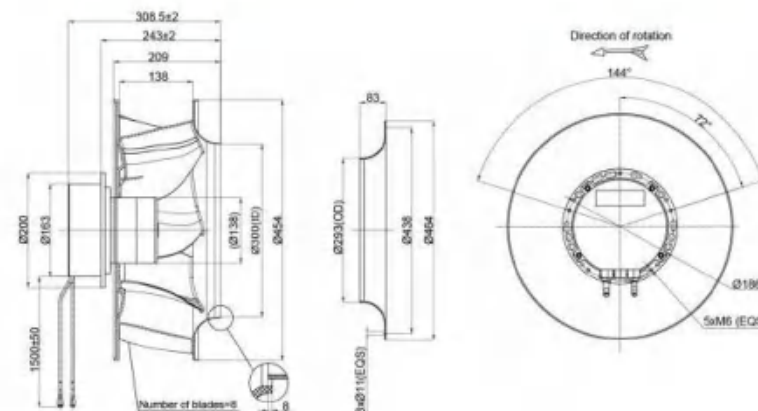


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N450B2EH | BE138EC | BALL           | 230           | 50/60     | 3.3           | 700         | 1450        | 7100     | 580          | 84          |

## EC Centrifugal Fan backward Curved Ø500x328mm

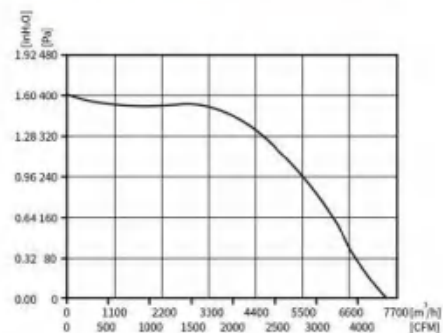


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 8.2KG  | E5          |

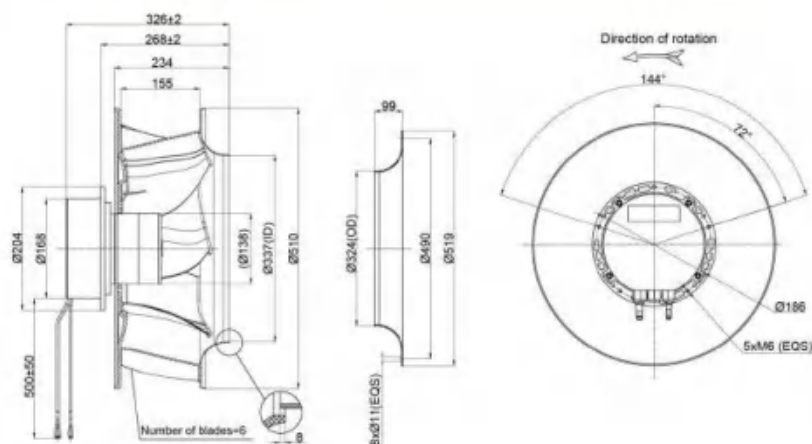


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N500B2EL | BE138EC | BALL           | 230           | 50/60     | 3.2           | 1125        | 710         | 7400     | 400          | 66          |

## EC Centrifugal Fan backward Curved Ø500x326mm


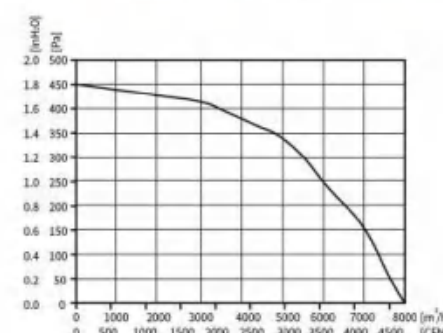


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 9.1KG  | E6          |

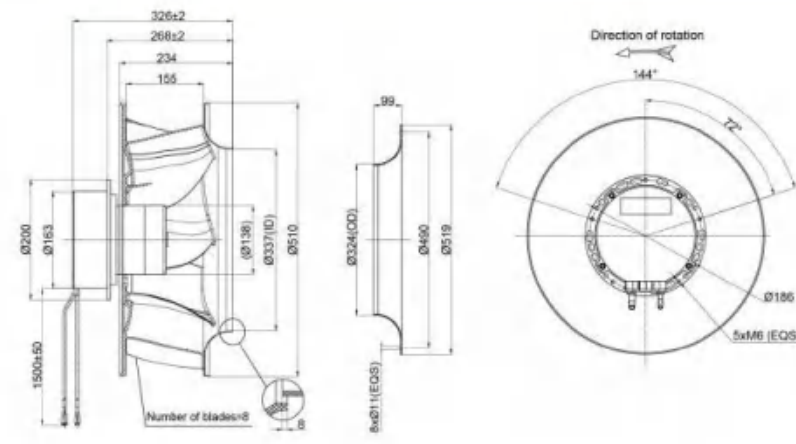


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N500B4EM | BE138EC | BALL           | 380           | 50/60     | 1.46          | 870         | 1100        | 8000     | 450          | 71          |

## EC Centrifugal Fan backward Curved Ø560x354mm

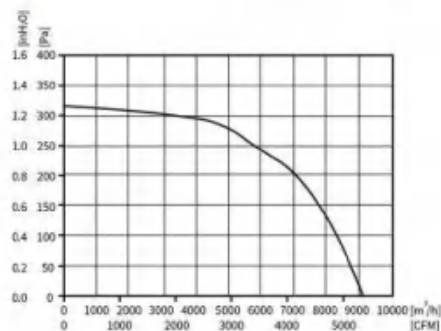


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 11.1KG | E6          |

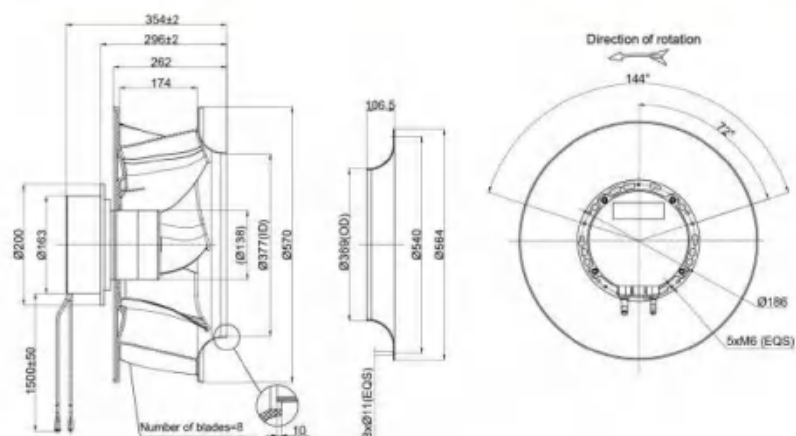


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | I/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N560B4EM | BE138EC | BALL           | 380           | 50/60     | 1.3           | 770         | 850         | 9100     | 320          | 69          |

## EC Centrifugal Fan backward Curved Ø630x376mm

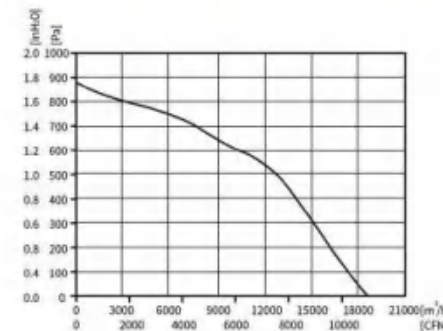


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 11.6KG | E6          |

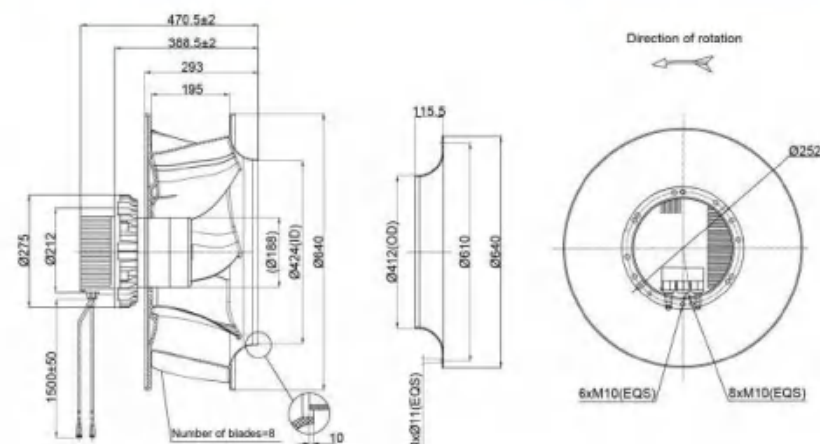


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | I/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PB3N630B4EM | BE188EC | BALL           | 380           | 50/60     | 4.4           | 2700        | 1250        | 18500    | 890          | 85          |

## EC Centrifugal Fan Forward Curved Ø108x94mm

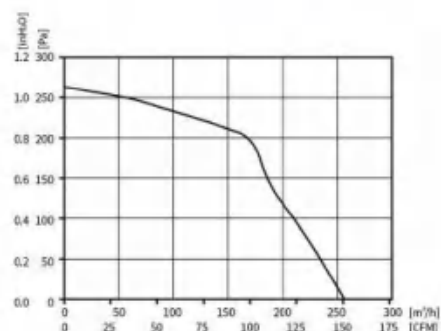


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1KG    | E1          |

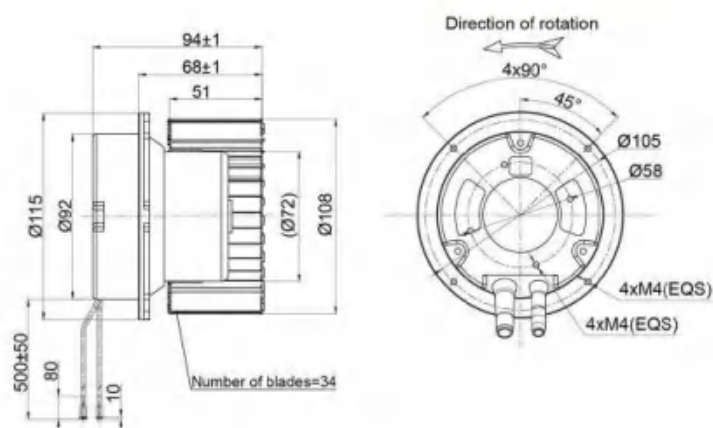


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | 6/5            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N108B2EM | BE72EC | BALL           | 230           | 50/60     | 0.43          | 48          | 2550        | 256      | 261          | 64          |

## EC Centrifugal Fan Forward Curved Ø120x98mm

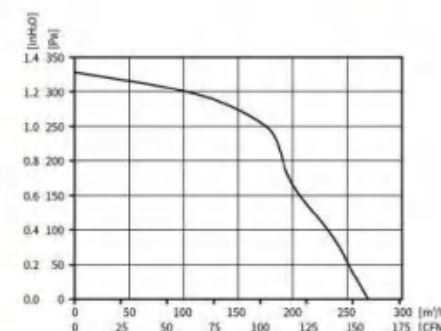


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 1.1KG  | E1          |


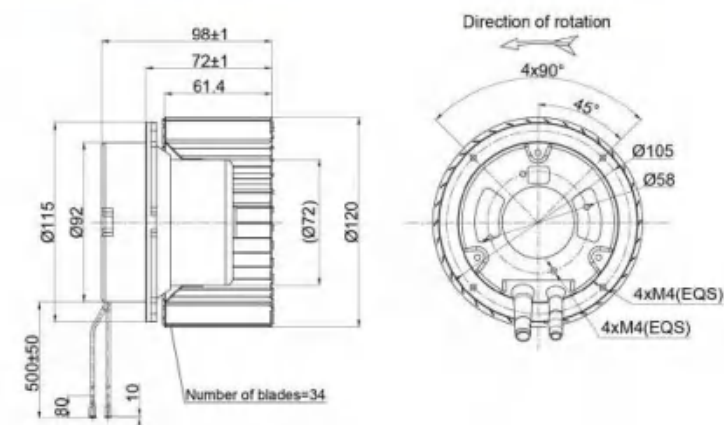


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | 6/5            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N120B2EH | BE72AC | BALL           | 230           | 50/60     | 0.53          | 61          | 2488        | 270      | 330          | 65          |

## EC Centrifugal Fan Forward Curved Ø133x81mm

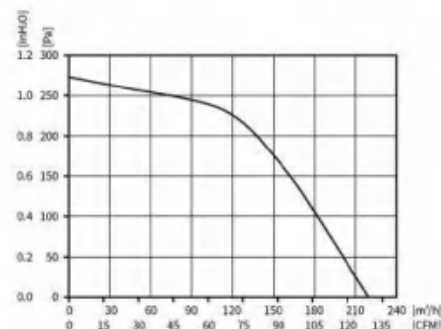


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.2KG  | E1          |


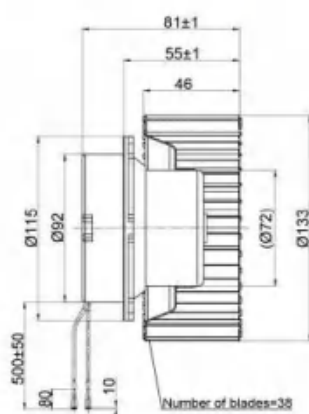


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N133B2EM | BE72EC | BALL           | 230           | 50/60     | 0.3           | 38          | 1920        | 220      | 275          | 63          |

## EC Centrifugal Fan Forward Curved Ø140x98mm

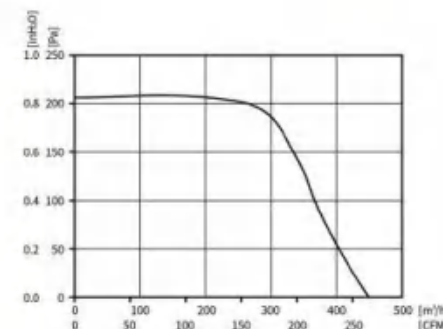


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.3KG  | E1          |


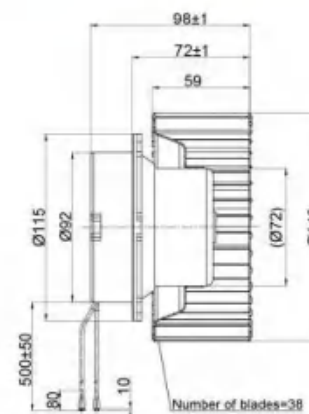


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N140B2EH | BE72EC | BALL           | 230           | 50/60     | 0.55          | 64          | 1685        | 450      | 208          | 63          |

## EC Centrifugal Fan Forward Curved Ø146x103.5mm

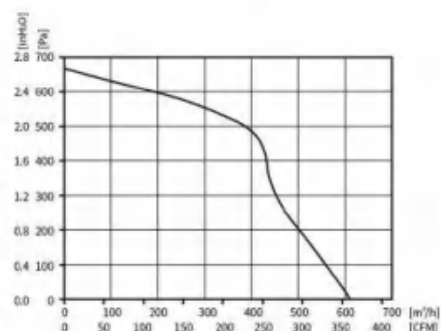


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 2KG    | E2          |


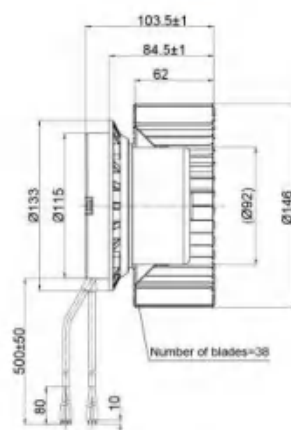


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | 6/5            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N146B2EH | BE92EC | BALL           | 230           | 50/60     | 1.3           | 175         | 2520        | 610      | 666          | 71          |

## EC Centrifugal Fan Forward Curved Ø160x100.5mm

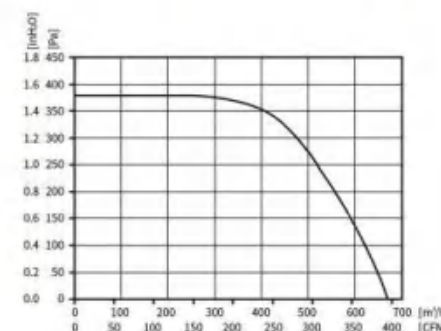


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 2.3KG  | E2          |

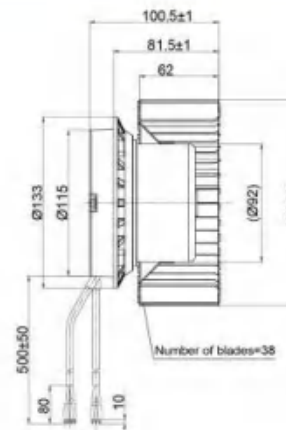


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | 6/5            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N160B2EH | BE92EC | BALL           | 230           | 50/60     | 1.28          | 177         | 2160        | 670      | 378          | 70          |

## EC Centrifugal Fan Forward Curved Ø180x129mm

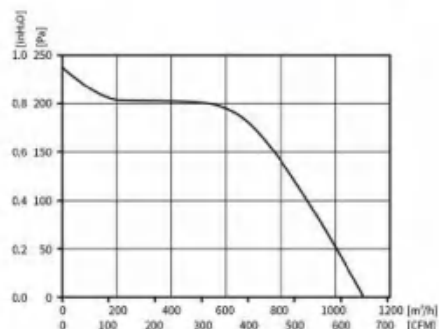


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 2.5KG  | E2          |

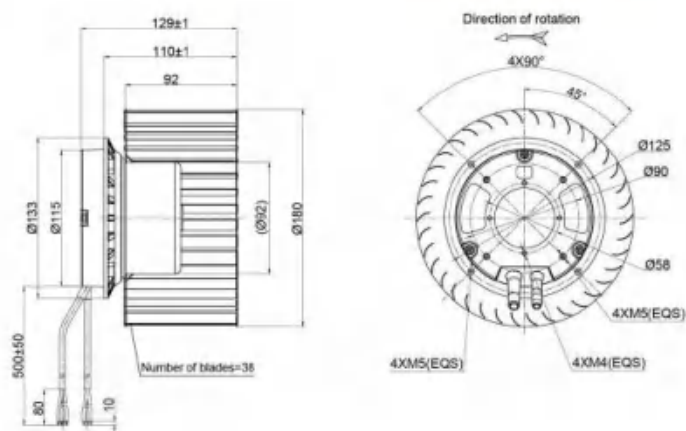


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N180B2EM | BE92EC | BALL           | 230           | 50/60     | 1.2           | 168         | 2250        | 1100     | 237          | 60          |

## EC Centrifugal Fan Forward Curved Ø200x175mm

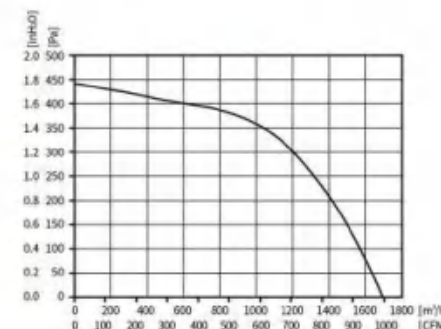


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 7.4KG  | E3          |

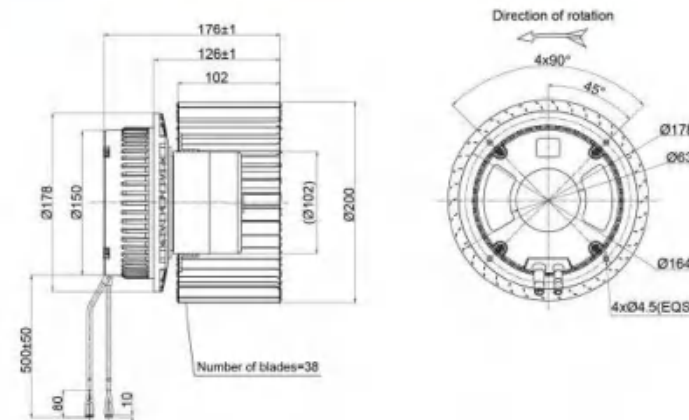


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PF3N200B2EM | BE102EC | BALL           | 230           | 50/60     | 3.1           | 510         | 1800        | 1700     | 440          | 77          |

Forward Curved Centrifugal Fans

## EC Blower Single Inlet Ø120mm

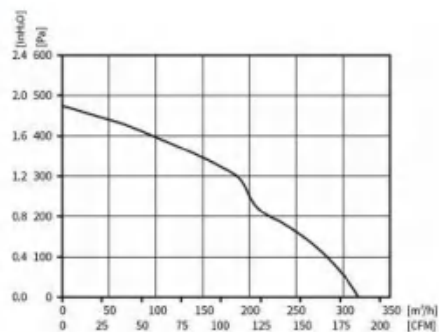


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 1.5KG  | E1          |

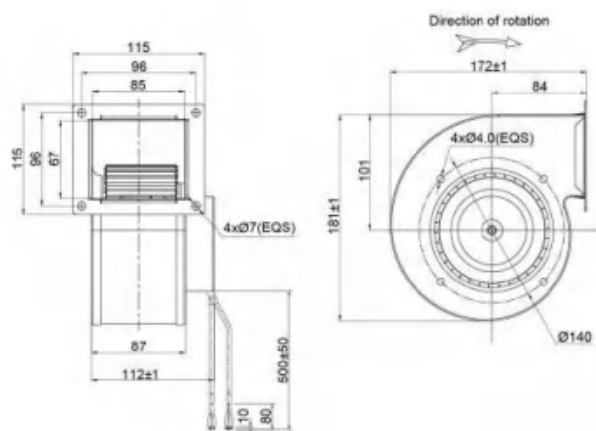


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N120B2EM | BE72EC | BALL           | 230           | 50/60     | 0.4           | 55          | 2400        | 317      | 471          | 58          |

## EC Blower Single Inlet Ø140mm

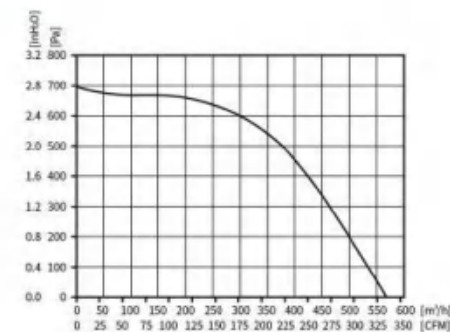


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.2KG  | E2          |


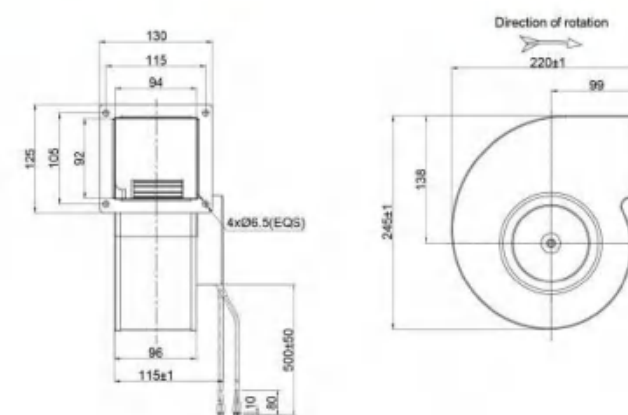


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N140B2EM | BE92EC | BALL           | 230           | 50/60     | 1.2           | 170         | 2600        | 567.7    | 696          | 70          |

## EC Blower Single Inlet Ø160mm

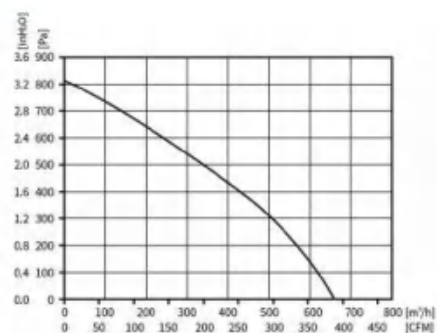


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3.2KG  | E2          |


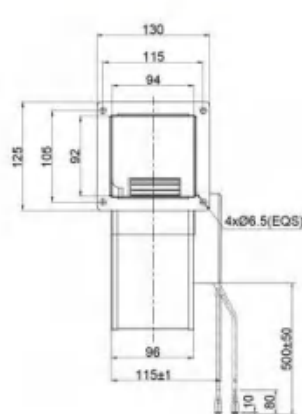


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N160B2EM | BE92EC | BALL           | 230           | 50/60     | 1.2           | 170         | 1950        | 688      | 810          | 72          |

## EC Blower Single Inlet Ø180mm

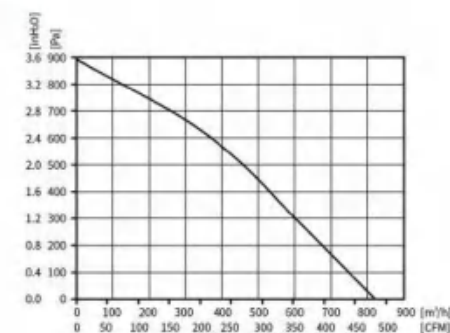


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 4.5KG  | E2          |


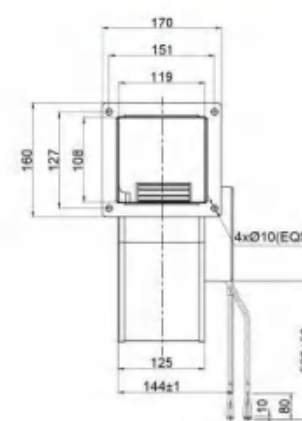


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N180B2EM | BE92EC | BALL           | 230           | 50/60     | 1.2           | 170         | 1500        | 820      | 900          | 70          |

## EC Blower Single Inlet Ø200mm


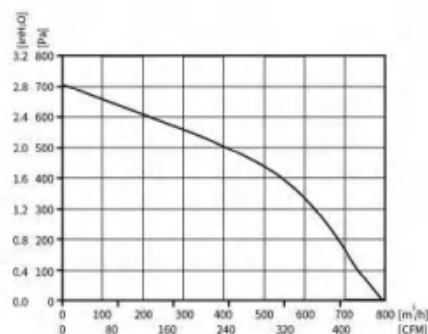


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C ~ +60°C         | 4.8KG  | E2          |


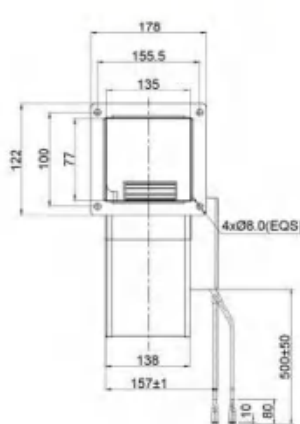


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N200B2EM | BE92EC | BALL           | 230           | 50/60     | 1.5           | 220         | 1600        | 792      | 708          | 64          |

## EC Blower Single Inlet Ø225mm

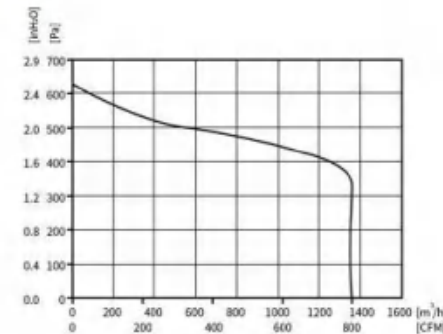


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C ~ +60°C         | 6.8KG  | E4          |

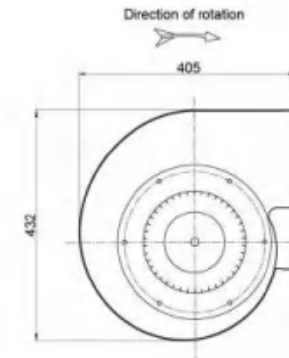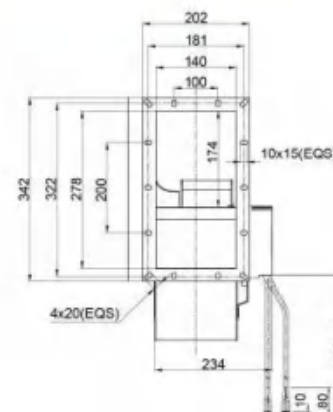


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | B/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N225B2EM | BE102EC | BALL           | 230           | 50/60     | 1.1           | 230         | 1090        | 1360     | 620          | 55          |

## EC Blower Single Inlet Ø250mm

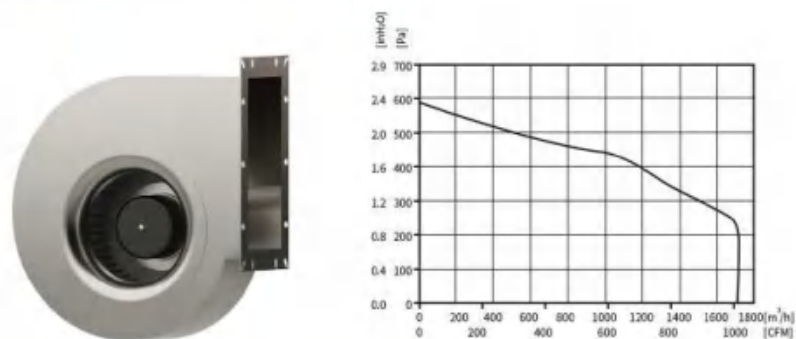


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 8.2KG  | E4          |

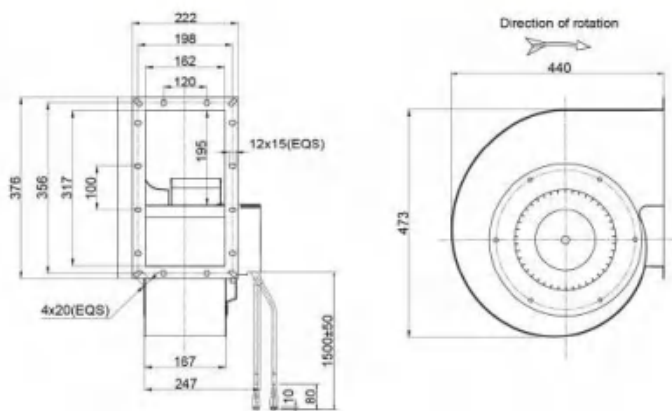


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | l/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N250B2EM | BE102EC | BALL           | 230           | 50/60     | 1.1           | 230         | 840         | 1710     | 580          | 50          |

## EC Blower Single Inlet Ø280mm

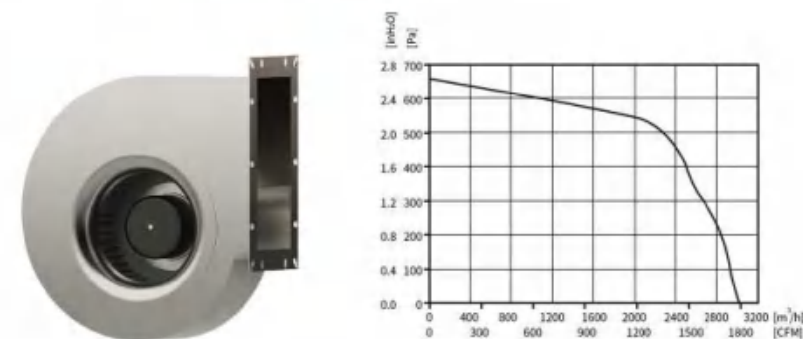


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 10.2KG | E6          |

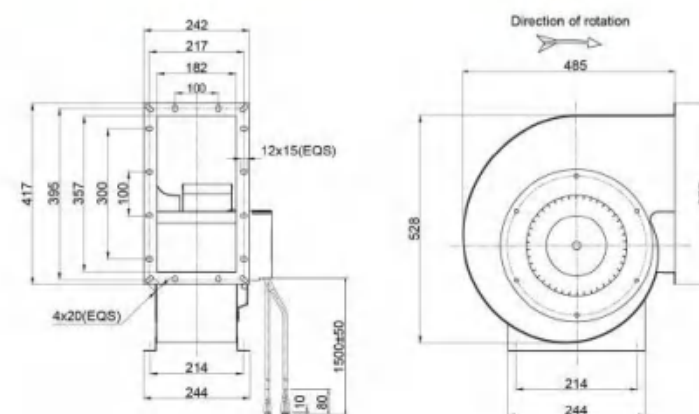


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | l/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PS3N280B4EM | BE138EC | BALL           | 380           | 50/60     | 1.6           | 950         | 1150        | 3000     | 650          | 79          |

## EC Blower Dual Inlet Ø133x190mm

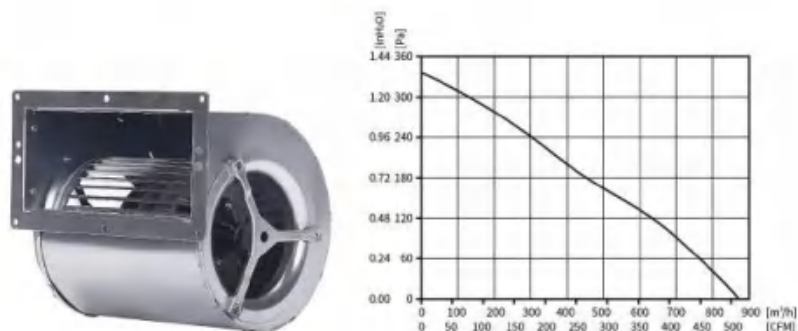


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EE BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10VDC/PWM   | IP44            | B                | -25°C~+60°C           | 3KG    | E1          |

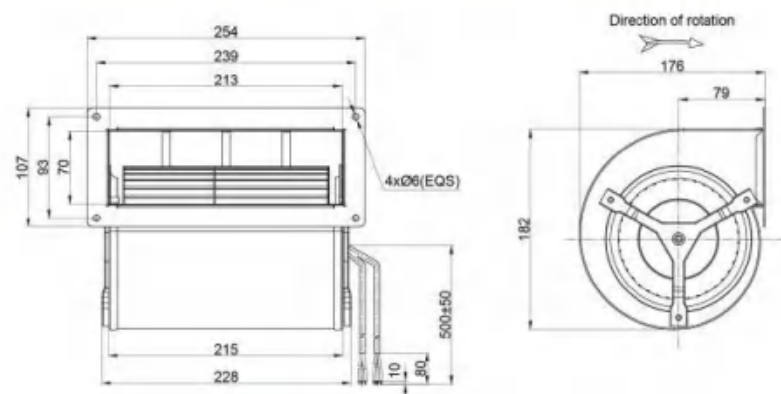


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N133B2EM | BE72EC | BALL           | 230           | 50/60     | 0.9           | 120         | 1500        | 880      | 340          | 65          |

## EC Blower Dual Inlet Ø146x190mm

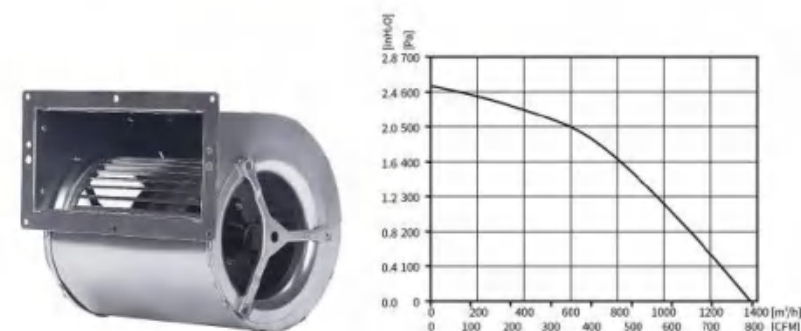


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EE BRUSHLESS EXTERNAL MOTOR MOTOR | 0-10 VDC/PWM  | IP44            | B                | -25°C~+60°C           | 4.5KG  | E2          |

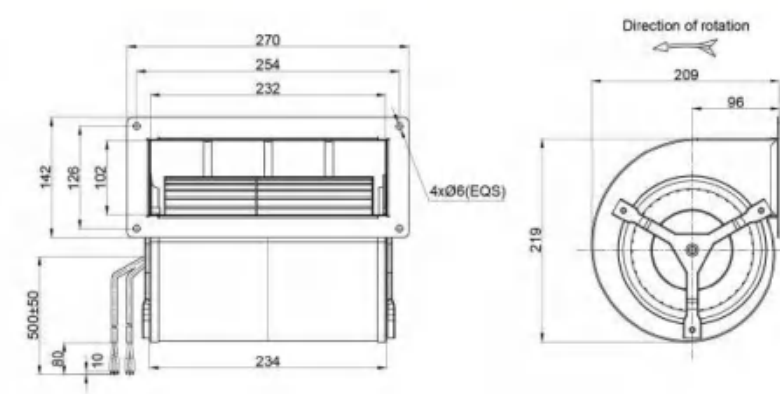


| Model       | Motor  | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|--------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type   | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N146B2EH | BE92EC | BALL           | 230           | 50/60     | 1.4           | 190         | 1750        | 1340     | 620          | 72          |

## EC Blower Dual Inlet Ø180x185mm

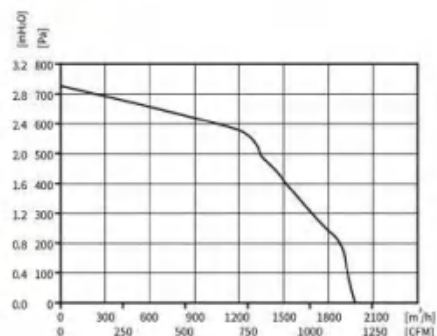


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EE BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 6.2KG  | E4          |

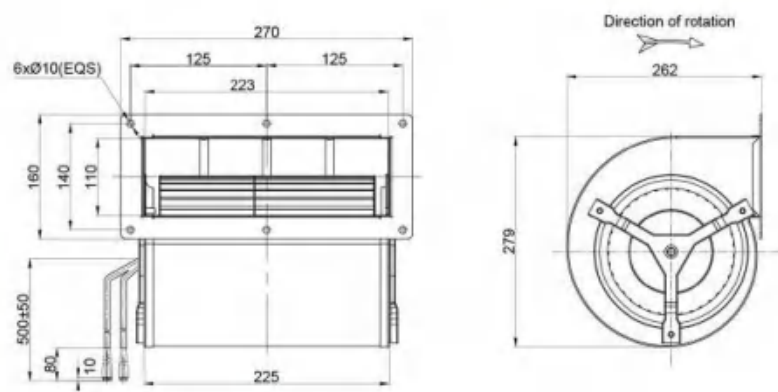


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N180B2EM | BE102EC | BALL           | 230           | 50/60     | 1.9           | 400         | 1550        | 2000     | 710          | 74          |

## EC Blower Dual Inlet Ø200x180mm

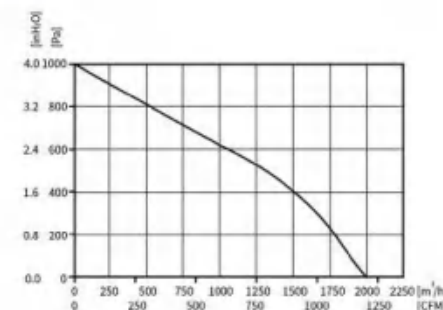


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EE BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 7.3KG  | E4          |


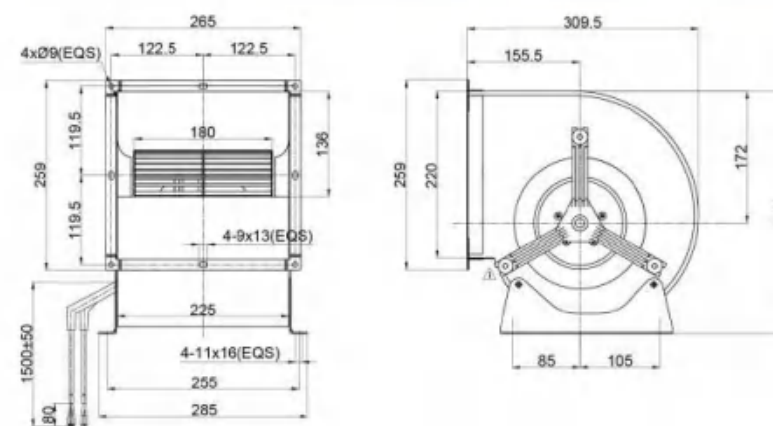


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N200B2EM | BE102EC | BALL           | 230           | 50/60     | 1.36          | 300         | 1150        | 2000     | 1000         | 64          |

## EC Blower Dual Inlet Ø225x202mm

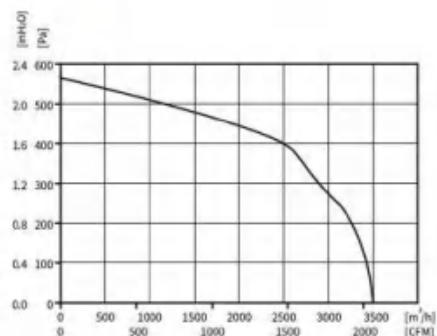


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 8.4KG  | E6          |

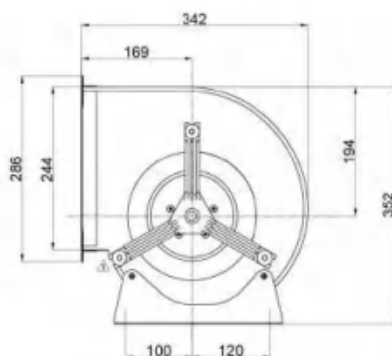
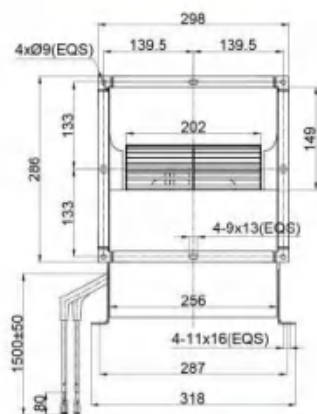


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N225B4EM | BE138EC | BALL           | 380           | 50/60     | 1.8           | 1050        | 1450        | 3500     | 560          | 78          |

## EC Blower Dual Inlet Ø250x224mm

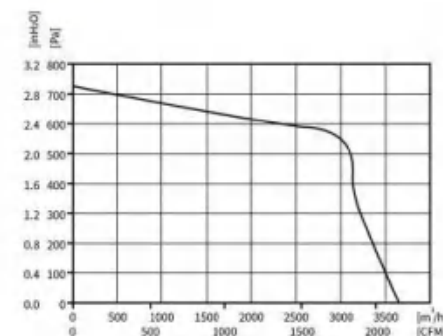


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EC BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 9.2KG  | E6          |

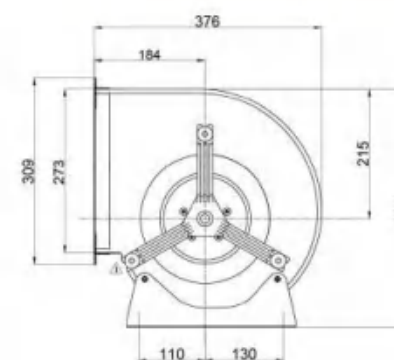
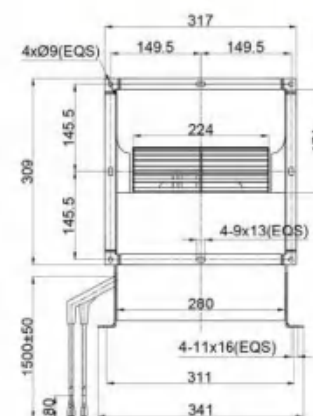


| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N250B4EM | BE138EC | BALL           | 380           | 50/60     | 1.2           | 655         | 920         | 3640     | 720          | 74          |

## EC Blower Dual Inlet Ø280x232mm



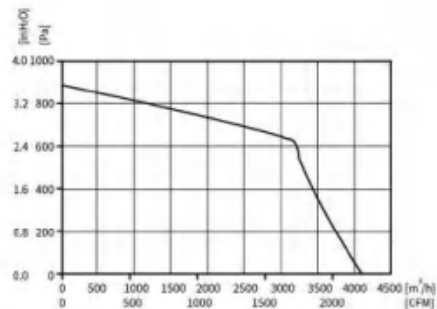


| Motor Type                        | Speed Control | Protection Type | Insulation Class | Operating Temperature | Weight | Wiring Mode |
|-----------------------------------|---------------|-----------------|------------------|-----------------------|--------|-------------|
| EF BRUSHLESS EXTERNAL ROTOR MOTOR | 0-10VDC/PWM   | IP44            | F                | -25°C~+60°C           | 11.3KG | E6          |

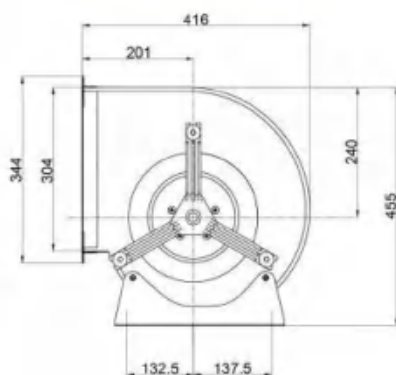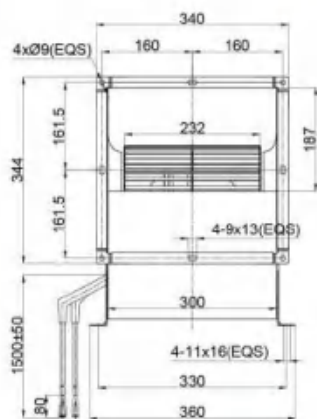




| Model       | Motor   | Bearing System | Rated Voltage | Frequency | Rated Current | Rated Power | Rated Speed | Air Flow | Air Pressure | Sound Level |
|-------------|---------|----------------|---------------|-----------|---------------|-------------|-------------|----------|--------------|-------------|
| Part No.    | Type    | M/S            | VAC           | Hz        | A             | W           | RPM         | M³/H     | Pa           | dB(A)       |
| PD3N280B4EM | BE138EC | BALL           | 380           | 50/60     | 1.1           | 600         | 800         | 4100     | 890          | 72          |

## EC-DC Motor

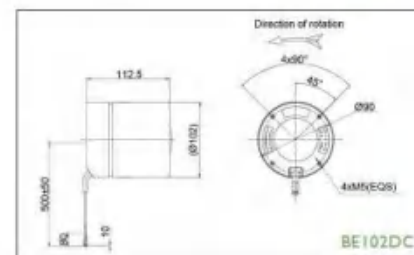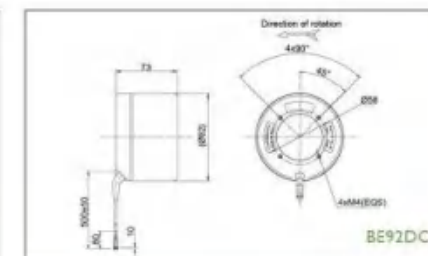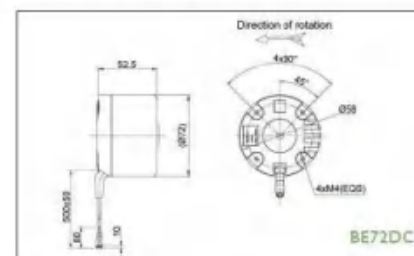


| Motor                 | BE72DC120W  | BE92DC230W  | BE102DC480W |
|-----------------------|-------------|-------------|-------------|
| Voltage               | 48V         | 48V         | 48V         |
| Current               | 2.5A        | 4.8A        | 10A         |
| Power                 | 120W        | 230W        | 480W        |
| Speed                 | 400-4450RPM | 400-3300RPM | 400-2200RPM |
| Operating Temperature | -25°C~+60°C | -25°C~+60°C | -25°C~+60°C |
| Wiring Mode           | D1          | D2          | D3          |

## EC-AC Motor

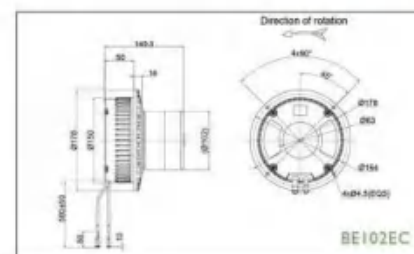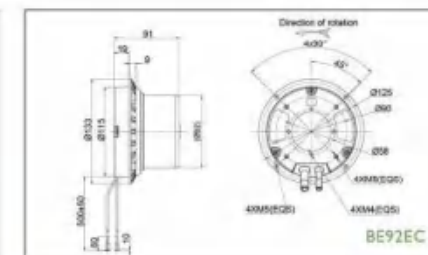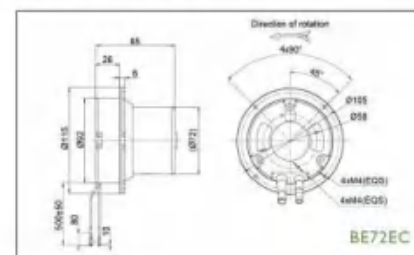

| Motor                 | BE72EC120W  | BE92EC230W  | BE102EC600W |
|-----------------------|-------------|-------------|-------------|
| Voltage               | 230V        | 230V        | 230V        |
| Frequency             | 50Hz        | 50Hz        | 50Hz        |
| Current               | 1.0A        | 1.7A        | 4.3A        |
| Power                 | 120W        | 230W        | 600W        |
| Speed                 | 400-4400RPM | 400-3500RPM | 400-3550RPM |
| Operating Temperature | -25°C~+60°C | -25°C~+60°C | -25°C~+60°C |
| Wiring Mode           | E1          | E2          | E3          |

## Inlet Rings

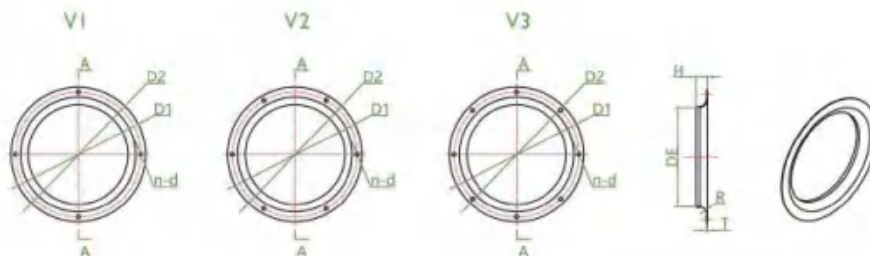

Inlet Rings for Backward Curved Centrifugal Fans

| Part Number | Size | Vers. | DE   | D1   | D2   | H     | T   | n-d    |
|-------------|------|-------|------|------|------|-------|-----|--------|
| PB3N133Bxx  | 133  | V1    | Ø88  | Ø118 | Ø129 | 13    | 1.5 | 4xØ4.5 |
| PB3N175Bxx  | 175  | V1    | Ø123 | Ø158 | Ø170 | 14    | 1.5 | 4xØ4.5 |
| PB3N190Bxx  | 190  | V1    | Ø123 | Ø158 | Ø170 | 14    | 1.5 | 4xØ4.5 |
| PB3N220Bxx  | 220  | V1    | Ø156 | Ø245 | Ø253 | 25    | 1.5 | 4xØ4.5 |
| PB3N225Bxx  | 225  | V1    | Ø145 | Ø210 | Ø223 | 27    | 1.5 | 4xØ4.5 |
| PB3N250Bxx  | 250  | V1    | Ø166 | Ø240 | Ø255 | 30    | 1.5 | 4xØ4.5 |
| PB3N280Bxx  | 280  | V1    | Ø181 | Ø260 | Ø280 | 34    | 1.5 | 4xØ4.5 |
| PB3N280Bxx  | 280  | V2    | Ø183 | Ø286 | Ø307 | 53.5  | 1.5 | 8xØ4.5 |
| PB3N310Bxx  | 310  | V1    | Ø206 | Ø280 | Ø300 | 30    | 1.5 | 4xØ4.5 |
| PB3N310Bxx  | 310  | V3    | Ø206 | Ø320 | Ø348 | 60.5  | 1.5 | 8xØ4.5 |
| PB3N355Bxx  | 355  | V1    | Ø240 | Ø325 | Ø350 | 30    | 1.5 | 4xØ4.5 |
| PB3N355Bxx  | 355  | V2    | Ø239 | Ø325 | Ø350 | 30    | 1.5 | 8xØ4.5 |
| PB3N400Bxx  | 400  | V2    | Ø258 | Ø345 | Ø369 | 35    | 1.5 | 8xØ4.5 |
| PB3N400Bxx  | 400  | V3    | Ø260 | Ø395 | Ø422 | 77.5  | 1.5 | 8xØ11  |
| PB3N450Bxx  | 450  | V2    | Ø303 | Ø420 | Ø450 | 74.5  | 1.5 | 8xØ11  |
| PB3N450Bxx  | 450  | V3    | Ø293 | Ø438 | Ø464 | 83    | 1.5 | 8xØ11  |
| PB3N500Bxx  | 500  | V1    | Ø324 | Ø490 | Ø519 | 99    | 1.5 | 8xØ11  |
| PB3N560Bxx  | 560  | V3    | Ø369 | Ø540 | Ø564 | 106.5 | 1.5 | 8xØ11  |
| PB3N630Bxx  | 630  | V3    | Ø412 | Ø610 | Ø640 | 115.5 | 1.5 | 8xØ11  |

## Fan Controller



### 1. Product Introduction

The fan controller is an external Modbus controller, which can realize single control and multiple centralized control. The controller has a built-in Mod-bus communication protocol to control the operation of the fan through the group control system. It is mostly used in FFU group control occasions.

### 2. The Main Function

The controller controls the fan speed through speed feedback, and uses the principle of speed closed-loop control to control the fan operation. Its main functions are:

- Control the start and stop and speed regulation of each fan through the host;
- Remote centralized control and fault diagnosis can be realized;
- Each control unit module has a settable ID address;
- The current speed and current ID number can be displayed;
- With alarm function.

### 3. Product Dimensions and Installation Requirements

The controller is powered by the fan without external power supply; the controller is equipped with 2P and 4P quick connect terminals for connection, making the connection simpler and more convenient. The product is designed as a panel installation method, which is convenient for installation and construction. See the figure below for the opening size: 152mm x 57mm.




### 4. Product Application Areas

This product is mainly used in the field of FFU, which can make ordinary EC fans realize group control function, and can effectively solve the problem of group control of ordinary fans.

## PS2 intelligent multi-functional touch screen controller

### 1. General description


PS2-PM2.5/CO2 controller adopts touch technology, which is flexible and convenient. There are sensors which can monitor the indoor temperature, humidity, PM2.5 and CO2 concentration detection function. The output signal of controller can directly control the starting and RPM of the fresh air. It can be widely used in residential, commercial and industrial conditions, and effectively improve the air quality, create a healthy, comfortable, efficient, environmental protection and energy-saving living environment.

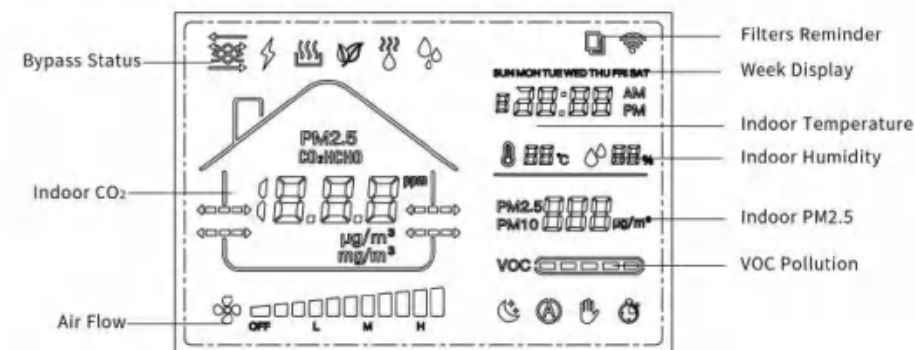

# Wiring Diagram

IP44 D1-DC Motor 72(Nominal voltage 12/24/48/85/110/310VDC)


Customer Circuit

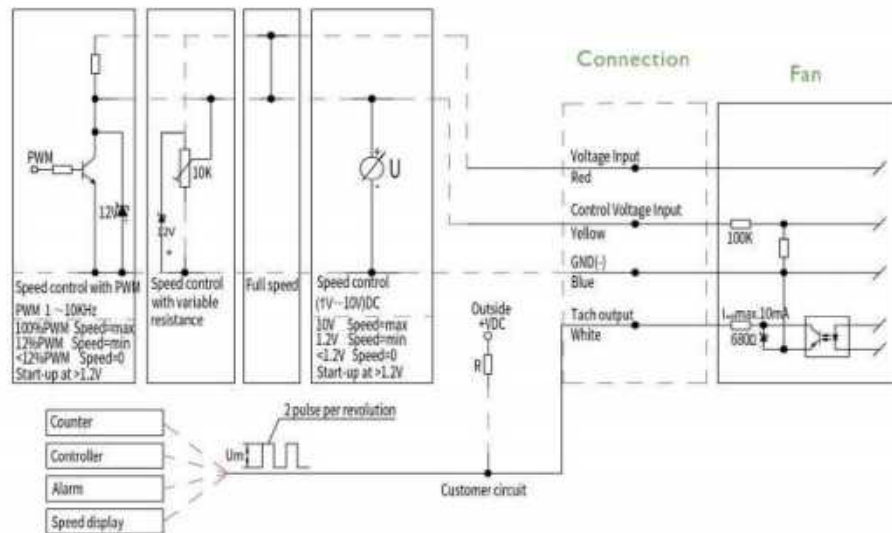

# Wiring Diagram

IP44 D2-DC Motor 92(Nominal voltage 12/24/48/85/110/310VDC)

Customer Circuit

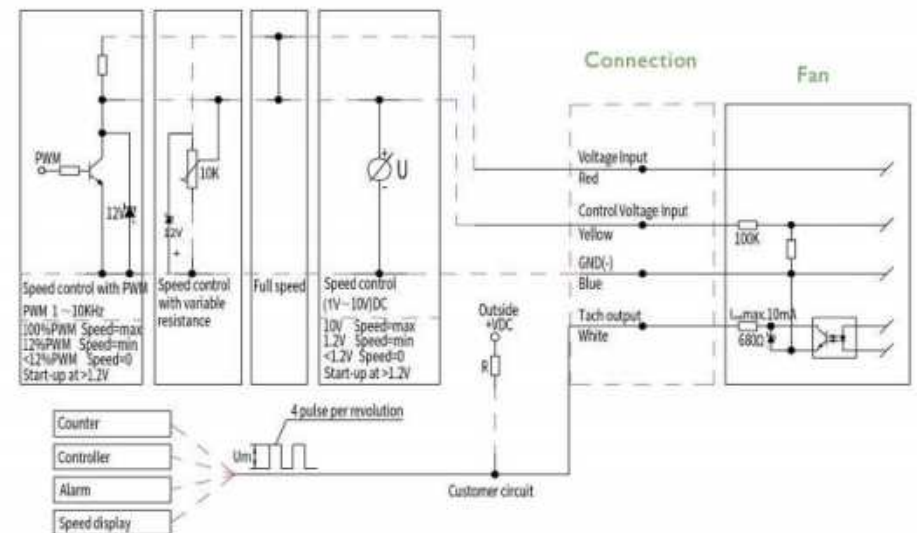

Red= +  
Yellow= 0-10VDC/PWM  
White= FG  
Blue= GND


| Signal      | Color  | Assignment/Function               |
|-------------|--------|-----------------------------------|
| +           | Red    | Voltage Input                     |
| 0-10VDC/PWM | Yellow | Control Input                     |
| Tach output | White  | Tach output:2 puls per revolution |
| GND         | Blue   | GND                               |

Red= +  
Yellow= 0-10VDC/PWM  
White= FG  
Blue= GND

| Signal      | Color  | Assignment/Function               |
|-------------|--------|-----------------------------------|
| +           | Red    | Voltage Input                     |
| 0-10VDC/PWM | Yellow | Control Input                     |
| Tach output | White  | Tach output:4 puls per revolution |
| GND         | Blue   | GND                               |


## Wiring Diagram

IP44 D3-DC Motor 102(Nominal voltage 12/24/48/85/110/310VDC)

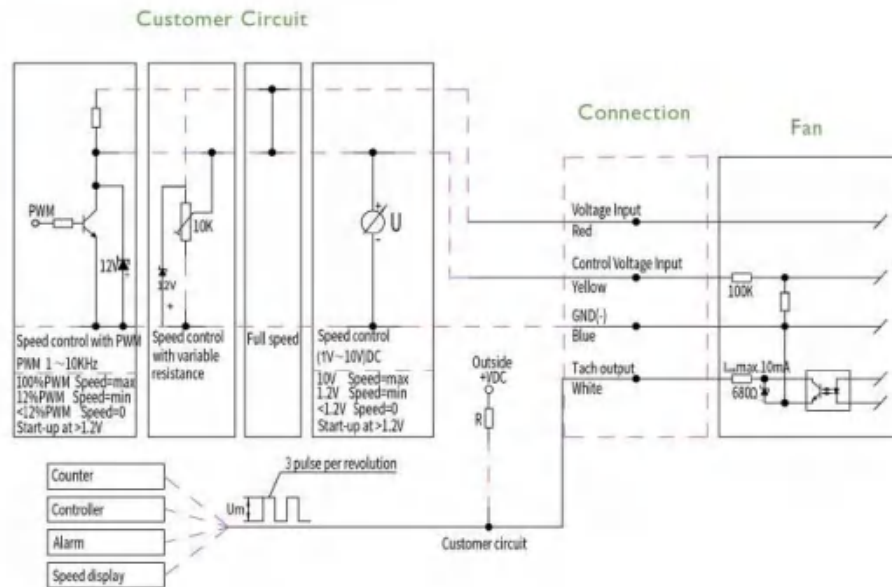

## Wiring Diagram

IP44 E-EC Motor 72(Nominal voltage 115/230VAC)

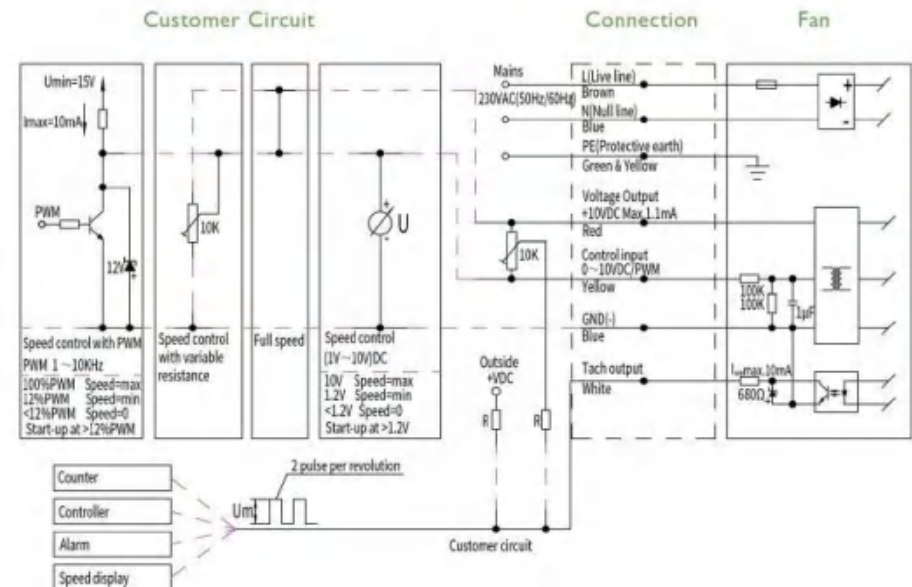

### Line1(AC)

Brown= L(Live Line)  
Blue= N(Null Line)  
Green & Yellow=PE(Protective Earth)

### Line2(DC)

Red= Voltage Output +10VDC  
Yellow= 0-10VDC/PWM  
White= FG  
Blue= GND

### Signal

| Signal | Color          | Assignment/Function    |
|--------|----------------|------------------------|
| L      | Brown          | Mains 50/60 Hz phase   |
| N      | Blue           | Mains 50/60 Hz neutral |
| PE     | Green & Yellow | Protective Earth       |

### Signal

| Signal      | Color  | Assignment/Function                |
|-------------|--------|------------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA    |
| 0-10VDC/PWM | Yellow | Control Input                      |
| Tach Output | White  | Tach Output: 2 puls per revolution |
| GND         | Blue   | GND                                |

Red= +

Yellow= 0-10VDC/PWM

White= FG


Blue= GND

### Signal

| Signal      | Color  | Assignment/Function                 |
|-------------|--------|-------------------------------------|
| +           | Red    | Voltage Input                       |
| 0-10VDC/PWM | Yellow | Control Input                       |
| Tach output | White  | Tach output: 3 pulse per revolution |
| GND         | Blue   | GND                                 |

# Wiring Diagram

IP44 E2-EC Motor 92(Nominal voltage 115/230VAC)

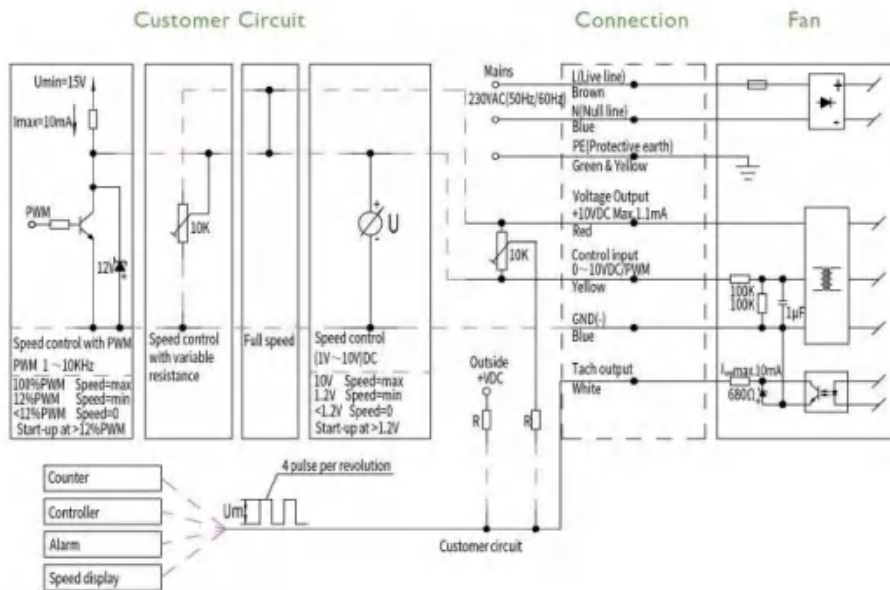

**Line1(AC)**  
Brown= L(Live Line)  
Blue= N(Null Line)  
Green & Yellow=PE(Protective Earth)


**Line2(DC)**  
Red= Voltage Output +10VDC  
Yellow= 0-10VDC/PWM  
White= FG  
Blue= GND

| Signal | Color          | Assignment/Function    |
|--------|----------------|------------------------|
| L      | Brown          | Mains 50/60 Hz phase   |
| N      | Blue           | Mains 50/60 Hz neutral |
| PE     | Green & Yellow | Protective Earth       |

| Signal      | Color  | Assignment/Function               |
|-------------|--------|-----------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA   |
| 0-10VDC/PWM | Yellow | Control Input                     |
| Tach Output | White  | Tach Output 4 puls per revolution |
| GND         | Blue   | GND                               |

# Wiring Diagram

IP44 E3-EC Motor 102(Nominal voltage 115/230VAC)

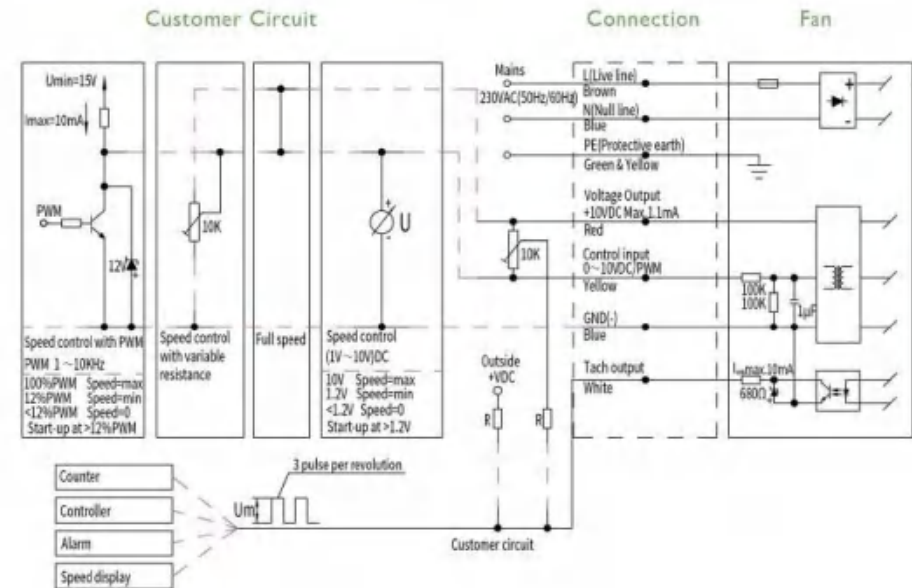

**Line1(AC)**  
Brown= L(Live Line)  
Blue= N(Null Line)  
Green & Yellow=PE(Protective Earth)


**Line2(DC)**  
Red= Voltage Output +10VDC  
Yellow= 0-10VDC/PWM  
White= FG  
Blue= GND

| Signal | Color          | Assignment/Function    |
|--------|----------------|------------------------|
| L      | Brown          | Mains 50/60 Hz phase   |
| N      | Blue           | Mains 50/60 Hz neutral |
| PE     | Green & Yellow | Protective Earth       |

| Signal      | Color  | Assignment/Function               |
|-------------|--------|-----------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA   |
| 0-10VDC/PWM | Yellow | Control Input                     |
| Tach Output | White  | Tach Output 3 puls per revolution |
| GND         | Blue   | GND                               |

# Wiring Diagram

P44 E4-EC Motor 102(Nominal voltage 115/230VAC)

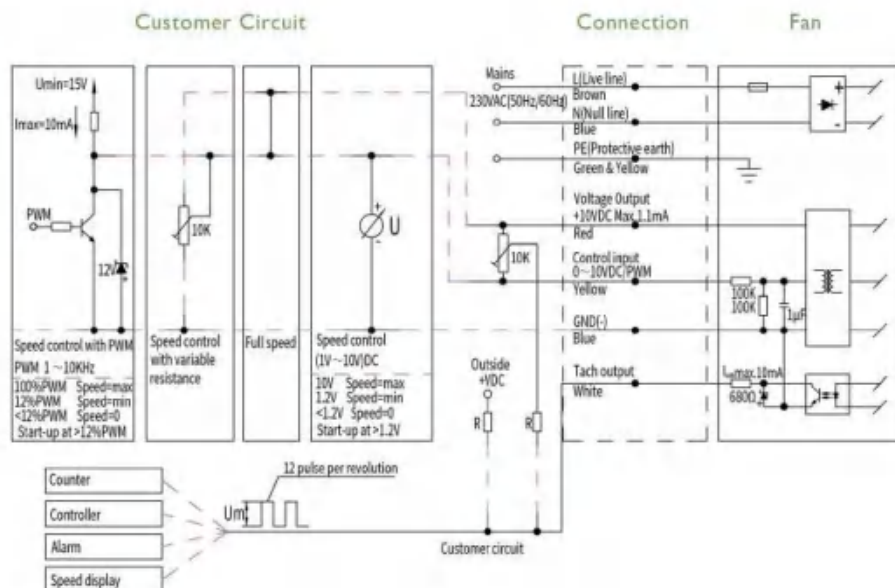

Line1(AC)

Brown= L(Live Line)

Blue= N(Null Line)

Green & Yellow=PE(Protective Earth)

Line2(DC)

Red= Voltage Output +10VDC

Yellow= 0~10VDC/PWM

White= FG


Blue= GND

| Signal | Color          | Assignment/Function    |
|--------|----------------|------------------------|
| L      | Brown          | Mains 50/60 Hz phase   |
| N      | Blue           | Mains 50/60 Hz neutral |
| PE     | Green & Yellow | Protective Earth       |

| Signal      | Color  | Assignment/Function                |
|-------------|--------|------------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA    |
| 0~10VDC/PWM | Yellow | Control Input                      |
| Tach Output | White  | Tach Output 12 puls per revolution |
| GND         | Blue   | GND                                |

# Wiring Diagram

P44 E5-EC Motor 138(Nominal voltage 115/230VAC)

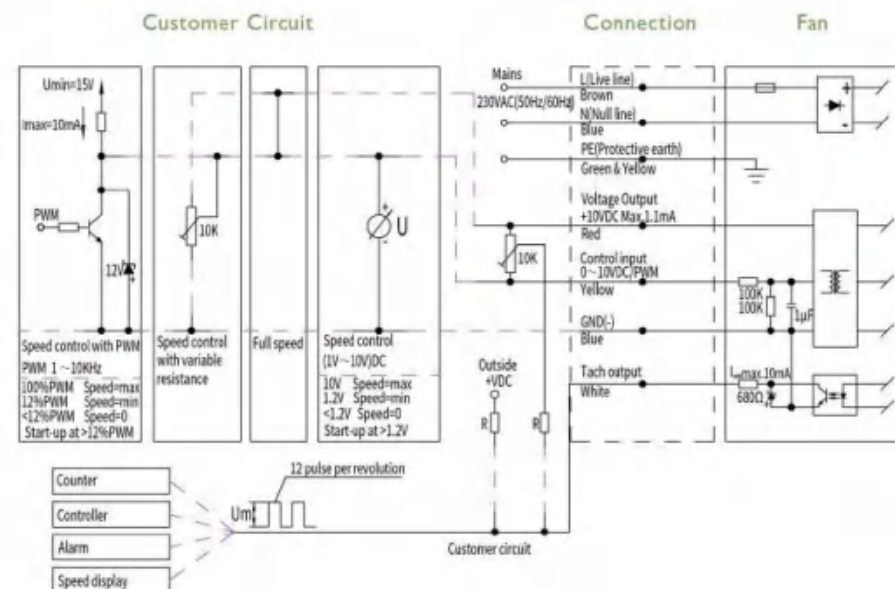

Line1(AC)

Brown= L(Live Line)

Blue= N(Null Line)

Green & Yellow=PE(Protective Earth)

Line2(DC)

Red= Voltage Output +10VDC

Yellow= 0~10VDC/PWM

White= FG


Blue= GND

| Signal | Color          | Assignment/Function    |
|--------|----------------|------------------------|
| L      | Brown          | Mains 50/60 Hz phase   |
| N      | Blue           | Mains 50/60 Hz neutral |
| PE     | Green & Yellow | Protective Earth       |

| Signal      | Color  | Assignment/Function                |
|-------------|--------|------------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA    |
| 0~10VDC/PWM | Yellow | Control Input                      |
| Tach Output | White  | Tach Output 12 puls per revolution |
| GND         | Blue   | GND                                |

# Wiring Diagram

IP44 E6-EC Motor 102/138/188(Nominal voltage 380VAC)

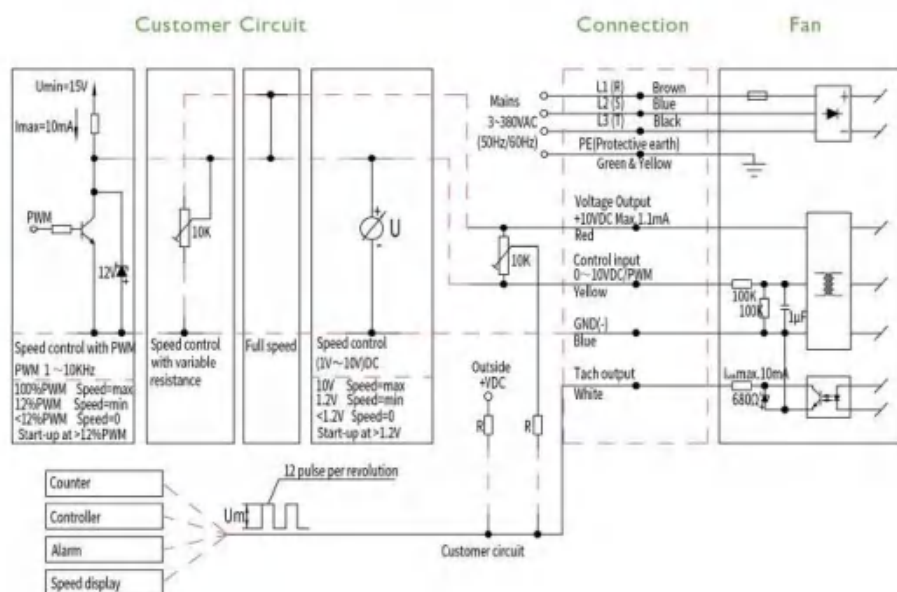

**Line1(AC)**

- Brown= L1
- Blue= L2
- Black=L3
- Green & Yellow=PE(Protective Earth)

**Line2(DC)**


- Red= Voltage Output +10VDC
- Yellow= 0-10VDC/PWM
- White= FG
- Blue= GND

| Signal | Color          | Assignment/Function |
|--------|----------------|---------------------|
| L1     | Brown          | Mains 50/60 Hz,R    |
| L2     | Blue           | Mains 50/60 Hz,S    |
| L3     | Black          | Mains 50/60 Hz,T    |
| PE     | Green & Yellow | Protective Earth    |

| Signal      | Color  | Assignment/Function              |
|-------------|--------|----------------------------------|
| +10VDC      | Red    | Voltage Output +10VDC max 1.1mA  |
| 0-10VDC/PWM | Yellow | Control Input                    |
| Tach output | White  | Tach Output ~puls per revolution |
| GND         | Blue   | GND                              |

# Wiring Diagram

IP44 E7-EC Motor 102/138(380VAC) with Modbus

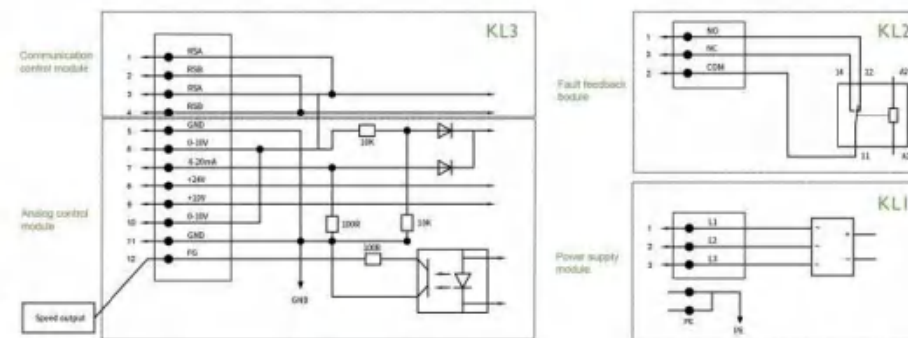


## Electrical Connections with Modbus

| Connector | Pin | Signal    | Assignment/Function                                                                                                       |
|-----------|-----|-----------|---------------------------------------------------------------------------------------------------------------------------|
| R1.1      | 1.  | L1        | Mains supply connection.                                                                                                  |
|           | 2.  | L2        | Supply voltage 3-380-480VAC/50/60Hz.                                                                                      |
|           | 3.  | L3        |                                                                                                                           |
| PE        |     | PE        | Earth connection,PE connection                                                                                            |
| K1.1      | 1.  | NO        | The relay is normally open,the fan is not powered and normally operation,open with COM,the fan is fails,closed with COM   |
|           | 2.  | COM       | Status relay,common connection,contact rating 250VAC/2A(AC1)                                                              |
|           | 3.  | NC        | The relay is normally closed,the fan is not powered and normally operation,closed with COM,the fan is fails,open with COM |
| KL3       | 1.  | RSA       | Bus connection RS485,RSAMODBUS RTU                                                                                        |
|           | 2.  | RSB       | Bus connection RS485,RSAMODBUS RTU                                                                                        |
|           | 3.  | RSA       | Bus connection RS485,RSAMODBUS RTU                                                                                        |
|           | 4.  | RSB       | Bus connection RS485,RSAMODBUS RTU                                                                                        |
|           | 5.  | GND       | Single ground for control interface KL3.                                                                                  |
| KL2       | 6.  | 0-10V/PWM | Control input 0-10VDC/PWM,only usable as alternative to input 4-20mA.                                                     |
|           | 7.  | 4-20mA    | Analogue control input 4-20mA/only usable as alternative to input 0-10VDC/PWM                                             |
|           | 8.  | +24V      | Fixed voltage output 24VDC±2V max20mA;Power supply for ext.devices.                                                       |
|           | 9.  | +10V      | Fixed voltage output 10VDC±1V max5mA;Power supply for ext.devices.                                                        |
|           | 10. | 0-10V/PWM | Control input 0-10VDC/PWM,only usable as alternative to input 4-20mA.                                                     |
|           | 11. | GND       | Single ground for control interface KL3.                                                                                  |
|           | 12. | FG        | Speed signal feedback.                                                                                                    |

## Effects of installation space

When mounting our product in a rectangular box, air performance might be reduced.

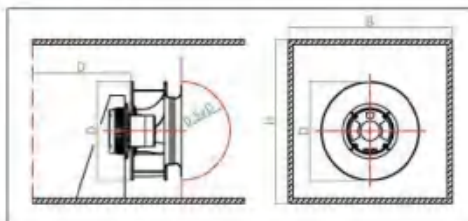


dh = Hydraulic diameter

Formula:  $dh = 2 \times B \times H / (B + H)$

B = Width of box

H = Height of box



D = Outer diameter of the fan

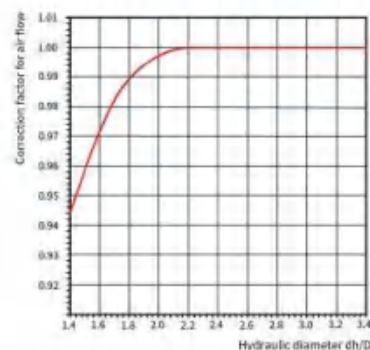


## Effects of centrifugal air gap change

The centrifugal air gap between the inlet ring and the impeller cover affects centrifugal fan air flow and operation efficiency. Changes in the size of the inlet ring air gap affects the following curve:

- ①:  $s/D = 0.4\%$     ②:  $s/D = 1.0\%$     ③:  $s/D = 1.4\%$

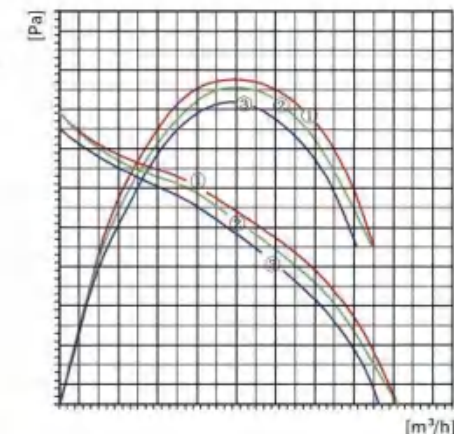

## Defining air flow rate for inlet rings with pressure relief

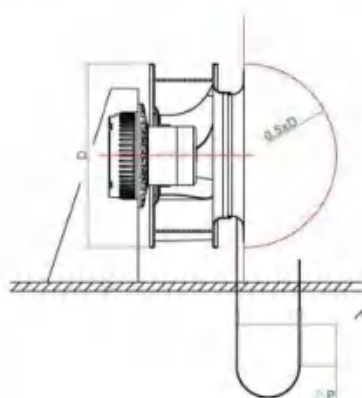

The differential pressure approach compares the static pressure before the inlet nozzle with the static pressure inside the inlet nozzle. Air flow can be calculated on the basis of the differential pressure (difference in pressure of the static pressures) in keeping with the following equation:

$$qv = k \cdot \sqrt{\Delta p} \quad qv \text{ in } [m^3/h] \text{ and } \Delta p \text{ in } [Pa]$$

If constant air flow is to be controlled, then the nozzle pressure has to be kept constant:



$$\Delta p = qv^2 : k^2$$

k takes into account the specific nozzle characteristics. Differences in static pressure are measured in 1/4 measuring point(s) along the circumference of the inlet nozzle. Connection on the customer side is accomplished via a pre-mounted T tube connector. This tube connector is suited for pneumatic hoses with an internal diameter of 4 mm.

## Effects of overlapping dimension

The axial overlap between the inlet ring and the impeller cover affects centrifugal fan air flow and operation efficiency. Overlap changes affect the following curve:

- ①:  $x/D = 0.6\%$     ②:  $x/D = 0\%$     ③:  $x/D = -0.6\%$

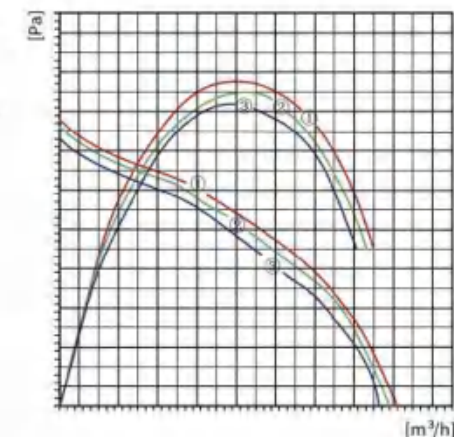

# Precision Noise Measuring

## Measurement conditions for air and noise measurement

PBM products are measured under the following conditions:

- Axial and diagonal fans in direction of rotation "V" in full nozzle and without guard grille
- Backward curved centrifugal fans, free-running and with inlet nozzle
- Forward curved single and dual inlet centrifugal fans with housing

## Noise measurements


All noise measurements are carried out in low-reflective test rooms with reverberant floor. Thus the PBM acoustic test chambers meet the requirements of precision class 1 according to DIN EN ISO 3745. For noise measurement, the fans being tested are placed in a reverberant wall and operated at nominal voltage (for AC, also at nominal frequency) without additional attachments such as the guard grille.

## Sound pressure level and sound level

All acoustic values are established according to ISO 13347, DIN 45635 and ISO 3744/3745 to accuracy class 2 and given in A-rated form. When the sound pressure level ( $L_p$ ) is measured, the microphone is on the intake side of the fan being tested, usually at a distance of 1 m on the fan axis.

To measure the sound power level ( $L_w$ ), 10 microphones are distributed over an enveloping surface on the intake side of the fan being tested (see graphic). The sound power level measured can be roughly calculated from the sound pressure level by adding 7 dB.

Measuring configuration as per ISO 13347-3 respectively DIN 45635-38.10 measuring points

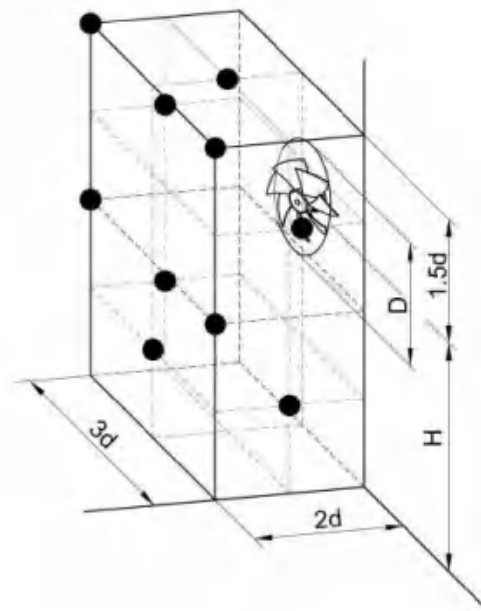


$d \geq D$   
 $H = 1.5d \dots 4.5d$   
 Measurement area  $S = 6d^2 + 7d(H + 1.5d)$

## Combined level of multiple same-level sound sources

Adding 2 noise sources with the same level results in a level increase of approx. 3 dB. The noise characteristics of multiple identical fans can be determined in advance based on the noise values specified in the data sheet. This is shown in the diagram opposite.


**Example:** 9 PCS PG3N400B2EH axial fans are on a condenser. According to the data sheet, the sound pressure level of a fan is approximately 67 dB(A). The level increase measured from the diagram is 9 dB. Thus the overall sound level of the installation can be expected to be 76 dB(A).



## Combined level of two different-level sound sources

The acoustic performance of two different fans can be predetermined based on the sound levels given in the data sheet. This is shown in the diagram opposite.


**Example:** There is an axial fan PG3N400B2EH with a sound pressure level of 67 dB(A) at the operating point and an axial fan PG3N300B2EM with 72 dB(A) in a ventilation unit. The level difference is 5 dB. The level increase can now be read in the diagram as approx. 1.2 dB. This means that the overall sound level of the unit can be expected to be 73.2 dB(A).



## Distance laws

Sound power level is independent from distance to the sound source. In contrast to this, sound pressure level decreases the further away the noise source is. The adjacent diagram shows the decrease in level under far sound field conditions. Far sound field conditions apply whenever the distance between microphone and fan is big when compared to fan diameter and wavelength to be considered. For more information on far sound field, please consult the relevant literature on this complex topic. Per doubling of distance, the level in the far sound field decreases by 6 dB. In the near field of the fan, other correlations apply and the decrease in levels can be considerably smaller. The following example only applies to far sound field conditions and can vary strongly depending on the installation effects.

**Example:** An axial fan PG3N400B2EH, a sound pressure level of 67 dB(A) was measured at a distance of 1 m. According to the adjacent diagram, at a distance of 10 m we would get a reduction by 19.5 dB, i.e. a sound pressure level of 47.5 dB(A).



# How to Choose Fans Correctly

All need to use is the electrical machinery and electronic products project engineer which the ventilator radiates, a specific system that radiates the needed amount of air flow is a must, the amount of air flow is decided by the understanding system power consumption and the ability of carrying off the enough quantity of heat. Try to prevent the system superheat situation. The fact demonstrated that the system service life can be reduced as a result of the cooling system insufficiency, therefore project engineer also should understand system sales volume and price, possibly because the system service life symbol user did not anticipate drops. If you'd like to choose the correct well ventilated module, the following goals need to be considered:

- Best air transport efficiency
- Smallest suitable size
- Lowest noise
- Smallest power consumption
- Biggest margin of safety and service life
- Reasonable total cost

So following three steps to correctly choose radiation fan or the drum ventilator, help you achieve the above goals:

Total cooling demand, first must understand three key aspects by obtaining the cooling demand the quantity of heat that must be transformed(temperature DT). Counterbalance transformation quantity of heat wattage(W). The detachment quantity of heat needs amount of wind(CFM).

The total cooling demand regarding of system operating effectively is really important. The effective system operation must provide the Ideal operation condition, enables in all systems the module to display the biggest function and the longest service life.

The following available ways are generally used when choosing the ventilator motor:

- Figures out quantity of heat which the equipment interior produces
- Decided the equipment interior can permit temperature rise scope
- Amount of air flow needs which from the equation computation
- If the known system equipment interior heat dissipating capacity and the permission total temperature rise quantity, may obtain the amount of wind which is for the cooling equipment needs,

Following into basic hot transformation equation:

$$H = C_p \times W \times \Delta T$$

in which: H = Hot transformation quantity

C<sub>p</sub> = Air specific heat


ΔT = In the equipment rises temperature

W = Air flow weight

We know (W = CFM x D) in which D = is mad the density after the substitution, We obtain,Conversion factors

With the substitution sea level air specific heat and the density, may obtain following radiation equation:

$$CFM = 3160 \times KW / \Delta T$$

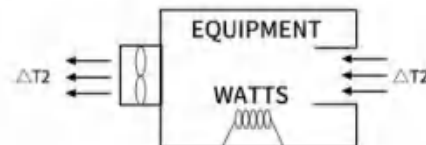

Eg(a): The equipment internal consumption electric power is 500W, the temperature difference is 20 degrees Fahrenheit, please see the computed result below:

$$Q = \frac{3.16 \times 500(W)}{20} = 79CFM \quad \text{or} \quad Q = \frac{0.09 \times 500(W)}{20} = 2.25m^3/Min$$

(b) The equipment internal consumption electric power is 500W, the temperature difference is 10 degrees centigrade:

$$Q = \frac{1.76 \times 500(W)}{20} = 88CFM \quad \text{or} \quad Q = \frac{0.05 \times 500(W)}{20} = 2.5m^3/Min$$

Amount of Wind Conversion Table

| CMS                   | CMM    | L/s               | L/min                | CMH                 | CFS                   | CFM                   |
|-----------------------|--------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| 1                     | 60     | 1x10 <sup>3</sup> | 6x10 <sup>4</sup>    | 3.6x10 <sup>3</sup> | 35.30                 | 2.118x10 <sup>3</sup> |
| 0.0167                | 1      | 460               | 1x10 <sup>2</sup>    | 60                  | 0.5885                | 35.30                 |
| 0.001                 | 0.06   | 1                 | 60                   | 3.60                | 0.0353                | 2.12                  |
| 1.67x10 <sup>-3</sup> | 0.001  | 0.0167            | 1                    | 0.06                | 5.88x10 <sup>-4</sup> | 0.0353                |
| 2.77x10 <sup>-4</sup> | 0.0167 | 0.277             | 16.7                 | 1                   | 9.81x10 <sup>-3</sup> | 0.5885                |
| 0.0283                | 1.698  | 460               | 1.69x10 <sup>3</sup> | 101.9               | 1                     | 60                    |
| 4.7x10 <sup>-4</sup>  | 0.0283 | 0.47              | 28.3                 | 1.698               | 0.0167                | 1                     |

Static pressure conversion table

| Pa                    | Bar                    | Torr                   | kgf/cm <sup>2</sup>    | mmH <sub>2</sub> O    | inHg                   | psi                   |
|-----------------------|------------------------|------------------------|------------------------|-----------------------|------------------------|-----------------------|
| 1                     | 1x10 <sup>-5</sup>     | 7.501x10 <sup>-3</sup> | 1.02x10 <sup>-6</sup>  | 0.1021                | 2.953x10 <sup>-4</sup> | 1.45x10 <sup>-4</sup> |
| 1x10 <sup>-5</sup>    | 1                      | 750.10                 | 1.02                   | 1.02x10 <sup>4</sup>  | 29.53                  | 14.50                 |
| 133.30                | 1.33x10 <sup>-3</sup>  | 1                      | 1.359x10 <sup>-3</sup> | 13.61                 | 0.03937                | 0.01934               |
| 9.807x10 <sup>4</sup> | 0.9807                 | 735.5                  | 1                      | 1.001x10 <sup>4</sup> | 28.96                  | 14.22                 |
| 9.807                 | 9.807x10 <sup>-5</sup> | 0.07348                | 9.96x10 <sup>-6</sup>  | 1                     | 2.89x10 <sup>-3</sup>  | 1.42x10 <sup>-3</sup> |
| 3.386x10 <sup>3</sup> | 0.03386                | 25.4                   | 0.03453                | 345.6                 | 1                      | 0.4912                |
| 6.895x10 <sup>3</sup> | 1.013                  | 760                    | 1.033                  | 1.034x10 <sup>4</sup> | 29.92                  | 14.7                  |

The following available ways are generally used when choosing the ventilator motor:

- Figures out quantity of heat which the equipment interior produces
- Decided the equipment interior can permit temperature rise scope
- Amount of air flow needs which from the equation computation
- If the known system equipment interior heat dissipating capacity and the permission total temperature rise quantity, may obtain the amount of air flow which is for the cooling equipment needs.

## Fan Selection Guide



In order to provide you with more considerate fan selection and technical solution services, please provide your demand information in the following table as much as possible:

|                                           |    |                                           |    |
|-------------------------------------------|----|-------------------------------------------|----|
| Note: The Red * marked is required.       |    | Date                                      |    |
| Project Name                              |    | * Client Name                             |    |
| * Applied to Which Products or Industries |    | Special Working Conditions to be Reminded |    |
| Fan Mounting Space Size (LxWxH)           | mm | Motor Type                                |    |
| * Blade Type and Materials                |    | * Impeller Size (LxWxH)                   | mm |

Is it possible to provide 《Fan Technical Requirements List 》 or replaced fan specification or replaced fan brand & model number?

| Fan's Key Technical Requirements | Key Parameters | P/Q | Replaced Fan Brand | Replaced Fan Model Number | Photo of Replaced Fan Name Plate |
|----------------------------------|----------------|-----|--------------------|---------------------------|----------------------------------|
|                                  |                |     |                    |                           |                                  |

### Key Technical Parameter Information For Fan Selection

|                                           |  |                                        |                                |
|-------------------------------------------|--|----------------------------------------|--------------------------------|
| * Rated Voltage (V)                       |  | Max. Current (A)                       | Frequency (HZ)                 |
| Rated Power(W)                            |  | Motor Output Power (W)                 | Bearing Type                   |
| * Max. Airflow (M <sup>3</sup> /H)        |  | * Max. Air Pressure (Pa)               | * Speed (RPM)                  |
| Operation Point's Air Flow & Air Pressure |  | Max. Operating Temperature (°C)        | Rotation or Air Flow Direction |
| * Expected Sound Level (dBA)              |  | Water and Dust Protection Class (IPXX) | Isulation Class                |
| Motor Operating Protections               |  | Speed Control Type                     | Certificates                   |
| Operating Voltage Range (V)               |  | Wire Length and Connector Requirements | Wiring Mode                    |
| Fan Efficiency (η)                        |  | Motor Efficiency (η)                   | Fan Operation Control          |

### Key Commercial Requirements

|                                      |  |                                       |  |
|--------------------------------------|--|---------------------------------------|--|
| Total Quantity Demand                |  | Quantity and Date for the First Order |  |
| Quantity of Sample                   |  | Sample Demand Time                    |  |
| Packing Demand                       |  | Type of Shipping                      |  |
| * Recipient's Name and Mobile Number |  | * Detail Receiving Address            |  |

Client's Other Requirements:

Such as: non-standard fan size (mm), special installation requirements, special working and operating environment, etc

PBM MOTOR AND FAN(SUZHOUE) CO.,LTD

Address: No.69 Weixin Road, Suzhou Industrial Park, Suzhou, Jiangsu Province, P.R.China

Phone: +86 512 6858 1674 E-mail: sales@pbmmf.com

Website: www.pbmmf.com